
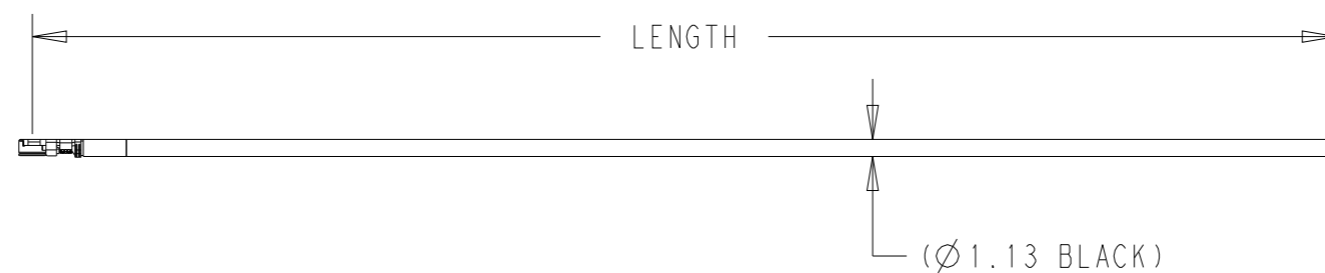


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	GTP ECN-22-147784	11APR2022	JZ	WKH

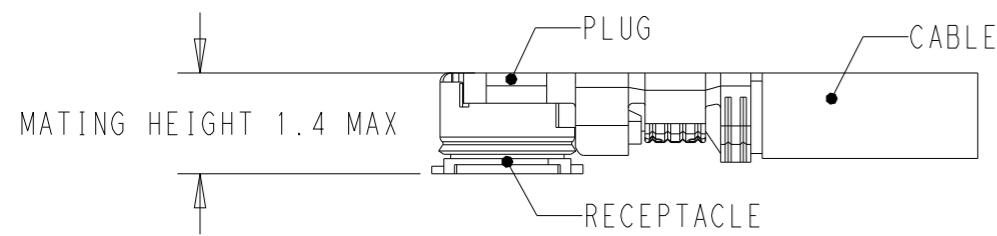

NOTES:

- PARTS AND PROCESSES ROHS COMPLIANT PER TE CONNECTIVITY STANDARD TEC-138-702.
- PRODUCT RATING:  
CHARACTERISTIC IMPEDANCE: 50 OHMS Normal  
FREQUENCY RANGE: DC TO 9GHz
- CABLE ASSEMBLY TO BE 100% OPEN & SHORT TESTED
- UMCC GEN4 CAN MATE WITH I-PEX MHF4L AND HIROSE W.FL SERIES

1-2411069-0	500±5
2411069-9	450±5
2411069-8	400±5
2411069-7	350±5
2411069-6	300±5
2411069-5	250±5
2411069-4	200±3
2411069-3	150±3
2411069-2	100±3
2411069-1	50±3
P/N	LENGTH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JZ	01APR2022				
		CHK	WKH	01APR2022				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME RF CA, UMCC GEN4-PIGTAIL WITH 1.13MM CABLE			
		0 PLC	±-		PRODUCT SPEC 108-2231			
		1 PLC	±0.1		APPLICATION SPEC -			
MATERIAL		2 PLC	±0.01		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		3 PLC	±0.001		A3	00779	G-2411069	-
		4 PLC	±0.0001		CUSTOMER DRAWING			SCALE
		ANGLES	±-					10:1
		FINISH	-					SHEET
			-					1 OF 1
			-					REV
			-					A