

## SUMMARY

### # Wires

Low voltage	10
Coax	1



Image is for illustrative purpose only

Series	2P
Termination type	Male crimp mixed / multi coax
IP rating	50
AWG wire size	30.00 - 22.00
Cable Ø	7.30 - 9.20 mm
Status	active
Matching parts	<a href="#">CLB.810.GLL1G</a>

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CA*: Straight plug with cable collet and nut for fitting a bend relief
Keying	No keying
Housing Material	PSU (Polysulfone), gray
Weight	10.07 g

### Performance

Configuration	2P.810 : 1 Coax (50 Ohm), 10 Low V.
Insulator	L: PEEK for solder contacts
Rated Current	5 Amps

### Specifications

Test voltage (kV rms) Contact-contact: 1.25  
Air clearance min.: 0.9 mm  
Creepage distance min.: 0.9 mm


### Others

Endurance (Shell): >1000 mating cycles  
Temp (min / max): -50°C / +150°C

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

---

## DRAWINGS

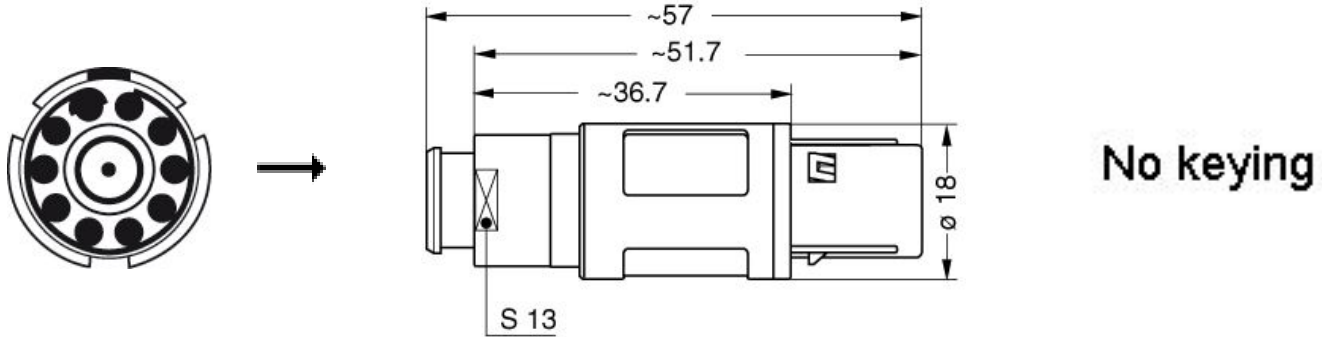

---

## RECOMMENDED BY LEMO

### Tools

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*