


P1: M-005

P2: M-048A

Customer No.: No.:1

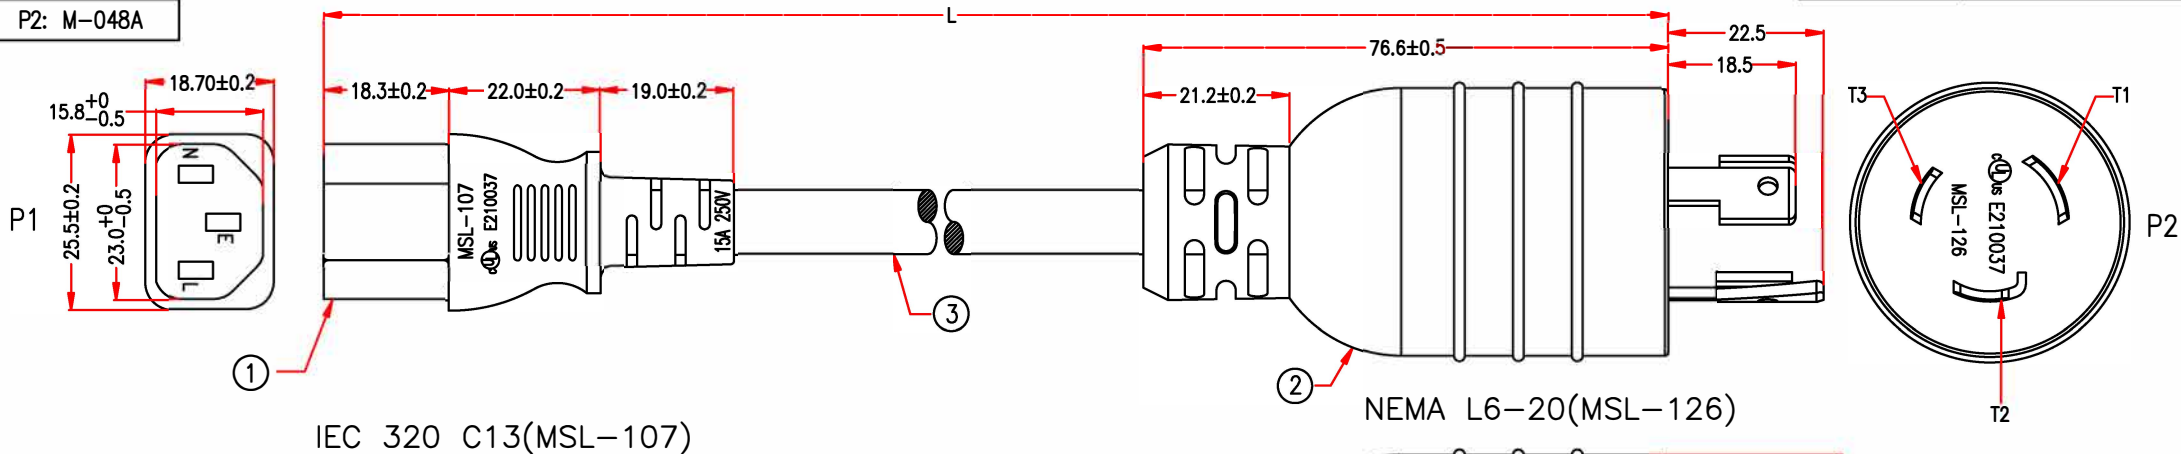


P1

P2

IEC 320 C13(MSL-107)

NEMA L6-20(MSL-126)

PACKING :



MARKING: (UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978
 CSA SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V 204790 MSL

107126B2F14A(FP283-00)

P1	P2
BLACK L	T1
WHITE N	T3
GREEN E	T2

P1,P2: E210037

NOTE: All relevant materials are complied with RoHS directive .
 THE MARKING IS CONCAVE LETTERING MOULD

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No.EPSVT011403C-147	H5TC21-0304K09	L-20mm	M304	
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: YS-L6	A1QC58-0767	1	M767	
	TERMINAL: 97656BL-0 (T3)	A1QB39-0257	1	M257	
	TERMINAL: 97655BL-0 (T2)	A1QB41-0257	1	M257	
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: YS-003	A1QC14-0767	1	M767	
	TERMINAL: 2*4mm 98744L	A1QB42-0257	3	M257	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED							Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm
CHECKED	HU	05/SEP/18	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS			
DRAWING	XIAO	05/SEP/18	PRODUCT NO.	PWCD-L620PC13-15A-XXF-BLK			UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm