





Data sheet | Item number: 756-5311/040-100

Sensor/Actuator cable; M12A plug; straight; 4-pole; Length: 10 m

[www.wago.com/756-5311/040-100](http://www.wago.com/756-5311/040-100)

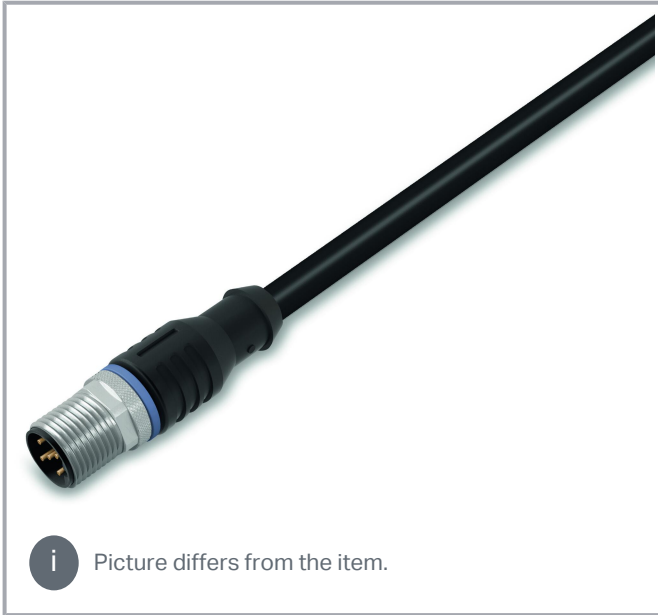

**i** Picture differs from the item.

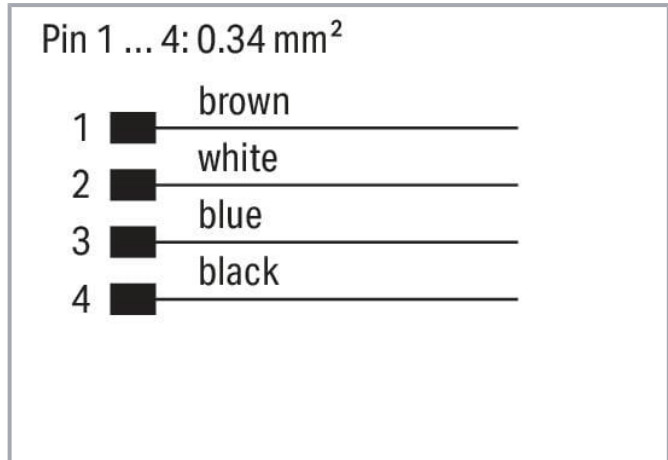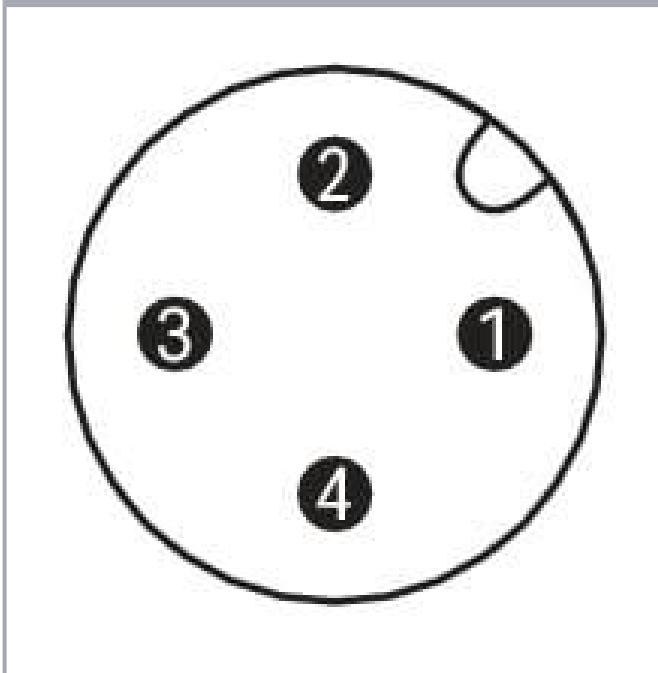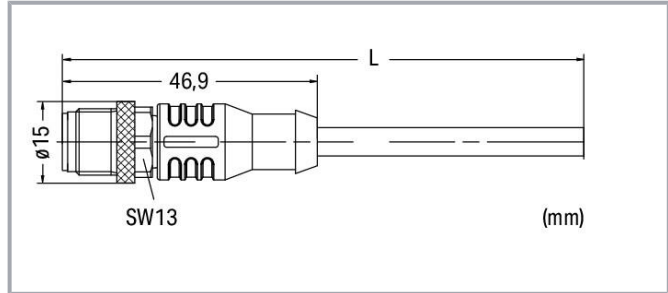

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Item description

### Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

## Data

### Technical data

#### General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

#### Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

#### Cable

Cable length	10 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.5 ... 4.9 mm

## Connector

Connection type	M12 plug - free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

## Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454942113
Customs tariff number	85444290900

## Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	44e541ed-dcaa-4eab-ba44-e4c58251d6c7
SCIP notification number (Belgium)	1681aade-8369-42d0-96e6-66d7350d77ac
SCIP notification number (Bulgaria)	6bf13a3b-6599-4542-9ec7-61d0c04dc039
SCIP notification number (Czech Republic)	f58d0f2a-0992-4e45-a544-be0fc7c6e3b6
SCIP notification number (Denmark)	8760d0a6-a1d4-4a88-8f88-dd5d2c81a5a4
SCIP notification number (Finland)	c7c72e23-6494-4cad-ad07-0f130a172aea

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	9bc7dc7a-9a49-4976-aea8-709b9238745b
SCIP notification number (Germany)	025395c6-b7b6-456b-a3a2-955b6a1e77e8
SCIP notification number (Hungary)	f802c668-cfd8-4d84-9f8e-9557b51fdd61
SCIP notification number (Italy)	d102f9f9-45b8-4b82-92be-76c9aa3eb936
SCIP notification number (Netherlands)	6635f4b3-6da8-4529-986a-c77852335f63
SCIP notification number (Poland)	58578500-9412-4c83-8fd7-0e2ec00c6e16
SCIP notification number (Romania)	efc685fa-62da-4902-ac80-b0dc1bf2ee78
SCIP notification number (Sweden)	b73020b9-962b-4313-a592-6eed5b830151

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

## Downloads

### Documentation

#### Bid Text

756-5311/040-100 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5311/040-100 doc - Datei	2017 Sep 20	doc 26.6 kB	Download

#### System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

## CAD/CAE-Data

### CAE data

WSCAD Universe 756-5311/040-100	URL	Download
WSCAD Universe 756-5311/040-100	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 756-5311/040-100

URL

Download

Sensor/Actuator cable; M12A plug; straight; 4-pole; Length: 10 m

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.