


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	M.3	REVISED PER ECO-21-004618	12MAR2021	A.L	H.L

AS SHOWN 24 POS.

指示穴は40極品以上に適用。  
 THESE HOLES ARE APPLIED TO 40 POS OR MORE.

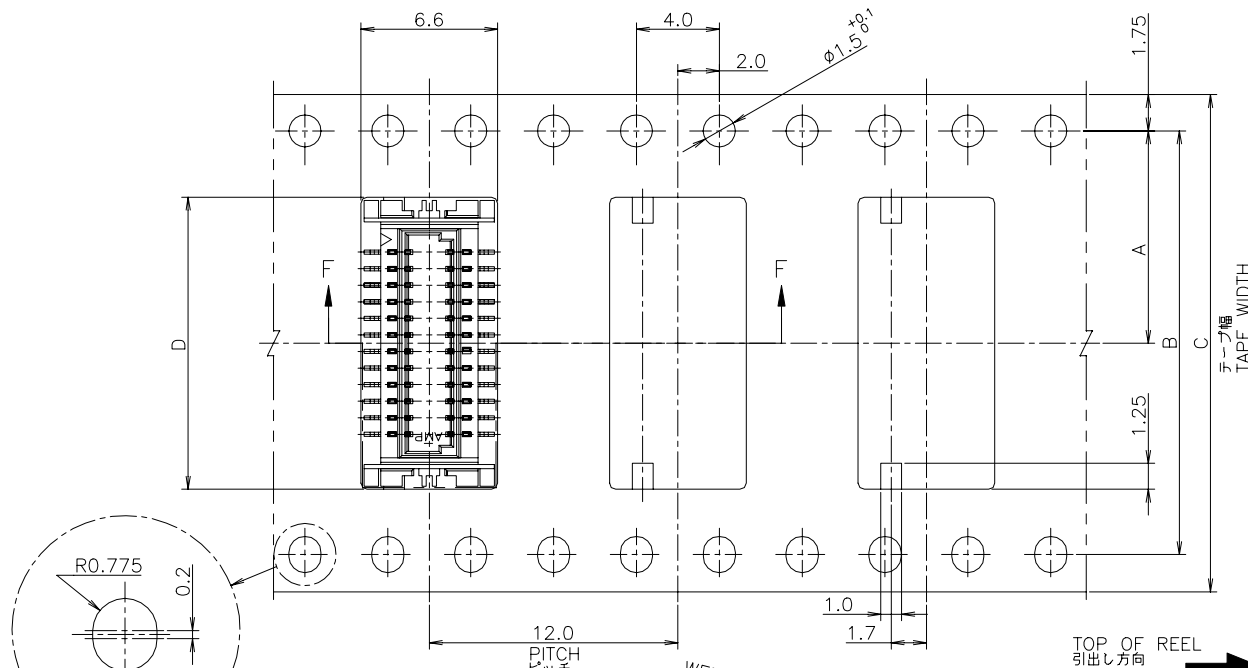

WEEDING THE COVER TAPE AROUND THE OUTER PERIPHERY IN A TURN.  
 カバーテープ リーダー部 外周一巻  
 剥離角度、165°~180° PEELING ANGLE.

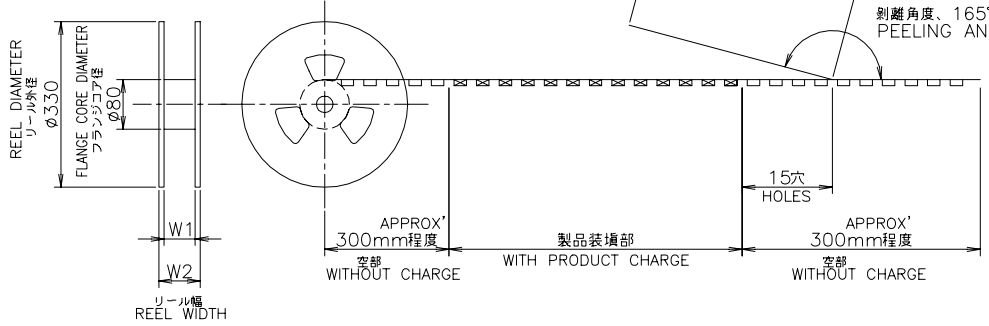

OBSOLETE	BLACK	29.5	25.5	0.38	16.5	24	11.5	1500	30	3	179397-5
OBSOLETE	BEIGE	49.5	45.5	0.38	24.5	44	20.2	1500	50	5	179397-0
OBSOLETE		37.5	33.5		20.5	32	14.2		40	4	0
OBSOLETE					16.5				30	3	0
OBSOLETE		29.5	25.5		14.1	24	11.5		24	2	4
OBSOLETE					10.9				16	1	6
OBSOLETE		21.5	17.5	0.38	10.1				14	1	4

INSTRUCTION SHEET  
 取扱説明書  
 411-5654

色	W <sub>2</sub>	W <sub>1</sub>	E	D	C	B	A	数量 (ヶ)	極数	リール巻 コネクタ型番 TAPING P/N
ベージュ BEIGE	22.4	16.4	0.4	9.3	16	7.5	1500	12	1-179397-2	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
0 PLC ± 0.2	1 PLC ± 0.2
2 PLC ± 0.2	3 PLC ± 0.2
4 PLC ± 0.2	ANGLES ± 0.2
MATERIAL 材料	FINISH 仕上

**TE** TE Connectivity Ltd.

ON TAPING EMBOSS  
 0.8mm PITCH B-T-B CONNECTOR  
 MATING HEIGHT 3.0mm

108-5424

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C=179397 RESTRICTED TO: /

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 2 REV: M3