

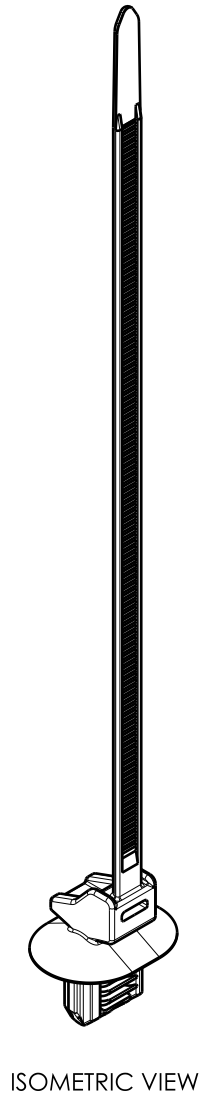


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.1	Design Release	-	SEE ECN# 014676	TAT	9/26/18	CJR	9/26/18

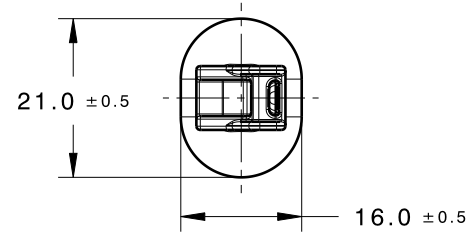

- REFERENCE:  
 PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:  
 1. SHEET METAL THICKNESS RANGE: 0.70mm - 5.00mm  
 2. APPLICABLE HOLE SIZE:  
     A. 6.5 X 13.0mm +/-0.25  
 3. CABLE TIE MIN LOOP TENSILE STRENGTH: 180 NEWTONS (40 LBS)  
 4. BUNDLE RANGE: 1.5mm TO 35.0mm  
 5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%  
 6. MAX ALLOWABLE FLASH TO BE: 0.5mm  
 7. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

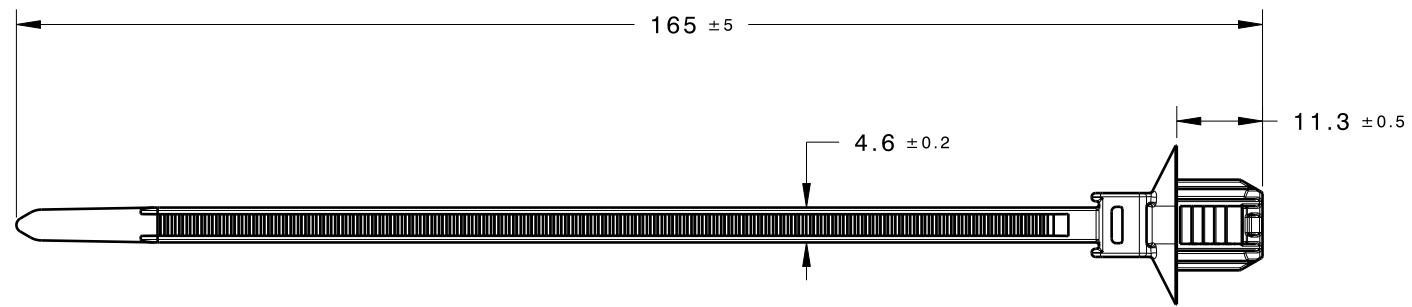

Material PA66HIRHSUV COLOR: BLACK	Units <b>millimeters</b>	Tolerance defined on each dimension	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	KVH	1/30/18	Article/Type-No	T50SOS3DOP65X130-E	Scale	1:1
				Approved	CJR	2/2/18	Title	CABLE TIE WITH OVAL HOLE FIR TREE	Project Number	NT188-06
				 North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	B
							06-0188-000-CSU			Sheet