


Data sheet | Item number: 706-2300/404-100

System cable; for Siemens S7-300; 8 analog inputs (current), var. 1; Length: 1 m; Conductor cross-section: 0.25 mm²



www.wago.com/706-2300/404-100

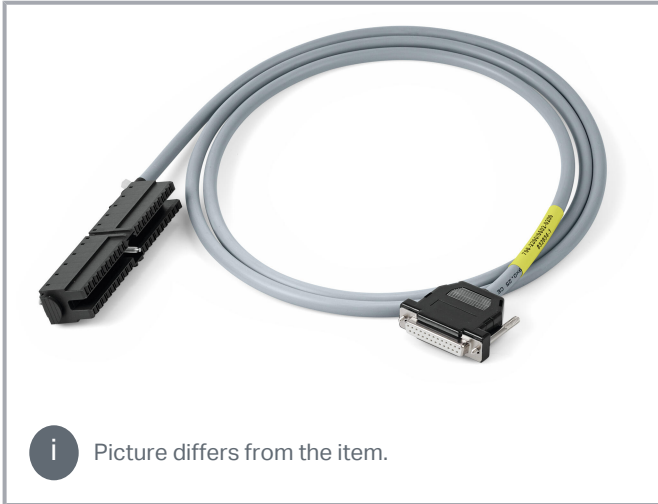

i Picture differs from the item.

Color coding acc. to DIN VDE 47100	25 poles Sub-D connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	IN0+	2+22	CH0+I
Brown	2	IN0-	3+23	CH0-I
Green	3	IN1+	4+24	CH1+I
Yellow	4	IN1-	5+25	CH1-I
Grey	5	IN2+	6+26	CH2+I
Pink	6	IN2-	7+27	CH2-I
Blue	7	IN3+	8+28	CH3+I
Red	8	IN3-	9+29	CH3-I
Black	9	IN4+	12+32	CH4+I
Violet	10	IN4-	13+33	CH4-I
Grey-Pink	11	IN5+	14+34	CH5+I
Red-Blue	12	IN5-	15+35	CH5-I
White-Green	13	IN6+	16+36	CH6+I
Brown-Green	14	IN6-	17+37	CH6-I
White-Yellow	15	IN7+	18+38	CH7+I
Yellow-Brown	16	IN7-	19+39	CH7-I
White-Grey	17	nc	nc	nc
Grey-Brown	18	nc	nc	nc
White-Pink	19	nc	nc	nc
Pink-Brown	20	nc	nc	nc
White-Blue	21	nc	nc	nc
Brown-Blue	22	nc	nc	nc
White-Red	23	nc	nc	nc
Brown-Red	24	nc	nc	nc
White-Black	25	nc	nc	nc
Shield	Connected to Sub-D			

**Data
Notes**

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	8 analog inputs; current
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Compatibility

Siemens

Siemens S7-300	6ES7 331-7NF00-0AB0
----------------	---------------------

Connection data

Cable type	LIYCY
Color code	per DIN VDE 47100

Connection 1

Connector	D-subminiature female connector
Connection type 1	System
Wire cross-section	0.25 mm ²

Connection 2

Connector 2	Siemens 6ES7-392-1BM00-0AA0
Pole number 2	25
Connection type 2	System

Physical data

Cable length	1 m
--------------	-----

Material Data

Weight	215 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Subject to changes. Please also observe the further product documentation!

Commercial data

Product Group	30 (WAGO France)
eCl@ss 10.0	27-24-22-20
eCl@ss 9.0	27-24-22-20
ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Country of origin	FR
GTIN	4045454881696
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Optional accessories

Interface module

Interface module



Item no.: 704-8013

Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or www.wago.com/704-8013 output; 4-wire; PCB terminal blocks; in mounting carrier

Downloads

Documentation

Bid Text

706-2300/404-100 X81 - Datei	2019 Feb 19	xml 3.2 kB	Download
706-2300/404-100 doc - Datei	2015 Feb 9	doc 26.1 kB	Download

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

System Description

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-2300/404-100

www.wago.com/706-2300/404-100



WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB

Download

CAD/CAE-Data

CAE data

WSCAD Universe 706-2300/404-100

URL

Download

WSCAD Universe 706-2300/404-100

URL

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-2300/404-100

URL

Download

System cable; for Siemens S7-300; 8 analog inputs (current), var. 1; Length: 1 m;
Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.