

- **Shrink Temp. 194°F**
- **Flame Retardant**
- **Versatile & Economical Termination Solution**
- **Wide Selection of Sizes and Colors**
- **Resists Common Automotive Chemicals**
- **Mil-I-23053/5**

Shrinkflex heatshrink tubing is the ideal way to create a tight, professional finish on any wire, hose, or cable management project.

## 2:1 Polyolefin Heatshrink Tubing

When economy is priority, 2:1 Shrinkflex heatshrink tubing is the answer. Not as versatile as a high ratio shrink product, 2:1 will still slide easily over small inline splices and connectors and provide a tight seal in many applications.




Shrinkflex shop spools fit into our dispenser kit (pg. 101) for easy storage and organization.

| Nominal Size | Part #    | Unshrunk Diameter | Shrunk Diameter | Standard Spool Put-Ups |            | Available Colors           | Lbs/100' |
|--------------|-----------|-------------------|-----------------|------------------------|------------|----------------------------|----------|
|              |           |                   |                 | Bulk Spool             | Shop Spool |                            |          |
| 3/64"        | H2N0.05   | 1.3mm             | 0.6mm           | 500'                   | 25'        | 11                         | 0.16     |
| 1/16"        | H2N0.06   | 1.8mm             | 0.8mm           | 500'                   | 25'        | 11                         | 0.22     |
| 1/8"         | H2N0.13   | 3.4mm             | 1.6mm           | 500'                   | 25'        | 11                         | 0.43     |
| 3/16"        | H2N0.19   | 5.0mm             | 2.4mm           | 250'                   | 25'        | BK & CL                    | 0.60     |
| 1/4"         | H2N0.25   | 6.4mm             | 3.2mm           | 250'                   | 25'        | 11                         | 1.04     |
| 3/8"         | H2N0.38   | 9.5mm             | 4.8mm           | 200'                   | 25'        | 11                         | 1.31     |
| 1/2"         | H2N0.50   | 12.7mm            | 6.4mm           | 200'                   | 25'        | 11                         | 1.52     |
| 5/8"         | H2N0.63   | 16.7mm            | 8.0mm           | 100'                   | 25'        | 11                         | 2.12     |
| 3/4"         | H2N0.75   | 19.1mm            | 9.4mm           | 100'                   | 25'        | 11                         | 2.58     |
| 1"           | H2N1.00   | 25.7mm            | 12.7mm          | 100'                   | 25'        | 11                         | 3.74     |
| 1 1/2"       | H2N1.50   | 38.1mm            | 19.1mm          | 100'                   | 25'        | 11                         | 5.53     |
| 2"           | H2N2.00   | 51.0mm            | 25.4mm          | 100'                   | 25'        | 11                         | 8.25     |
| 3"           | H2N3.00   | 76.2mm            | 38.1mm          | 100'                   | 25'        | BK, CL, GN, GY, RD, WH, YL | 13.15    |
| 4"           | H2N4.00BK | 101.6mm           | 50.8mm          | 100'                   | 25'        | BK                         | 23.50    |
| 6"           | H2N6.00BK | 152.4mm           | 76.2mm          | 82'                    | 25'        | BK                         | 28.00    |



## 3:1 Polyolefin Heatshrink Tubing

The high shrink ratio of 3:1 Shrinkflex heatshrink tubing ensures that the tubing will slip over large connectors or plugs and still provide a tight, professional seal.

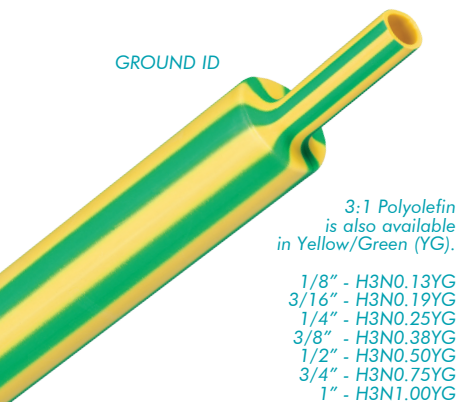

| Nominal Size | Part #  | Unshrunk Diameter | Shrunk Diameter | Standard Spool Put-Ups |            | Available Colors | Lbs/100' |
|--------------|---------|-------------------|-----------------|------------------------|------------|------------------|----------|
|              |         |                   |                 | Bulk Spool             | Shop Spool |                  |          |
| 1/16"        | H3N0.06 | 1.5mm             | 0.5mm           | 500'                   | 25'        | 11               | 0.18     |
| 1/8"         | H3N0.13 | 3.0mm             | 1.0mm           | 500'                   | 25'        | 11 & YG          | 0.37     |
| 3/16"        | H3N0.19 | 4.5mm             | 1.5mm           | 250'                   | 25'        | 11 & YG          | 0.55     |
| 1/4"         | H3N0.25 | 6.0mm             | 2.0mm           | 250'                   | 25'        | 11 & YG          | 0.74     |
| 3/8"         | H3N0.38 | 9.0mm             | 3.0mm           | 200'                   | 25'        | 11 & YG          | 1.01     |
| 1/2"         | H3N0.50 | 12.0mm            | 4.0mm           | 200'                   | 25'        | 11 & YG          | 1.28     |
| 3/4"         | H3N0.75 | 18.8mm            | 6.0mm           | 100'                   | 25'        | 11 & YG          | 1.87     |
| 1"           | H3N1.00 | 24.0mm            | 8.0mm           | 100'                   | 25'        | 11 & YG          | 2.86     |
| 1 1/2"       | H3N1.50 | 38.0mm            | 13.0mm          | 100'                   | 25'        | 11               | 4.51     |
| 2"           | H3N2.00 | 50.0mm            | 17.0mm          | 100'                   | 25'        | 11               | 6.33     |
| 3"           | H3N3.00 | 75.0mm            | 25.4mm          | 100'                   | 20'        | BK               | 10.33    |





# Shrinkflex - Printed With Your Logo Or Part Number For Branding And Identification

Techflex is happy to provide this unique service for our customers. Our proprietary heatshrink printing process allows you to select from our available combinations of heatshrink products and design your own customized heatshrink tubing.

You can choose from any of our 11 tubing colors (pg. 80), and 9 ink colors: black, blue, gold, green, purple, red, silver, white, and yellow.

Your finished art will be prepared by our graphics department and printed on our high resolution equipment. Please contact your account representative for more details.



**• PRINTING • LOGOS • ID NUMBERS • CUT PARTS • JIT**  
*Put your company's brand where your customers will see it!*



1-973-300-9242  
www.techflex.com