


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | 50-00135 | Connector, dc plug, 4.75x1.7xL18.0 mm, molding style, spring contacts | 1 | |
| 2 | 30-00692 | Wire, 2C TS, 24 AWG, UL2464, 300V, 80C, 4.0 mm, VW-1, PVC | 1 | |
| 3 | 24-00008 | Overmold, PVC | 1 | black |

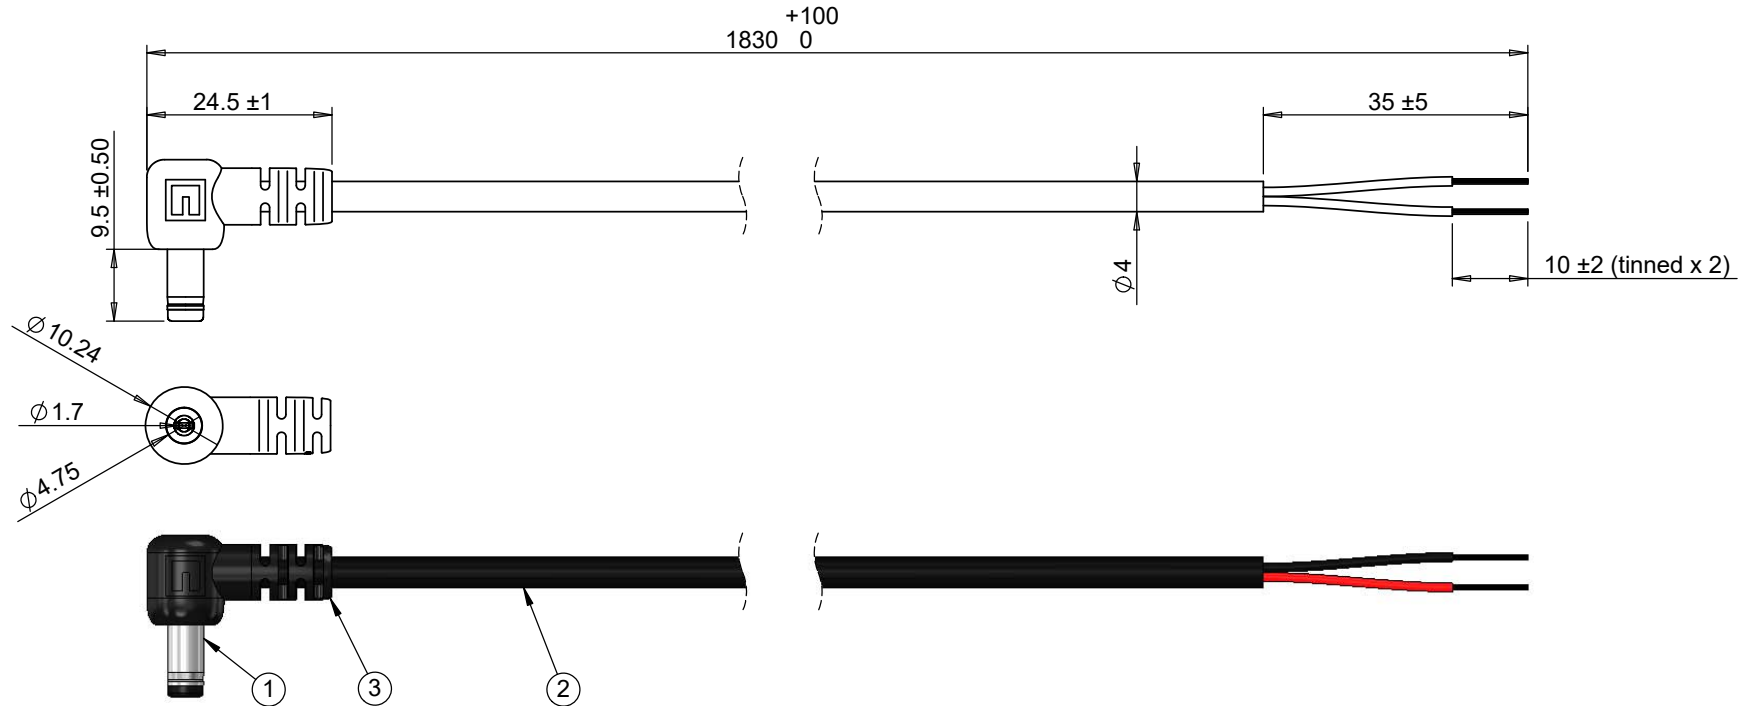

Notes:
Functionally equivalent components may be substituted

Electrical requirements: 4 A, 12 Vdc

| Wiring Diagram | |
|----------------|------------|
| 50-00135 | wire color |
| center | red |
| sleeve | black |

| | | | | | |
|-----------|-----------|-----------------|--|---|--|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 9/13/2016 | Initial release | DN <small>Digitally signed by DN Date: 2017.01.30 13:49:53 -08'00'</small> | RoHS compliant | |
| | | | Verified: PS <small>Digitally signed by PS Date: 2017.01.30 15:28:29 -08'00'</small> | Function test: no open, no short circuit, no intermittent | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 1830 mm, 4.75x1.7x9.5 mm 90° 50-00135 plug to stripped tinned, 24 AWG, 30-00692 wire | |
| | | | | Size: A | Part number: 10-02231 |
| | | | | Scale: 1:1 | Sheet 1 of 1 |