

RoHS Compliant



Specifications:
 Material And Finish:
 Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Phosphor Bronze
 Plated:See Ordering Information

Rating:
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information
 CS25582-XXX-M36-0X

- A:Ziplock bag + Barcode+Box
- C:In Tray
- E:W/Cap In Tube
- F:W/Cap In Tape&Reel
- 0:W/O Peg
- 1:W/Peg
- G:Gold Flash
- S:Selective Gold Plated
- T:Tin Plated
- No. of Positions

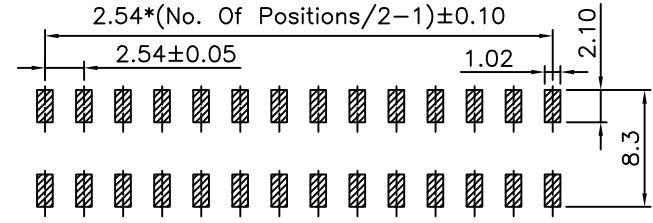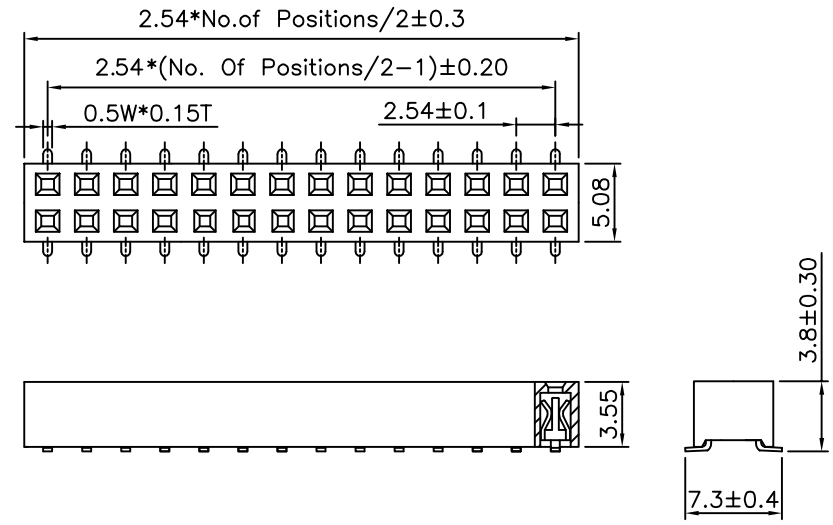

(Tolerance:0.05)
 Recommended PCB Layout

A5				DR.BY.:	<i>Tom Liu</i>	TITLE :	2.54mm Pitch PCB Socket Header SMT Type	GENERAL TOLERANCE:						
A4				CHKD.:	<i>Jack Wu</i>	PART NO :	CS25582-XXX-M36-0X	LINEAR	ANGLES					
A3						DWG. NO.:	CXRD110523-292	X.: ±0.30	X': ±5.0'					
A2				APPD.:	<i>Kane He</i>	DATE:	May-23-2011	X.X: ±0.20	X.X': ±3.0'					
A1	ORIGINAL	<i>Tom Liu</i>	May-23-2011					X.XX: ±0.15	X.XX': ±2.0'	UNIT:	SCALE:	SHEET:		A4
REV.	ECN. NO.	DR.BY	DATE					X.XXX: ±0.10	X.XXX': ±1.0'	mm	1:1	1/1		