


Ŧ	Ω (<u>п</u>	m	<u>о</u>

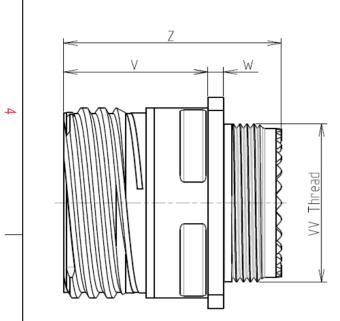

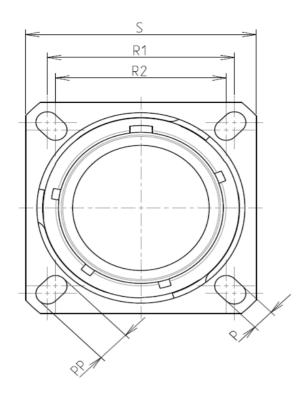



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

21

Κ

72

А


F

А

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 31.75 R1 29.36 R2 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 31.5 Max Ζ VV THREAD M31x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

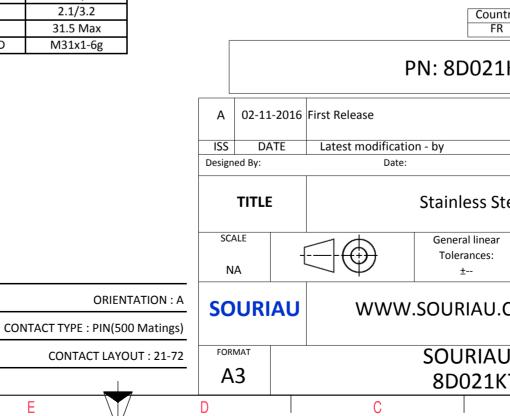

	Φ		A				
					4		
AS EXA	AMPLE				3		
r any non-conformity or damage s which does not comply with er of the Parties or by a third party ndation, technical notice.)							
Intry R	Jurisd	iction & Con Not Listed	trol List		2		
1K72AA							
		CUSTON		MOD N°			
Stee	customer drawing teel Receptacle 8D series						
ar	NPRDS / PROJECT						
			59	perty of	1		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
UDRG N° SHEET							
K7	2AA-C		A	1/2	J		
	В		А				

r	т	۵	г т –	m	D	0
4		Contact Layout 72				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	2#4 Power 6#16 21-72 X Y			¥	
ω	A B C D E F G H	0 6.19 8.5 4.3 6.25 0 8.5 -4.3 0 -6.19 -8.5 -4.3 -6.25 0 -8.5 4.3				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for an due to a use of the Products wh
N						the Specifications issued by either of (professional recommendat Countr FR PN: 8D021
					A 02-11-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:
-					SCALE NA SOURIA	Stainless Ste General linear Tolerances: ± U WWW.SOURIAU.C
	Н	G	F	E	FORMAT A3	SOURIAU.C SOURIAU 8D021K

