

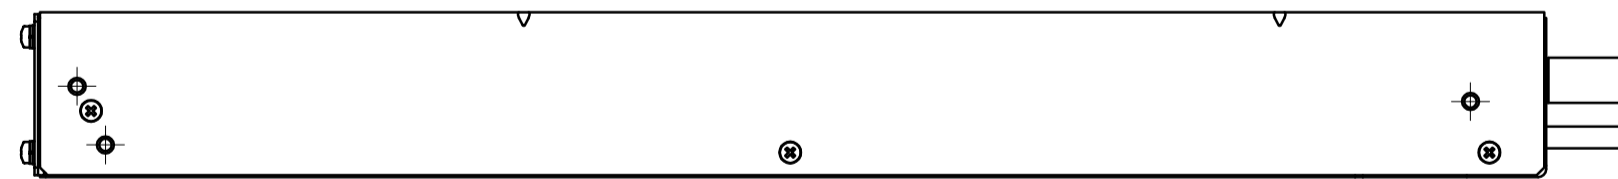
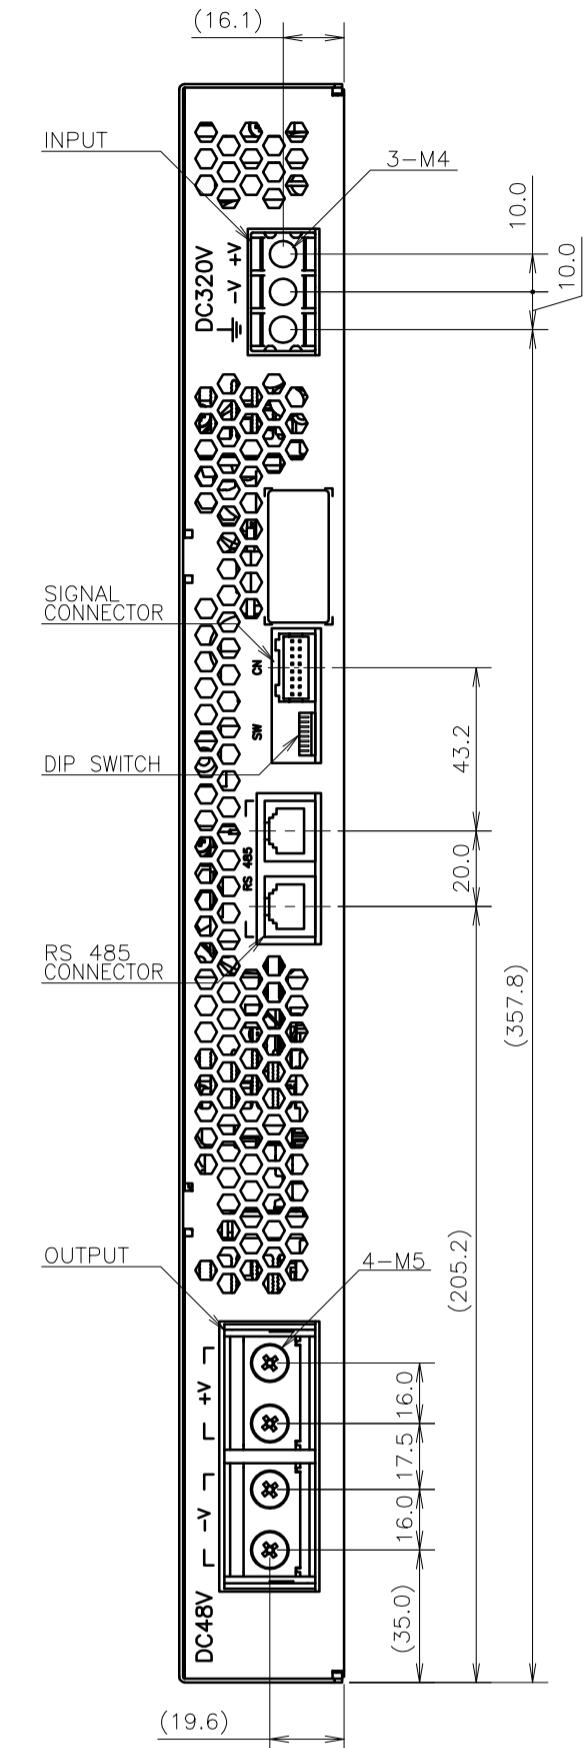
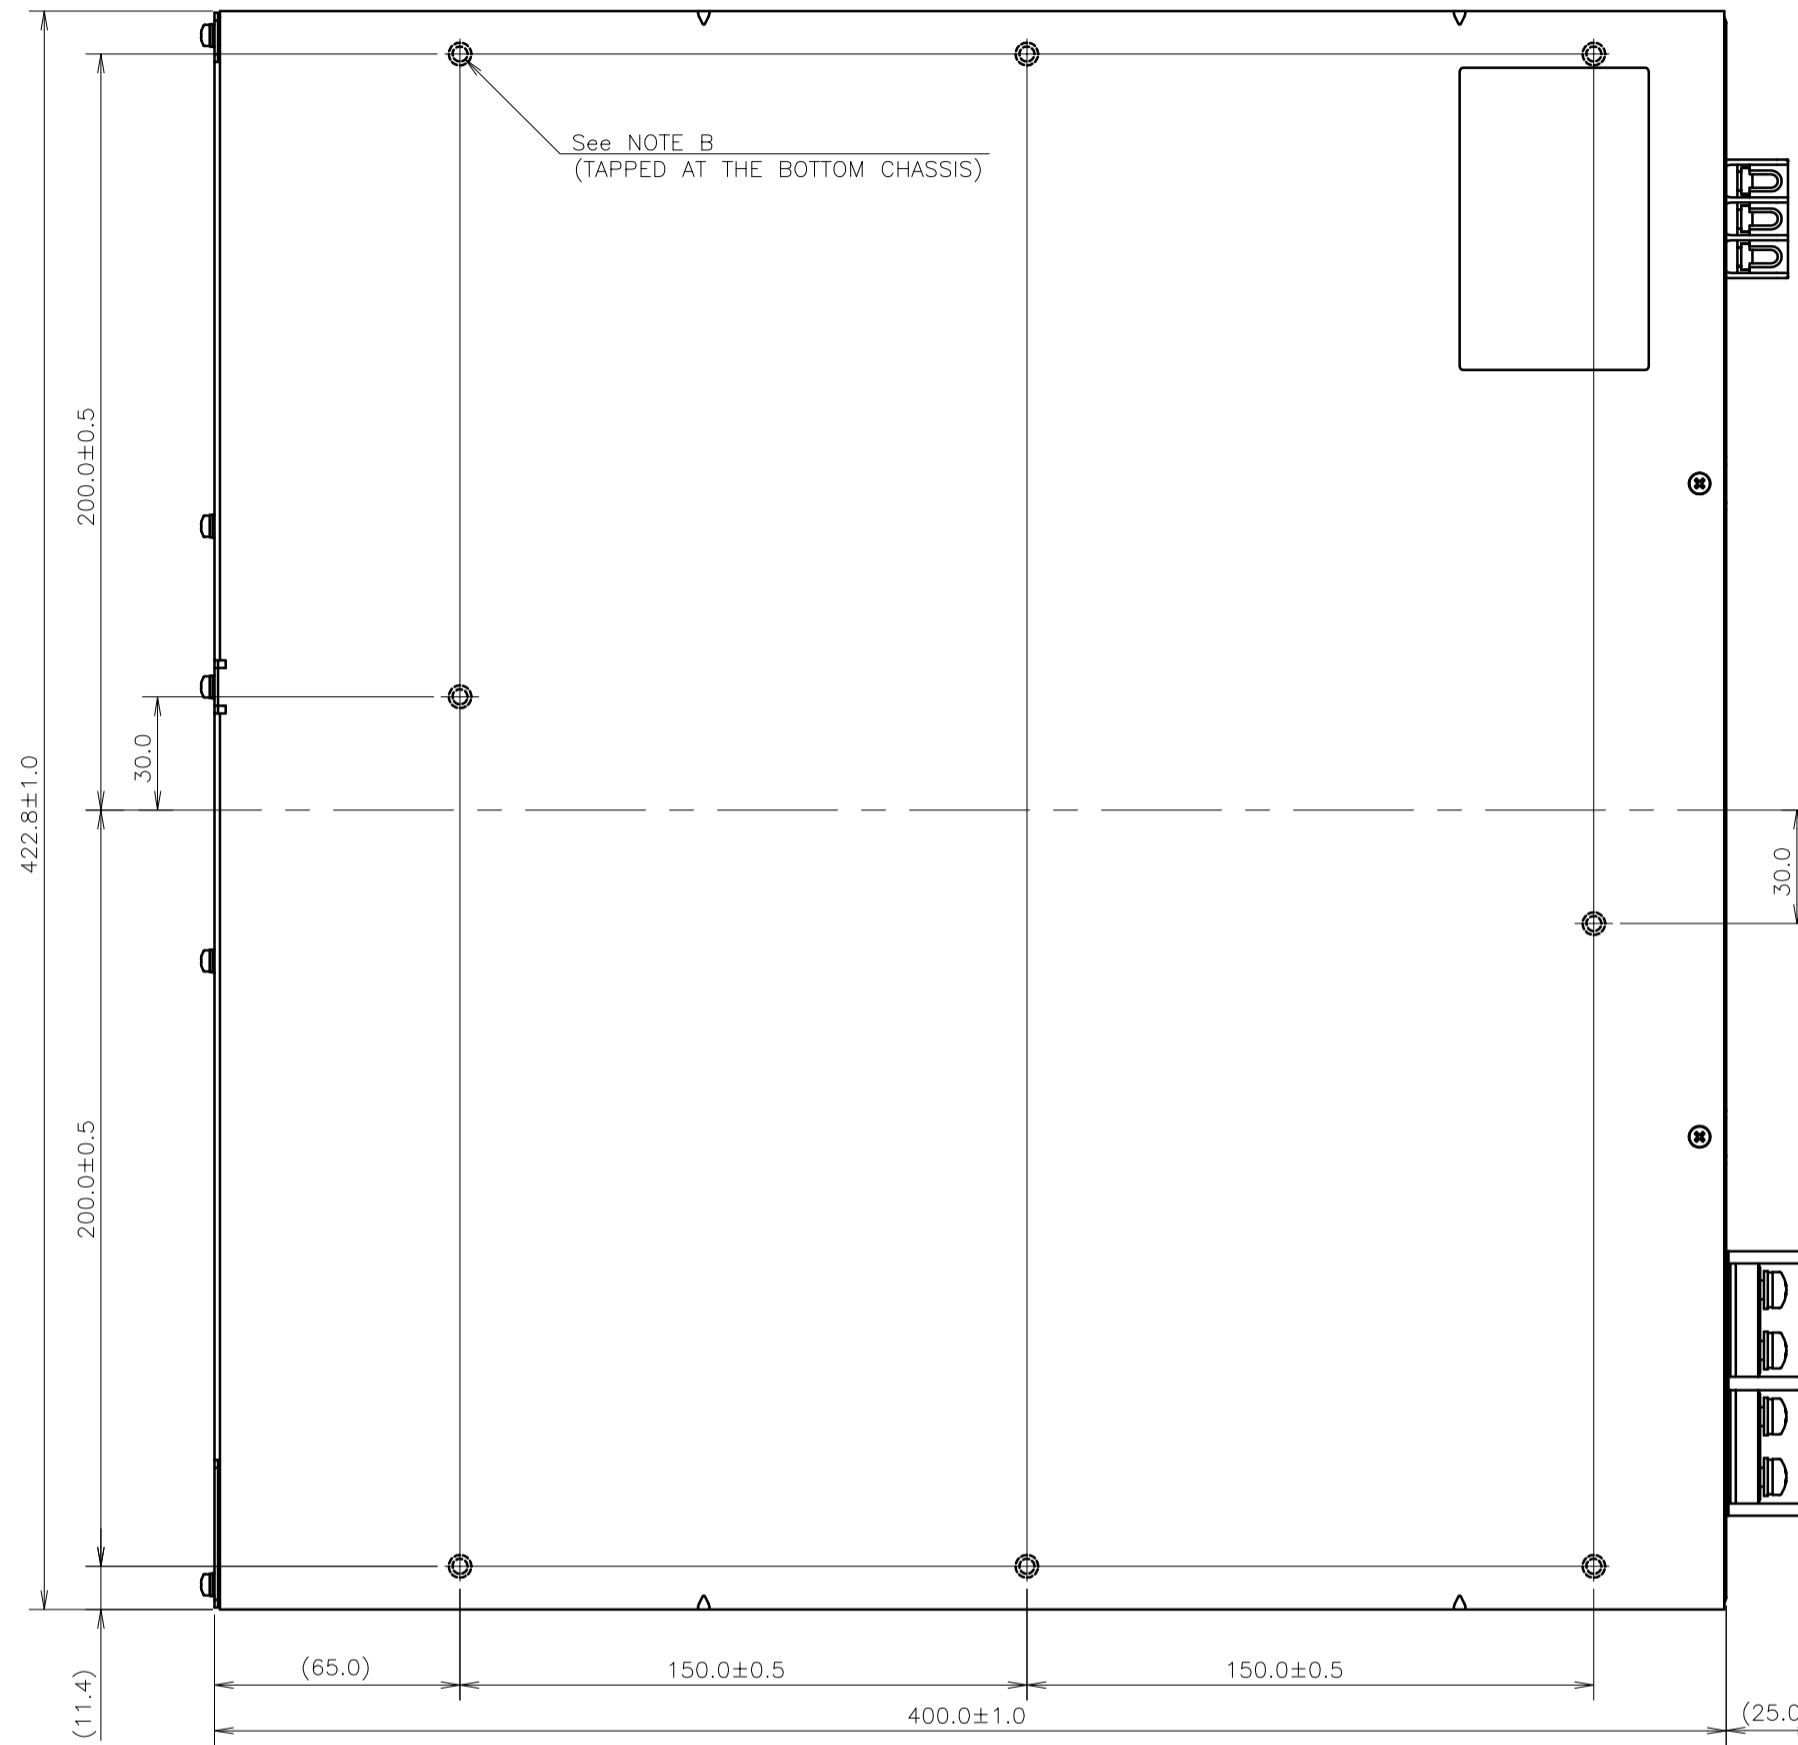


AIR FLOW →

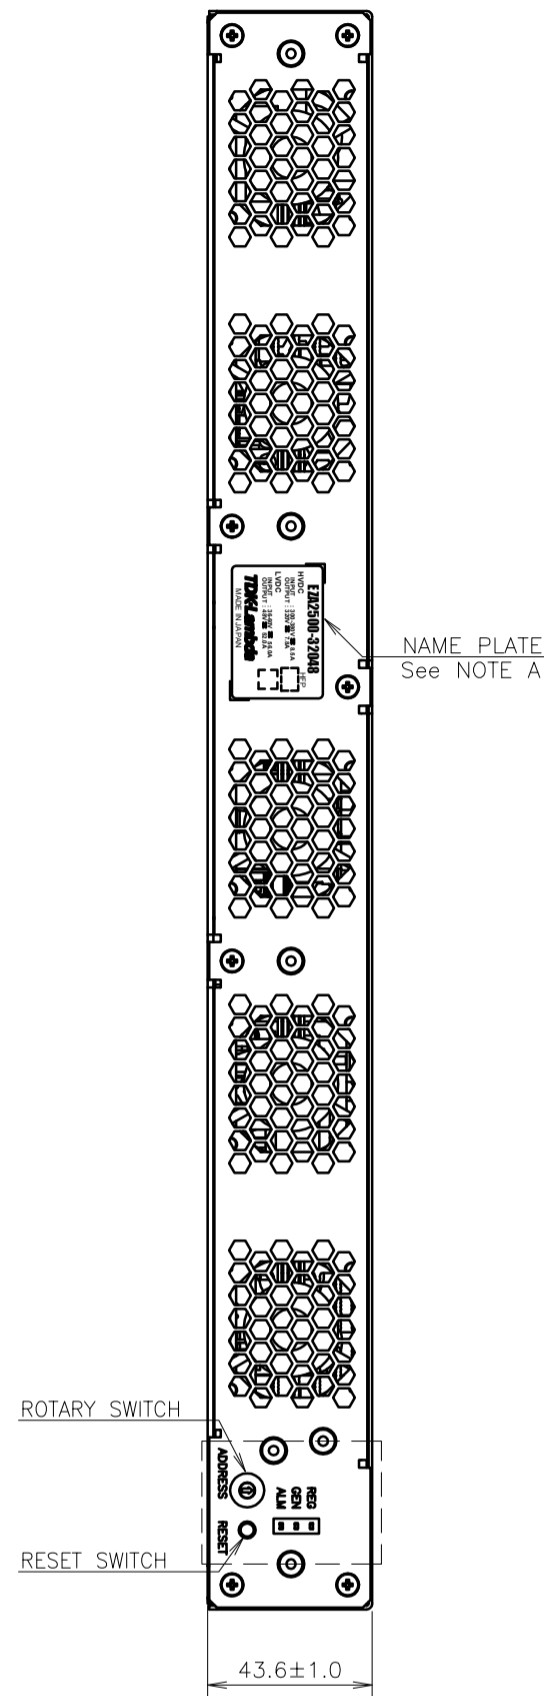

NAME PLATE DETAILS




== NOTES ==


A : MODEL NAME, NOMINAL OUTPUT VOLTAGE AND NOMINAL OUTPUT CURRENT ARE SHOWN IN THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS.

B : M4 TAPPED HOLES (BOTTOM net.8) FOR CUSTOMER CHASSIS MOUNTING. (SCREW PENETRATION DEPTH 6mm MAX.)

FRONT DISPLAY DETAILS

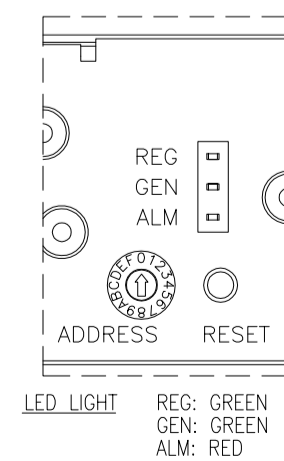

SIGNAL CONNECTOR INFORMATION

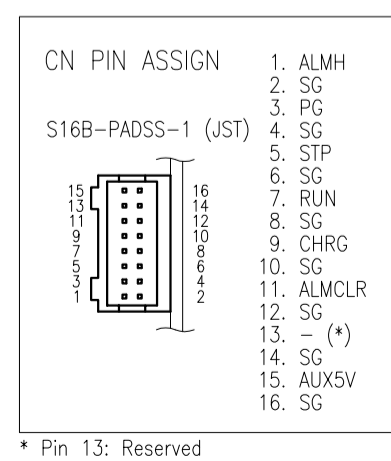

== SIGNAL CONNECTOR USED ==

PART DESCRIPTION	PART NAME	MANUFACT
PIN HEADER	S16B-PADSS-1(LF)(SN)	JST

== MATCHING HOUSINGS, PINS & TOOL ==

PART DESCRIPTION	PART NAME	MANUFACT
SOCKET HOUSING	PADP-16V-1-S	JST
TERMINAL PINS	SPH-001T-P0.5L(AWG26~22) SPH-002T-P0.5L(AWG28~24)	JST
HAND CRIMPING TOOL	AP-K2N	JST

== RS 485 CONNECTOR USED ==

PART DESCRIPTION	PART NAME	MANUFACT
PIN HEADER	TM21R-5C-88(50)	HIROSE

(unit : mm)

MODEL NAME	EZA2500-32048
<b>TDK-Lambda</b>	

V008-02-01