




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	D1	ECR-13-017177	05NOV13	PKSRRP



IDENTIFICATION NO. FOR MAGNET WIRE RANGE

- FOR MAG-MATE CAVITY SPECIFICATION REFER TO APPLICATION SPEC #114-2066.
- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

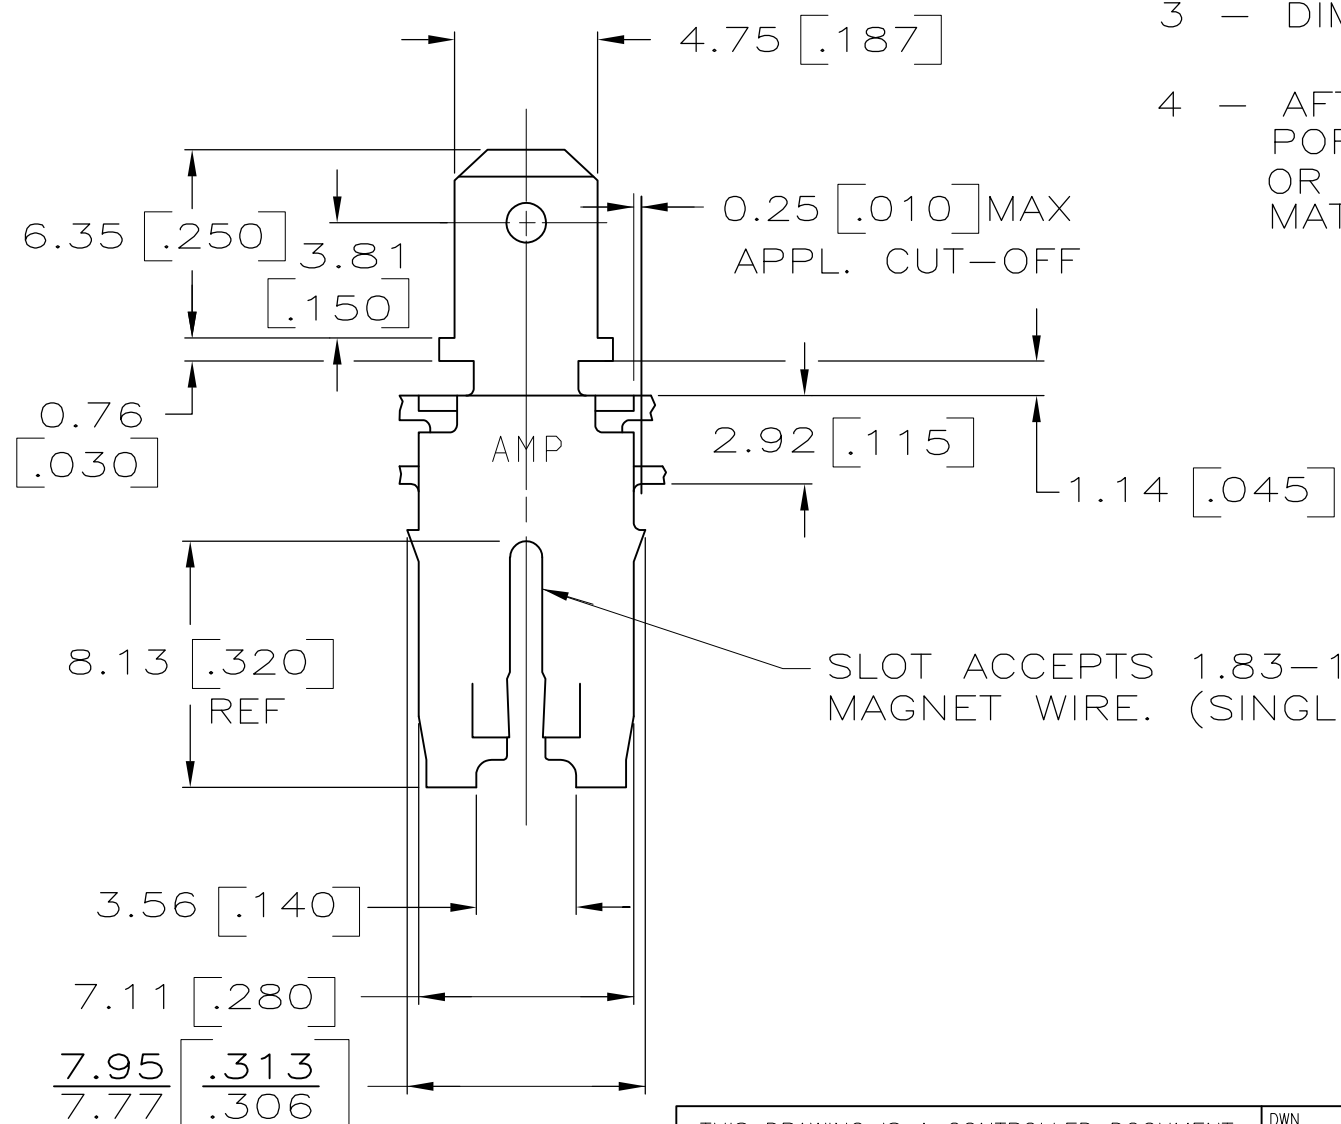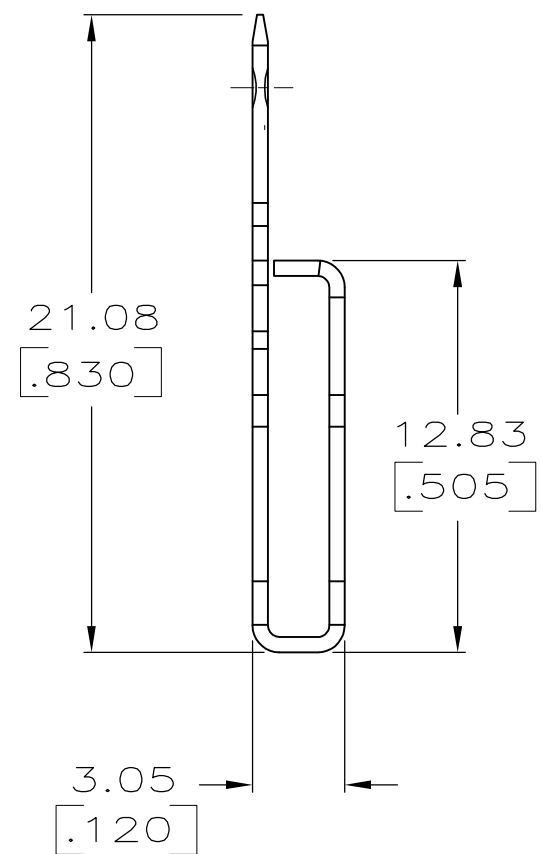

SLOT ACCEPTS 1.83-1.54<sup>DIA</sup> MM [#13-14.5] COPPER MAGNET WIRE. (SINGLE WIRE ONLY)

**METRIC**

63428-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	2-12-86	<b>STE</b> TE Connectivity			
DIMENSIONS: INCHES		CHK	C ATHERTON	2-12-86				NAME
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	G YETTER	2-12-86	MAG-MATE 187 FASTON TAB			
0 PLC ± -		PRODUCT SPEC		-				
1 PLC ± -		APPLICATION SPEC		-				
2 PLC ± -		SIZE	A3	CAGE CODE	00779	DRAWING NO	C-63428	
3 PLC ± 0.38 [.015]		WEIGHT		-			RESTRICTED TO	
4 PLC ± -		CUSTOMER DRAWING					SCALE	NTS
ANGLES ± -		MATERIAL: BRASS					SHEET	1 OF 1
FINISH: TIN		REV					D1	