


 (L)	 	0	0

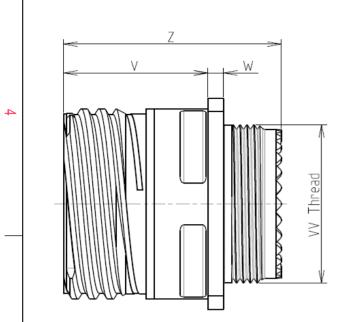

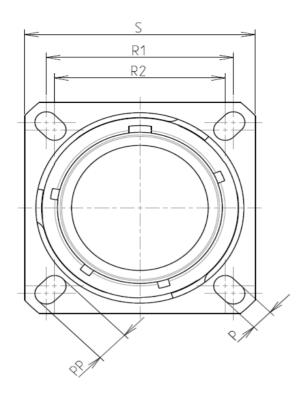



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 15

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 500 hours

: 45.69 g ± 10%

8D 0

G

15

S

05

Ρ


F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M22x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

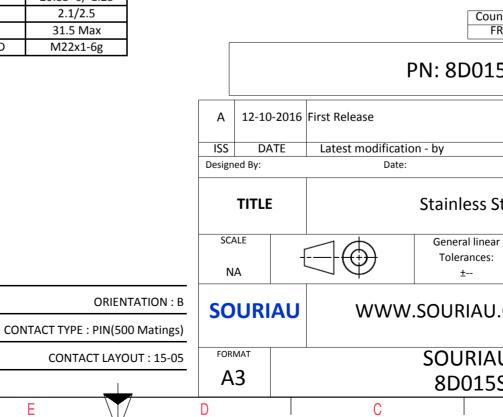

Φ		A			
				4	
AS EXAMPLE				3	
any non-conformi					
s which does not co er of the Parties or I adation, technical n	by a third par otice.)				
untry Jurisc FR	liction & Con Not Listed	trol List		2	
.5S05PB					
	CUSTOME		MOD N°		
Steel Recepta	customer drawing teel Receptacle 8D series				
ar	NPRDS / PROJECT				
		59	perty of	1	
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°			SHEET		
SO5PB-C		A	±/ £	J	
5	I				

		۵	וד	m	D	0	
		Contact Layout					Panel Cutou
4	د 	$x = \begin{bmatrix} \Phi & \Phi \\ \Phi & \Phi $				SQUARE FLANGE RECEPTA REAR MOUNTIN	CLE (TYPE O)
		X-axis (mm)         Y-axis (mm)           +.000 (0.00)         +.100 (2.54)           +.174 (4.42)         +.024 (0.61)           +.094 (2.39)        148 (3.76)          094 (2.39)        148 (3.76)          174 (4.42)         +.024 (0.61)					ØT
ယ							Dim ØA ØAA R1 ØT
	-					due to a the Specificat	all not be liable for any use of the Products wh ions issued by either of essional recommendat
0							Countr FR
					A 12-1	10-2016 First Release	PN: 8D0159
					Designed By:		ite:
-					SCALE NA	.ε ↓ ↓ ⊕	General linear Tolerances:
					SOUR	NAU WW	W.SOURIAU.C
					FORMAT A3		SOURIAU 8D015S0
	Н	G	F	E	D	C	

