


**CONNECTOR SPECIFICATION:**

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

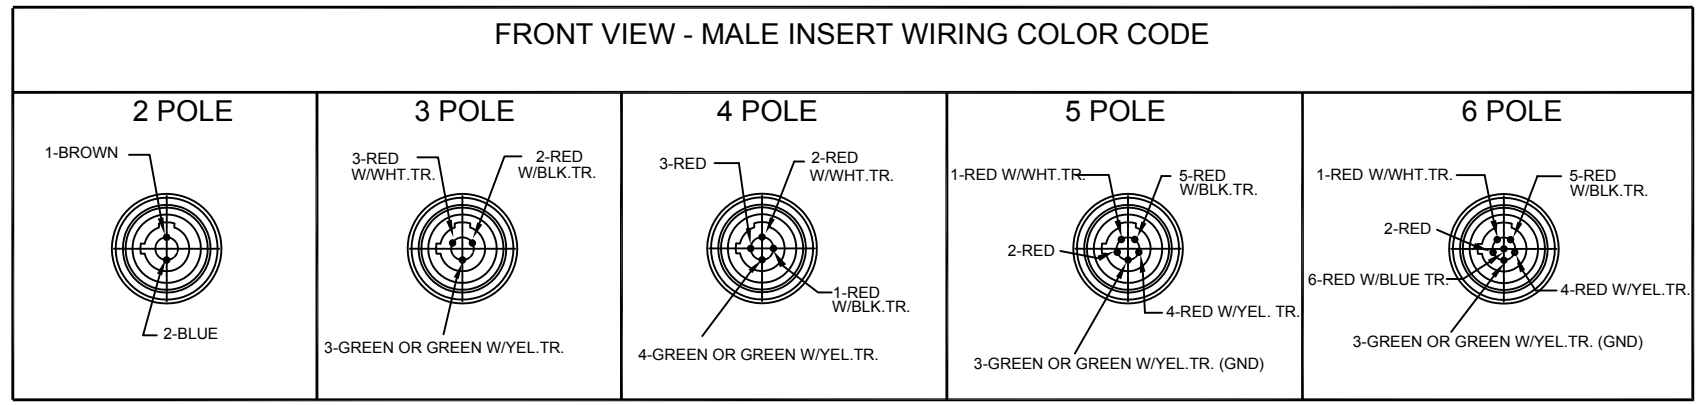

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLING NUT	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 18 AWG (41x#34 COPPER STRANDING) 2-6 CONDUCTORS 300V	PVC	YELLOW

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CH'KD: NS APPR: FPACHER 08.03.10 2010/03/10	QUALITY SYMBOLS ▽ = 0 ▽/C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																		
		<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±---</td> <td>±.01</td> </tr> <tr> <td>1 PLACE</td> <td>±0.3</td> <td>±---</td> </tr> <tr> <td colspan="3" style="text-align: center;">ANGULAR ± --- °</td> </tr> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±---	±.01	1 PLACE	±0.3	±---	ANGULAR ± --- °			DRAWN BY DATE LSTEMMLE 2010/02/08 CHECKED BY DATE FP 2010/03/09 APPROVED BY DATE FPACHER 2010/03/09	<b>MICRO-CHANGE CORDSET                  2-6P DUAL KEYWAY MA 90                  #18/2-6 YELLOW PVC CABLE</b>		
		mm	INCH																					
4 PLACES	±---	±---																						
3 PLACES	±---	±---																						
2 PLACES	±---	±.01																						
1 PLACE	±0.3	±---																						
ANGULAR ± --- °																								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE SHEET 2	MATERIAL NO. SD-120072-018	DOCUMENT NO.	SHEET NO. 1 OF 2	<b>MOLEX INCORPORATED</b> THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			

10

9

8

7

6

5

4

3



2

1

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200720315	703007A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200725019	704007A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200721010	705007A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

DESCRIPTION EC NO.: WEU2010-0417 DRWN: LSTEMMLE 08.03.10 CH'KD: NS APPR: FPACHER 2010/03/10 REV 3	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
	 = 0  = 0	mm	INCH	IN/MM		1:1	METRIC	MICRO-CHANGE CORDSET 2-6P DUAL KEYWAY MA 90 #18/2-6 YELLOW PVC CABLE		
	4 PLACES ±---	±---	±---	DRAWN BY DATE						
	3 PLACES ±---	±---	±---	LSTEMMLE 2010/02/08						
	2 PLACES ±---	±.01	±---	CHECKED BY DATE						
1 PLACE ±0.3	±---	±---	FP 2010/03/09							
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE		MATERIAL NO.		SHEET NO.		
				FPACHER 2010/03/09		SEE TABLE		2 OF 2		
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
						DOCUMENT NO. SD-120072-018				

10

9

8

7

6

5

4

3

2

1