




Data sheet | Item number: 756-5312/050-050

Sensor/Actuator cable; M12A plug; angled; 5-pole; Length: 5 m

www.wago.com/756-5312/050-050



i Picture differs from the item.

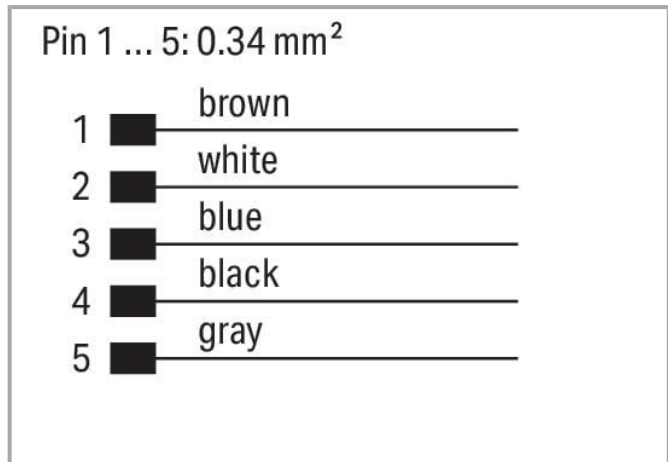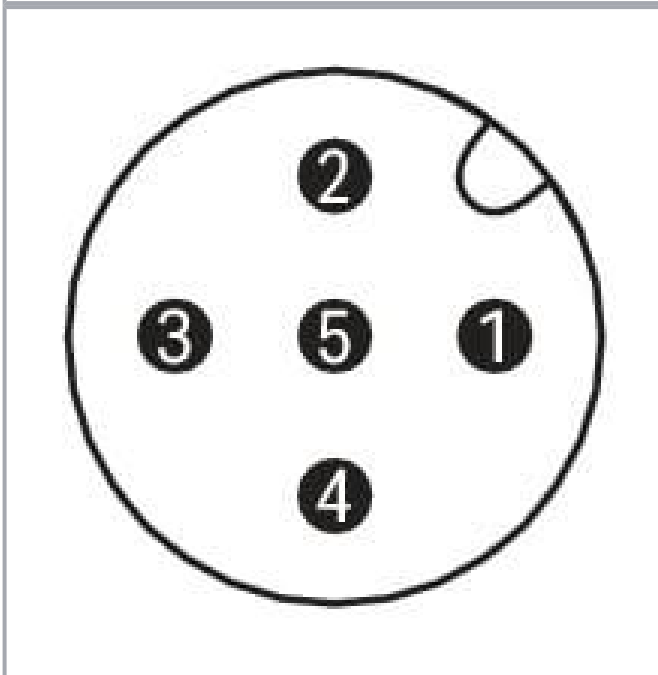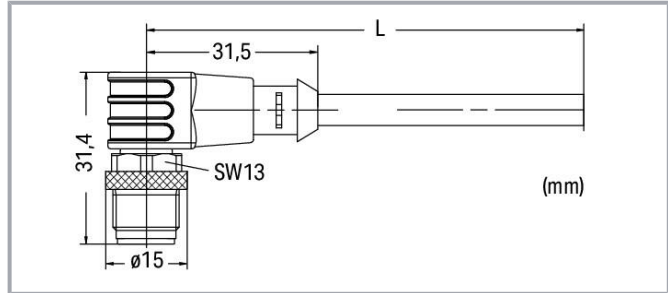

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.8 ... 5.2 mm

Connector

Connection type	M12 plug - free end
Cable connection direction to mating direction	90 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454942342
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	85493e23-605e-4e63-945d-eab5ec2cfa87
SCIP notification number (Belgium)	1208a4af-3e81-44e8-b9b1-216d45672ecf
SCIP notification number (Bulgaria)	302b9c6a-3797-47b8-8316-7183feacba1
SCIP notification number (Czech Republic)	4eab60ee-847a-4a72-ad41-060fdf2aa66d
SCIP notification number (Denmark)	3cedf192-fb4c-4fec-8c7a-e47a84b33e17
SCIP notification number (Finland)	5a50bb8d-15a1-4427-97c0-6ad31ddd87fc

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	1a5099b9-a5f4-4c8a-8031-6482b9951a18
SCIP notification number (Germany)	51d68deb-0798-4581-ae23-5f4dd3368519
SCIP notification number (Hungary)	1f2621b8-0bd1-444a-8ed7-8eeb08fafaff
SCIP notification number (Italy)	c0095e30-ffb2-464a-bf6c-a901fcb8783a
SCIP notification number (Netherlands)	fcc7f4ad-89c1-4a51-aedf-6bf62da0e711
SCIP notification number (Poland)	6b1e6703-12e8-4d86-8864-dfa4ceb9b617
SCIP notification number (Romania)	c74305b6-16f3-4102-9647-e714a88a0530
SCIP notification number (Sweden)	5a1b56c4-2858-4002-a838-d776cec900df

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5312/050-050 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5312/050-050 doc - Datei	2017 Sep 20	doc 27.1 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5312/050-050	URL	Download
WSCAD Universe 756-5312/050-050	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5312/050-050
Sensor/Actuator cable; M12A plug; angled; 5-pole; Length: 5 m

URL

Download

Installation Notes

Subject to changes. Please also observe the further product documentation!