


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Date Code & Part No., Black Text.
3. Single Centered Marker on Cables of 6" and longer
4. Sweep Tested to validate Max VSWR @ Max Freq.
5. Store Hi-Point Data.

ConductRF(wk/yr)
V3A33-PGMPMF-xxx

Marker Example

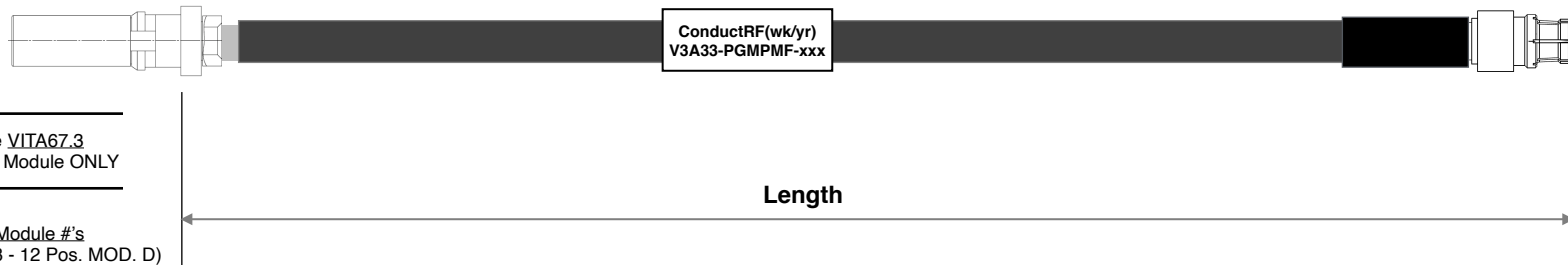

SMPS to Populate VITA67.3
SV Microwave Plug-In Module ONLY

Use with SV Microwave Module #'s
SF9311-60166 (VITA67.3 - 12 Pos. MOD. D)
SP9311-60171 (VITA67.3 - 19 Pos. MOD. C)

CRF #	Length	Typ. Insertion Loss(dB)		
		6GHz	12GHz	18GHz
S06	6"	0.73	1.03	1.27
S08	8"	0.91	1.29	1.58
S12	12"	1.27	1.81	2.22
S16	16"	1.64	2.32	2.85
S24	24"	2.36	3.36	4.13
VSWR Max.		1.40:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
SXX = Length in Inches (eg S18=18")
XXM = Length in Meters (eg 2M5=2.5m)
CXX = Length in CM (eg C50=50cm)

5	Strain relief	Shrink Tube	Black
4	Label marker	Shrink Tube	White
3	Cable - Low Loss Flex	A33RFJ	FEP Black
2	SMPS Male for Plug-In Mod.	PGM13A-A33G01	Gold
1	SMPM Female	PMF11B-A33G01	Gold
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: VITA67.3 SMPS for SV Plug-In Module to SMPM Female on 0.047" Cbl.			
2	Updated Length Ref.		DG	02/17/21	Remarks: 035/035/5	Originated: 02/11/21	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: VITA Sheet 1 of 1	
1	Pre-Release		DG	02/11/21			Dwg Ref: V3A33-PGMPMF		
					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 2	Part No: V3A33-PGMPMF-XXX
REVISION HISTORY									