


CXR SERIES

CX COMMERCIAL LIGHTING CONTROL PANELS

FEATURES

- Relays are mounted to individual relay cards
- Four types of relays - 20A/1P, N/O and 20A/2P, N/O, N/C (14K SCCR) and 30A 1P latching (18K SCCR)
- Smart Relay card self-identifies type automatically to panel
- Each relay includes 1 programmable input for low voltage switches, photocells or motion sensors
- Relay cards include a manual override control button and LED status indication

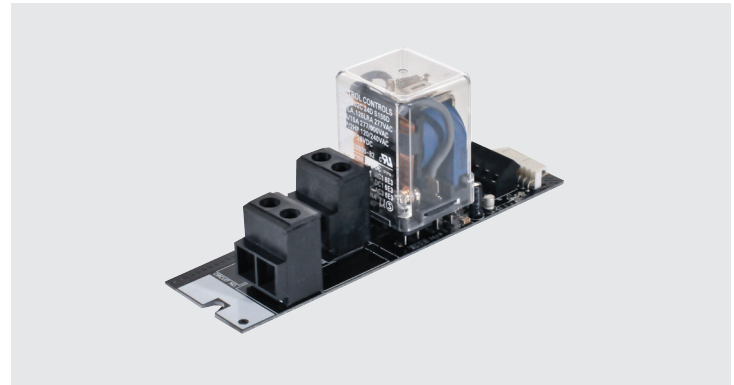

RELATED PRODUCTS

[CX Lighting Control Panels](#)

[CXPBAR](#)

SPECIFICATIONS

CONSTRUCTION

- Mounts inside a CX series panel
- Pre-drilled mounting hole for securing relay card
- Individual relay cards - 1P and 2P are equal size
- 1.625" W x 5.5"L (41.28mm W x 139.7mm L)
- Green - Indicates relay is in closed position
- Red- Dependant on input being programmed

INSTALLATION

- 32°-112°F (0°-50°C)
- Relative humidity (non-condensing): 10%-90%
- Wire size 14, 16, 18, 20, 22 AWG
- Recommended tightening torque: 0.45 N-M (4 IN-LBS.)

ELECTRICAL

- CXR2N 120/277VAC (50/60Hz)
- CXR3L 120/277/347VAC (50/60Hz)
- CXR3LEM 120/277/347VAC (50/60Hz)
- CXRTN 208/240/480VAC (50/60Hz)
- CXRTC 208/240/480VAC (50/60Hz)
- CX04/CX08; 24VDC, 150mA (max. 300mA)
- CX16/CX24; 24VDC, 150mA (max. 900mA)
- 500A @ 2ms (CXR3LEM only)

CERTIFICATIONS

- UL 916, CAN/CSA C22.2 No.205
- UL 924, CAN/CSA C22.2 No. 141 Emergency Lighting (CXR3LEM)

WARRANTY

- 5 year limited
- See [HLI Standard Warranty](#) for additional information

ORDERING GUIDE

Example: CXR2N

CATALOG # _____


CXR	Relay Type
Model	
CXR CX lighting control panel relay	2N 1-Pole, Elect. Held N.O. 20A@120VAC-Tungsten; 16A @ 277VAC-Elect. Ballast; 20A @277VAC-Mag. Ballast; 14K SCCR @277VAC 3L 1-Pole Latching 20A @120VAC-Tungsten; 16A @120/277VAC-Elect. Ballast; 30A @120/277VAC-Mag. Ballast; 20A @347VAC-Elect. Ballast; 18K SCCR @347VAC 3LEM 1-Pole, Latching 20A @120VAC-Tungsten; 16A @120/277VAC-Elect. Ballast; 30A @120/277VAC-Mag. Ballast; 20A @347VAC-Elect. Ballast; 20A @347VAC-Mag. Ballast; 5K SCCR @347VAC TN 2-Pole, Elect. Held N.O. 20A @208/240/480VAC Mag. Ballast; 14K SCCR @480VAC TC 2-Pole, Elect. Held N.C. 20A @208/240/480VAC Mag. Ballast; 14K SCCR @480VAC

CXR SERIES

CX COMMERCIAL LIGHTING CONTROL PANELS

ADDITIONAL INFORMATION

Wiring Diagrams

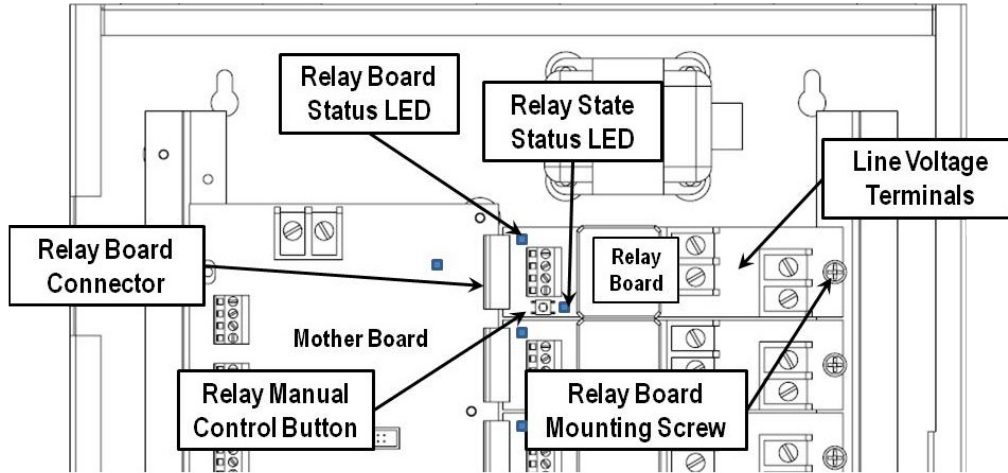

Relay Specifications

Characteristics		Load Ratings					SCCR rating
Type	Poles	VAC	Tungsten	Flour. Ballast*	HID Ballast	Motor Rating	
CXR2N - Elect Held, N.O.	1	120	20A	N/A	N/A	3/4 HP	14K Amps
		227	N/A	16A	20A	3/4 HP	
CXR3L - Latching	1	120	20A	16A	30A	1 HP	18K Amps
		277	N/A	16A	30A	N/A	
		347	N/A	20A	N/A	N/A	
CXR3LEM - Latching*	1	120	20A	16A	30A	1 HP	5K Amps
		277	N/A	16A	30A	3/4 HP	
		347	20A	20A	20A	N/A	
CXR2N - Elect Held, N.O.	2	208/240/480	N/A	N/A	20A	2 HP	14K Amps
CXR2C - Elect Held, N.C.	2	208/240/480	N/A	N/A	20A	2 HP	

* Includes mechanical override lever, suitable for use on emergency lighting circuits