


# ETHERLINE® ROBUST

## Chemical-resistant industrial Ethernet cable for flexible applications

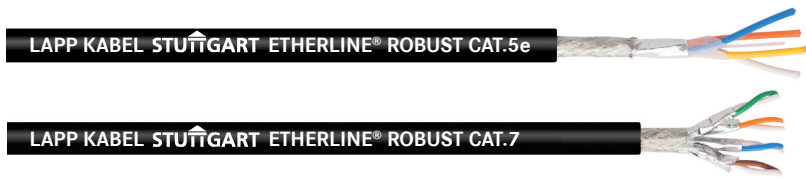

ETHERLINE® ROBUST flexible cables are suitable for CAT.5e and CAT.7 applications that require a higher level of chemical, UV, and weather resistance. They are designed with a foil and braid shield to protect against EMI and ensure reliable data transmission.

### Recommended applications

Machine tool building; medical technology; laundries; car washing equipment; chemical industry; composting plants; sewage works; food & beverage industry, especially for production and processing of dairy and meat products

### Approvals



### Construction

- Conductors:** stranded bare copper
- Pairs:** CAT.5e: 2 pair • CAT.7: 4 pair
- Insulation:** polyolefin
- Shielding:** foil and tinned copper braid
- Jacket:** TPE; black

### Application advantage

- Halogen-free materials
- Ozone-, UV-, and weather-resistant jacket
- Low smoke density
- Suitable for PoE per IEEE 802.3at (see table below)

Cable attributes <span style="float:right">page 648</span>		Complete the installation		ÖLFLEX® CONNECT solution	
OIL OR-01	FLAME FR-01	SKINTOP® MS-SC page 522	RJ45 connectors page 257	ÖLFLEX® CONNECT CABLES page 605	
MOTION FL-02	MECH. MP-01				

### Technical data

<p> <b>Minimum bend radius:</b></p> <ul style="list-style-type: none"> <li>- for stationary use: 4 x cable diameter</li> <li>- for flexible use: 10 x cable diameter</li> </ul> <p> <b>Temperature range:</b></p> <ul style="list-style-type: none"> <li>- for stationary use: -50°C to +80°C</li> <li>- for flexible use: -40°C to +80°C</li> </ul> <p> <b>Characteristic impedance:</b> 100Ω ± 15Ω</p>	<p> <b>Color code:</b></p> <ul style="list-style-type: none"> <li>- 2 pair: white &amp; yellow, blue &amp; orange</li> <li>- 4 pair: white/blue &amp; blue, white/orange &amp; orange, white/green &amp; green, white/brown &amp; brown</li> </ul>
--	--

Part number	Construction	Stranding	Jacket material	Jacket color	Approvals	PoE	Nominal outer diameter		Approx. weight	SKINTOP® MS-SC PG thread
							in	mm	lbs/mft	
<b>CAT.5e</b>										
2170451	22 AWG/2pr	7 wire	TPE	black	PROFINET®	yes	0.268	6.8	34	53112210
<b>CAT.7</b>										
2170452	23 AWG/4pr	7 wire	TPE	black	PROFINET®	yes	0.355	9.0	50	53112220
2170453	26 AWG/4pr	7 wire	TPE	black	—	no	0.256	6.5	24	53112210

PROFINET® is a registered trademark of the PNO (PROFIBUS User Organization). Recommended SKINTOP® assumes minimal OD variance. Additional configurations are available; please see our SKINTOP® section. If not otherwise specified, all values relating to the product are nominal values. Photographs are not to scale and are not true representations of the products in question.