


τ	വ	н т	m	0

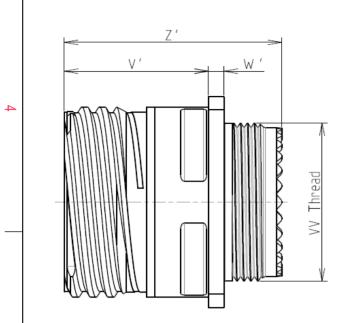

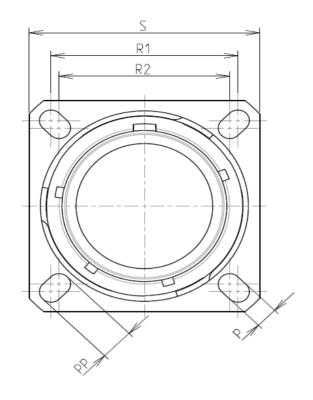



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +200°C

: 2000 hours

8D 0

G

17

Μ

22

Ρ


F

Е

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M25x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

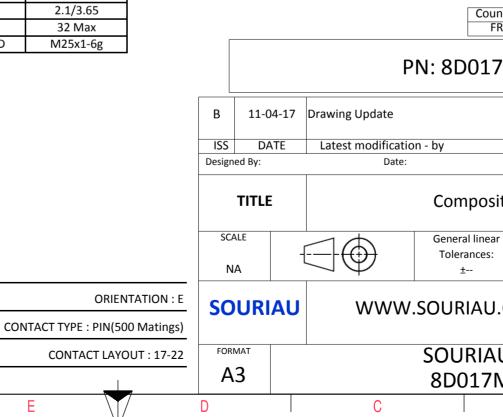

σ		Þ			
				4	
AS EXAMPLE				3	
any non-conformi s which does not co er of the Parties or l ndation, technical n untry Jurisc FR	mply with by a third part			2	
7M22PE				-	
	CUSTOMER		MOD N°		
customer drawing					
ar	NPRDS / PROJECT 859				
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° M22PE-C	1		SHEET 1/2		
B		A		J	

r	<u>т</u>	۵	гт —	m	D	0	
		Contact Layout					Panel Cut
4						SQUARE FLANGE RECEPTACL REAR MOUNTING R1	E (TYPE O)
		2#12 2#8 Triax	1				ØT
	Ctc A B	17-22 X Y 0 4.57 6.32 0				Max. thickness panel for	ØA receptacle: Type 0: front m
ယ	C D	0 -4.57 -6.32 0					ØA ØAA
							R1 ØT
	-						
						due to a us the Specificatio	Il not be liable for a se of the Products v ns issued by either ssional recommend
N							Coun FF
							PN: 8D017
						L-04-17 Drawing Update DATE Latest modificat	tion by
					Designed By		
					ТІТ	LE	Composi
_					SCALE NA		General linear Tolerances: ±
					SOU	RIAU WWV	V.SOURIAU.
					FORMAT		SOURIAI 8D017N
l	Н	G	F	E	D	C	

