




| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A | 2 1/4-16UN-2A |
| B | 44.5 |
| C | 22.2 |
| D | 3.2 |
| E | 53 |
| F | 49.2 |
| G | 63.5 |
| H | 4.4 |

| NO. | BESCHREIBUNG / DESCRIPTION |
|-----|-------------------------------------|
| 1 | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3 | DICKTKÖRPER / GROMMET |
| 4 | ENDRING / ENDRING |
| 5 | KONTAKTSTIFT/ CONTACT PIN |
| 8 | DOSENGEHÄUSE / SHELL |
| 20 | KURZES ENDGEHÄUSE/SHORT ENDBELL |

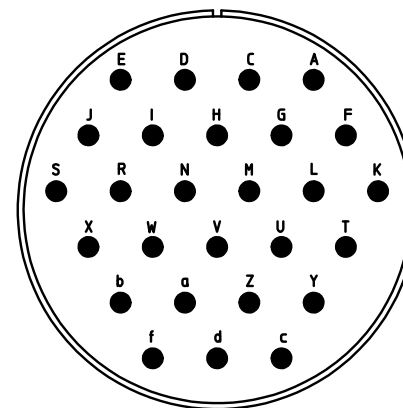

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
 Specification and Dimensions subject to change
 Drawings illustrate normal insulator positioning

| Material Specification: | |
|-------------------------|--------------------------------------------------|
| Shell Material: | Aluminium alloy |
| Shell Plating: | Olive drab chromate coating over cadmium plating |
| Insulator Material: | Neoprene |
| Contact Material: | Copper alloy |
| Contact Plating: | Hard silver |

| | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------------------|
| all dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with DIN7188m | | drawing for CUSTOMER | |
|  ITT <i>Engineered for life</i> <small>ITT CANNON GmbH D - 71384 Weinstadt/Germany</small> | description CA3100R36A46P | | |
| | Wall mounting receptacle Shortened light-weight endbell without cable clamp Solder Cup / Pin / Layout: 36A46 | | |
| © All rights reserved. Reproduction or issue to third in any form whenever is only permitted with written authorization of ITT Cannon |  | page 1/1 | revision 929 11. Jun 19 |