


- NOTES:
- MATERIAL:
 - SHIELD: DEEP DRAW STEEL;
 - HOUSING: LCP, UL94V-0, NATURAL (WHITE);
 - TAIL ALIGNER: LCP, UL94V-0, NATURAL (WHITE);
 - CONTACT: COPPER ALLOY;
 - JACKPOST: STEEL.
 - PLATING: SEE SHEET 2.
 - PRODUCT CONFORMS TO MOLEX PRODUCT SPECIFICATION NUMBER PS-74320-001. REFER TO THIS SPECIFICATION FOR SPACING ON A P.C.B. OF TWO OR MORE CONNECTORS WHEN USING A CABLE OR AN ADAPTER ASSEMBLY.
 - SEE SHEET 2 FOR RECOMMENDED PANEL CUT-OUT AND P.C.B. LAYOUT.
 - PARTS WILL BE PACKAGED IN TRAYS PER PK-74320-010.
 - PRODUCT CONFORMS TO DDWG DVI SPECIFICATION. REFER TO THIS SPECIFICATION FOR CONNECTOR MATING DIMENSIONS.
 - RECOMMENDED MOUNTING HARDWARE IS MOLEX P/N 71781-0001 OR 82007-0300 OR 88780-6066. REFER TO PRODUCT SPECIFICATION NUMBER PS-74320-001 FOR THIS APPLICATION TORQUE REQUIREMENT FOR ASSEMBLING MOUNTING HARDWARE.
- △ CAVITY ID AND MANUFACTURING PLANT CODE.

74320-4006	74320-4026	47570-0002
PART NUMBER	CONNECTOR	JACKPOST


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
QUALITY SYMBOLS FA = 0 FE = 0 FB = 0 FV = 0 FC = 0 FX = 0 FS = 0 FT = 0	CHANGE SHELL PLATING EC NO: 118825 DRWN: XQZHANG CHK'D: XQZHANG APPR: AYIN	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 ° 4 PLACES ± 0.1 3 PLACES ± 0.1 2 PLACES ± 0.1 1 PLACE ± 0 PLACES ±		DIMENSION UNITS: INCH SCALE: 1:1									
		DRWN BY: XQZHANG DATE: 2014/12/11		CHK'D BY: XQZHANG DATE: 2014/12/10								DVI-DIGITAL RIGHT ANGLE RECEPTACLE CONNECTOR, WITH JACKPOST	
		APPR BY: AYIN DATE: 2015/02/09		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE: A3 THIRD ANGLE PROJECTION		PRODUCT CUSTOMER DRAWING					
		SERIES: 74320 MATERIAL NUMBER: 74320-4006 CUSTOMER: GENERAL MARKET		DOCUMENT NUMBER: SD-74320-103 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 2									

RELEASE STATUS	RELEASE DATE
----------------	--------------

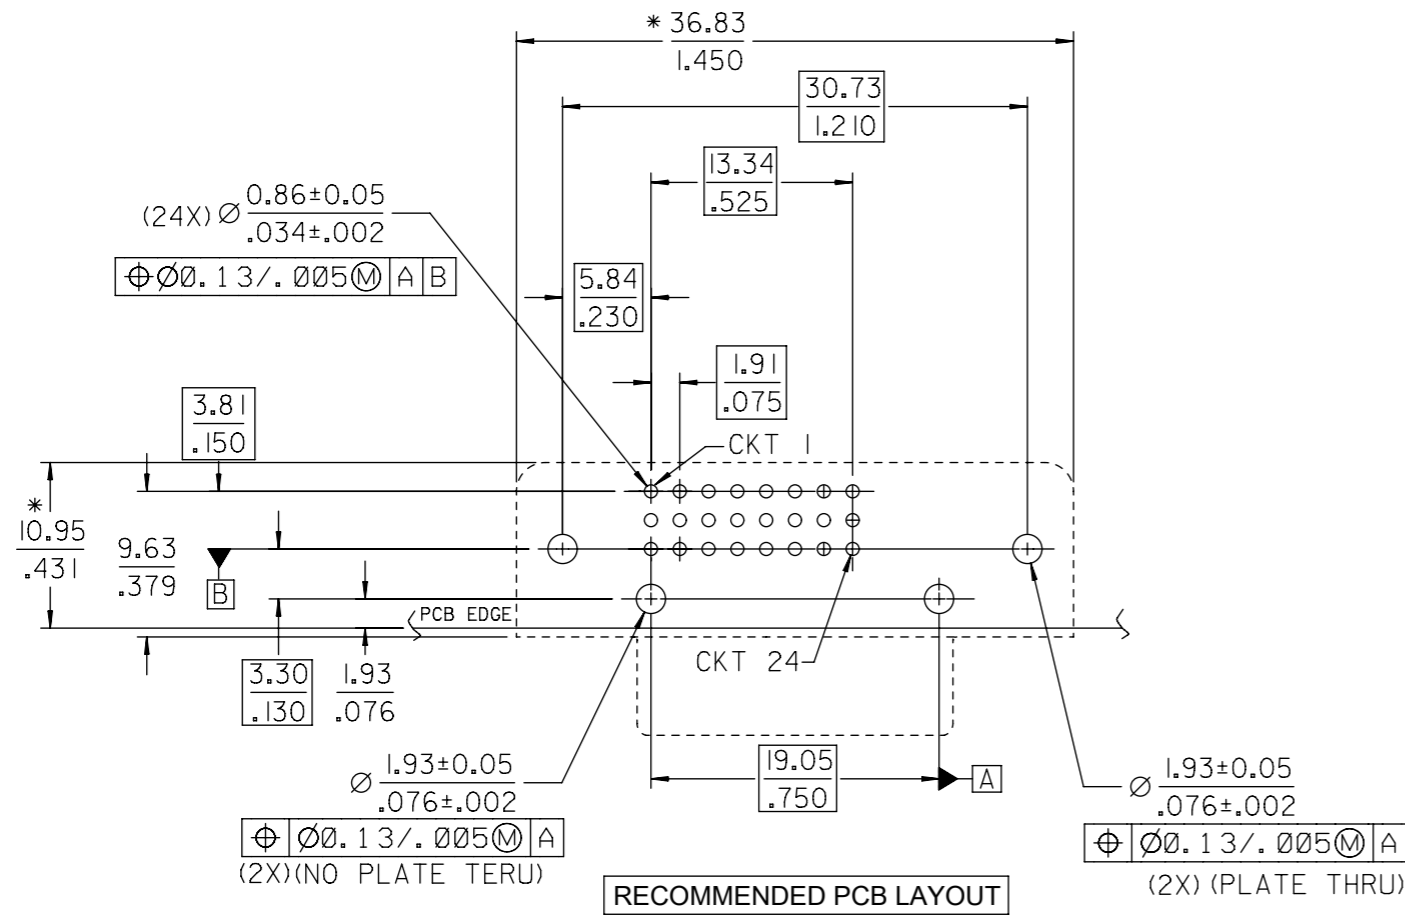

* THESE DIMENSIONS REPRESENT CONNECTOR OVERLAY ON PCB.

PLATING OPTIONS:
 OUT SHIELD -- 60u"/(1.5um) MIN. SOLDERABLE NICKEL OVER
 30u"/(0.75um) MIN. COPPER OVERALL.
 .075"/(1.91mm) CONTACTS -- SELECT GOLD FLASH AND
 100u"/(2.50um) MIN. SELECT PURE TIN
 OVER 50u"/(1.27um) MIN. NICKEL OVERALL.

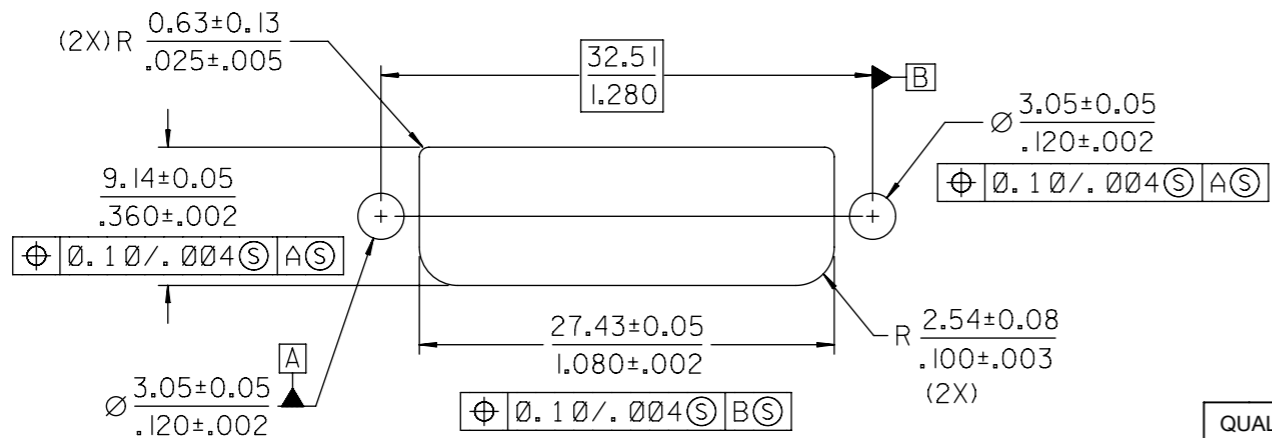

RECOMMENDED PANEL CUT-OUT
 PANEL THICKNESS: .030/0.76-.040/1.02

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
QUALITY SYMBOLS FA = 0 FE = 0 FB = 0 ▼ = 0 C = 0 X = 0 ■ = 0 ▽ = 0	CHANGE SHELL PLATING EC NO: 118825 DRWN: XQZHANG CHK'D: XQZHANG REV APPR: AYIN	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 °		DIMENSION UNITS INCH	SCALE 1:1							
		4 PLACES ± 0.1 3 PLACES ± 0.1 2 PLACES ± 0.1 1 PLACE ± 0 PLACES ±	DRWN BY XQZHANG	DATE 2014/12/11	DVI-DIGITAL RIGHT ANGLE RECEPTACLE CONNECTOR, WITH JACKPOST							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE A3							THIRD ANGLE PROJECTION 	PRODUCT CUSTOMER DRAWING
				APPR BY AYIN	DATE 2015/02/09	SERIES 74320	MATERIAL NUMBER 74320-4006	CUSTOMER GENERAL MARKET				
						DOCUMENT NUMBER SD-74320-103	DOC TYPE PSD	DOC PART 000	SHEET NUMBER 2 OF 2			

RELEASE STATUS	RELEASE DATE
----------------	--------------