

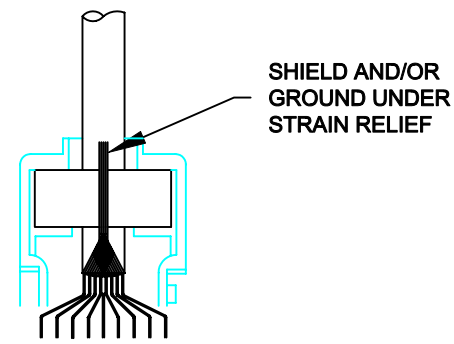



ASSEMBLY INSTRUCTIONS:

1. PREPARE CABLE ENDS, CONNECT TO CONNECTOR
2. INSERT THE LARGE STRAIN RELIEF ONTO THE STRAIN RELIEF AREAS OF EITHER HOOD HALVES, MAKING SURE CABLE JACKET IS BELOW STRAIN RELIEF
3. IF CABLE IS SHIELDED, FOLD SHIELD AND/OR GROUND WIRE BACK UNDER LARGE STRAIN RELIEF BEFORE IT IS PLACED IN THE STRAIN RELIEF AREA. CUT OFF ANY EXCESS WIRE SO IT DOES NOT STICK OUT OF THE CONNECTOR. SHIELD MUST MAKE CONTACT WITH METALIZED PLASTIC HOOD
4. PLACE THE SMALLER STRAIN RELIEF ON TOP OF THE LARGER STRAIN RELIEF. PRESS DOWN ON THE SMALLER STRAIN RELIEF UNTIL IT GRIPS THE CABLE JACKET FIRMLY
5. PLACE THE OTHER HALF OF THE HOOD ON TOP OF THE FIRST HALF, MAKING SURE NO WIRES ARE PINCHED
6. HOLDING THE HOODS TOGETHER, PRESS THE TWO HALVES TOGETHER UNTIL THEY ARE FIRMLY LOCKED IN PLACE

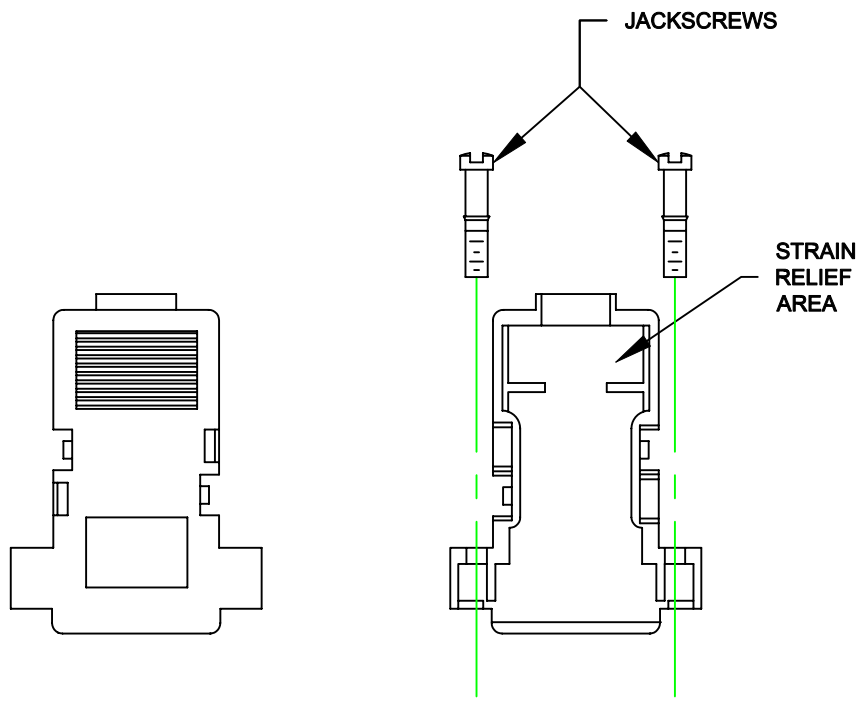

STRAIN RELIEF CLAMP

PLASTIC & METALIZED PLASTIC

| | | | | |
|------------------|---|---------------------------------------|-------------------------------|--------------------------|
| | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | DRAWN: C. SMITH | DATE: 05-09-07 |
| | | | CHECKED: | DATE: |
| <h1>NorComp</h1> | | SCALE: N.T.S. | SHEET 1 OF 1 | REV 0 |
| | | DWG NO. BACKSHELL - 956 SERIES | | |

RoHS COMPLIANT