

STRADA-2X2-T4

IESNA Type IV beam for wider roads and large outdoor area

TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	7.7 mm
Fastening	pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	7.7 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ




MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-2X2-T4	Multi-lens	PMMA	clear


PHOTOMETRIC DATA (MEASURED):




LED XM-L
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.630 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

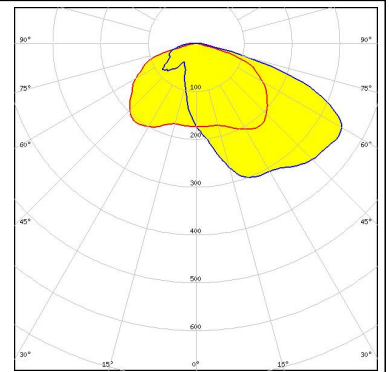



LED XP-G
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

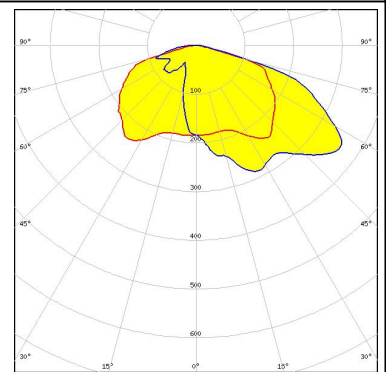

LED XP-G2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.570 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

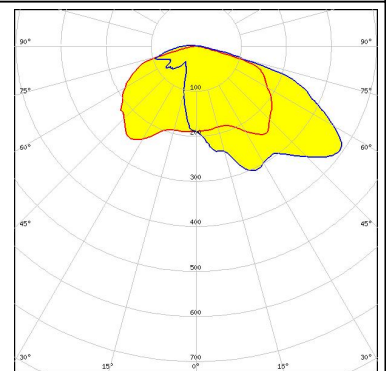


LED XP-G3
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

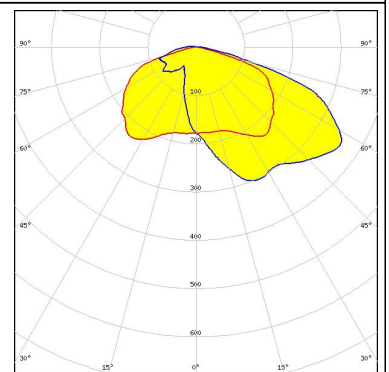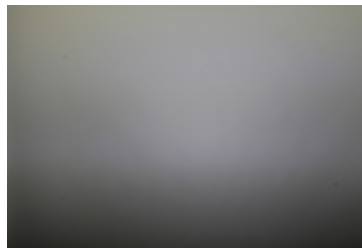

PHOTOMETRIC DATA (MEASURED):


CREE

LED XP-L HD
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.520 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

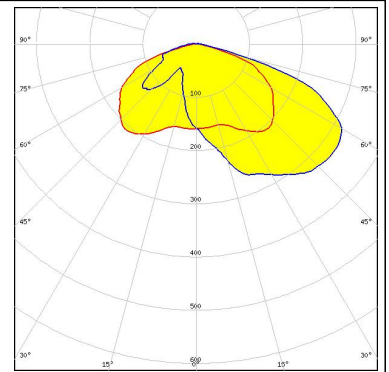


CREE

LED XP-L HI
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.560 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

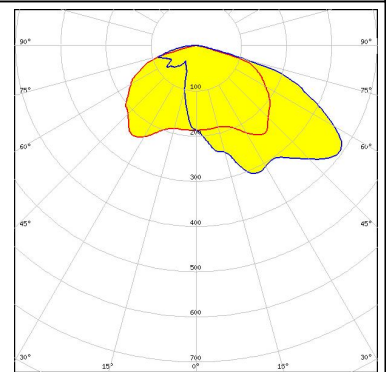


CREE

LED XP-L2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.540 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

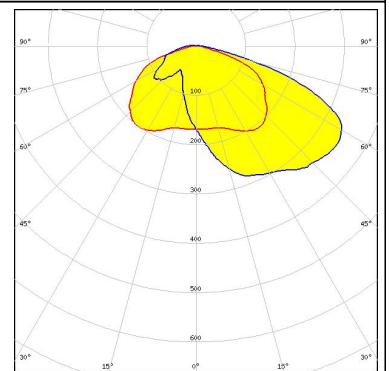

CREE


LED XT-E
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

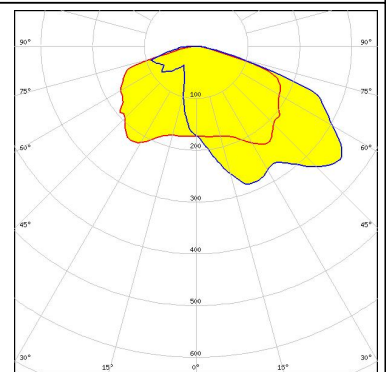

PHOTOMETRIC DATA (MEASURED):


LG Innotek

LED H35C1 (LEMWA33)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

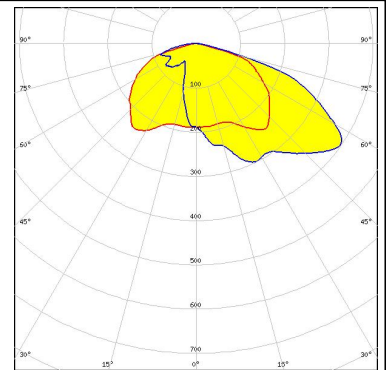


LUMILEDS

LED LUXEON 5050 Round LES
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.510 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

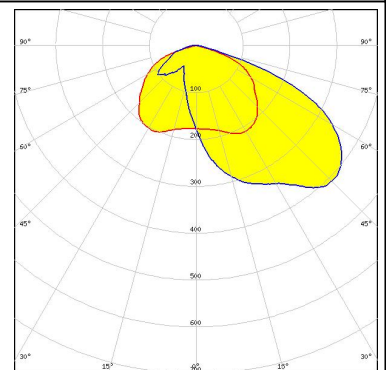


LUMILEDS

LED LUXEON MZ
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.640 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

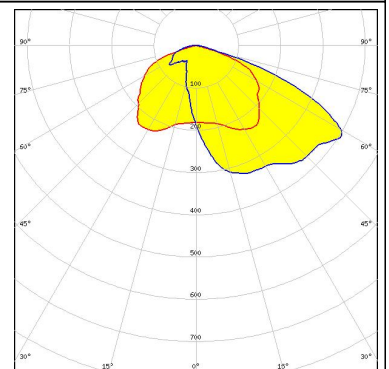

LUMILEDS


LED LUXEON Q
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

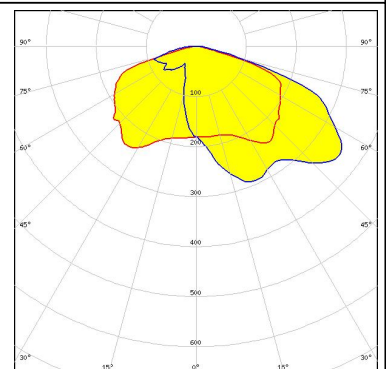

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON T
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

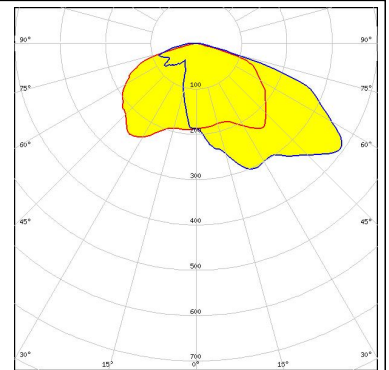


LUMILEDS

LED LUXEON TX
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.590 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

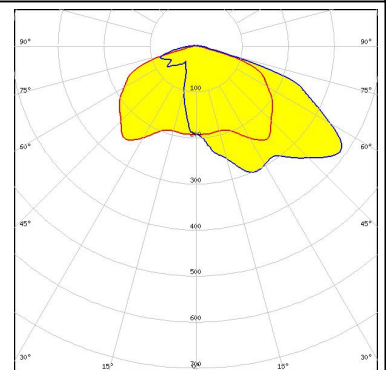


LUMILEDS

LED LUXEON V
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.560 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

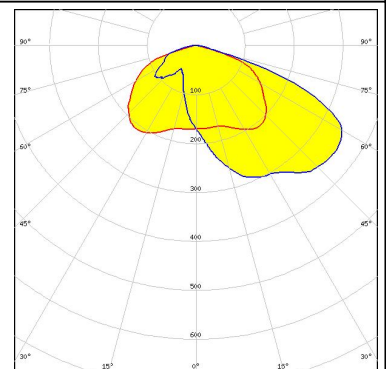

NICHIA


LED NVSW219F
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.580 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

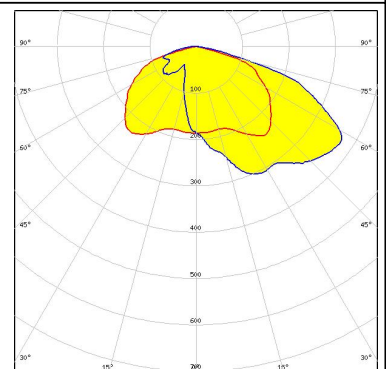


PHOTOMETRIC DATA (MEASURED):




LED NVSW319B
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

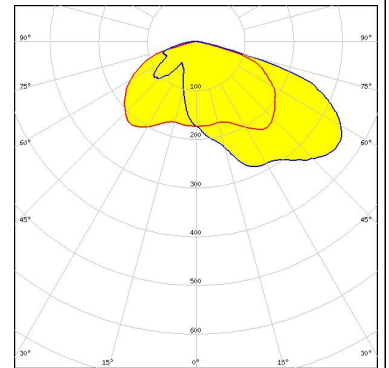


LED NVSW3x9A
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.640 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

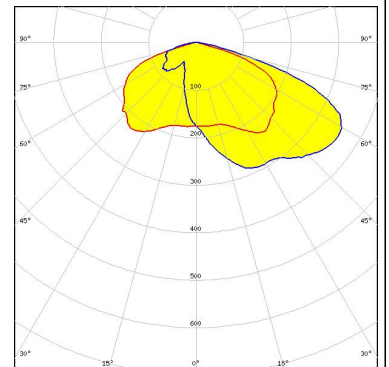

OSRAM Opto Semiconductors
 LED OSOLON Square PC
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

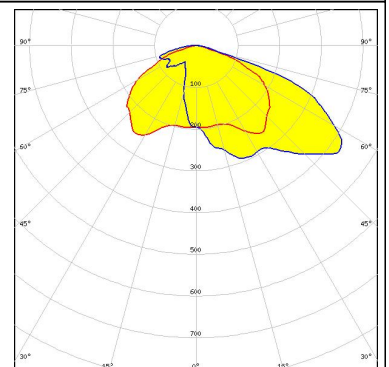


LED Fortimo FastFlex LED 2x8 DA G4
 FWHM Asymmetric
 Efficiency %
 Peak intensity 0.580 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

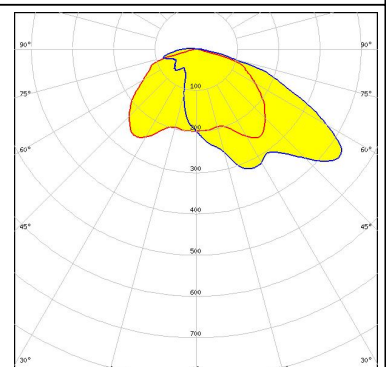

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.523 cd/lm
LEDs/each optic 1
Light colour White
Required components:

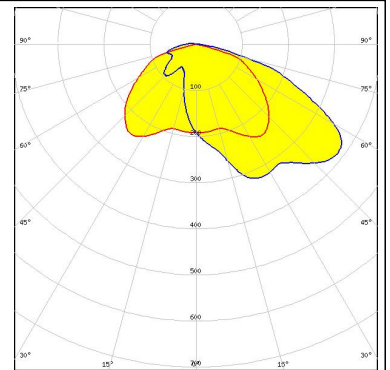


PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

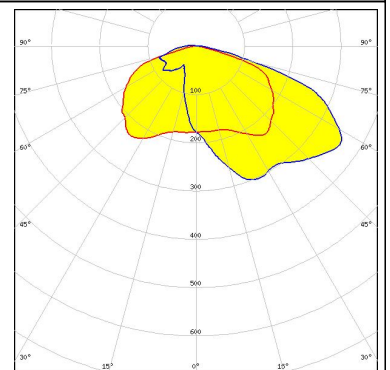


SAMSUNG

LED HiLOM RH16 (LH351C)
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.580 cd/lm
LEDs/each optic 1
Light colour White
Required components:

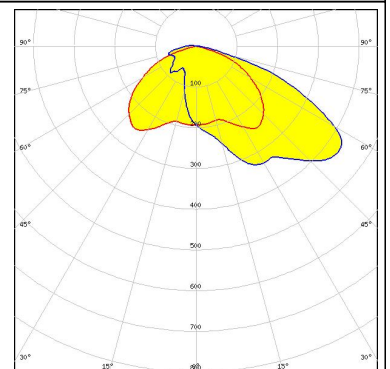

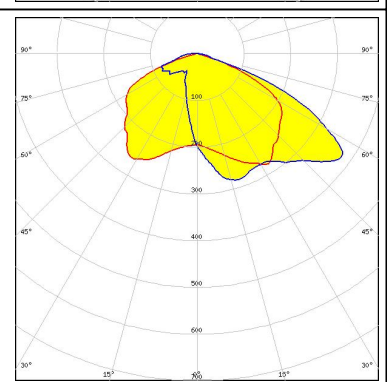
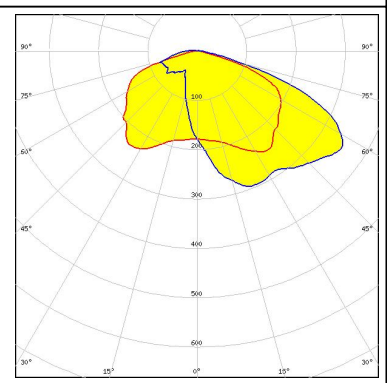
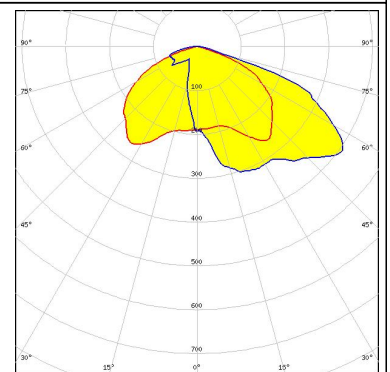


SAMSUNG

LED LH351B
FWHM Asymmetric
Efficiency %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

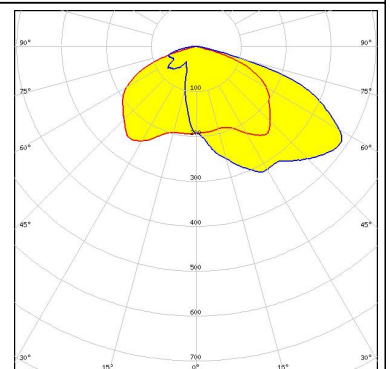

PHOTOMETRIC DATA (MEASURED):
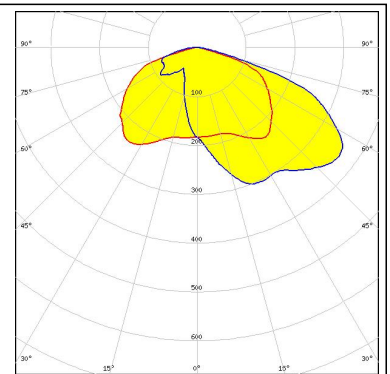
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED Z5M3 FWHM Asymmetric Efficiency 94 % Peak intensity 0.580 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED Z8Y22 FWHM Asymmetric Efficiency 94 % Peak intensity 0.690 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED Z8Y22P FWHM Asymmetric Efficiency 94 % Peak intensity 0.630 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>TOSHIBA Leading Innovation >>></p> <p>LED TL1L4 FWHM Asymmetric Efficiency 91 % Peak intensity 0.590 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		


PHOTOMETRIC DATA (MEASURED):

TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:


TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

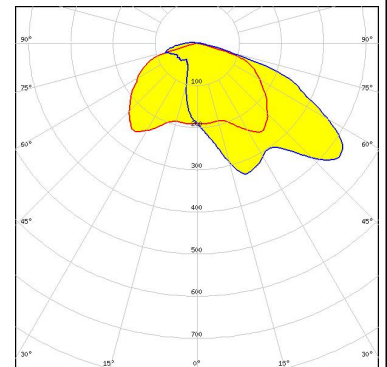


TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

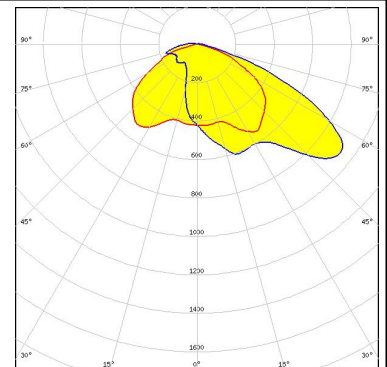

TRIDONIC


LED RLE G1 49x133mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

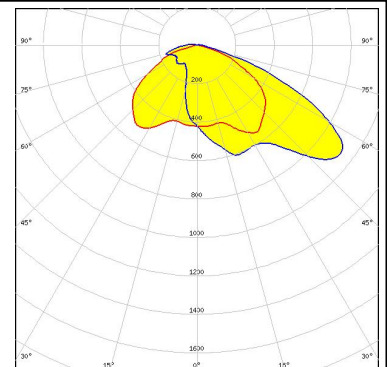

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

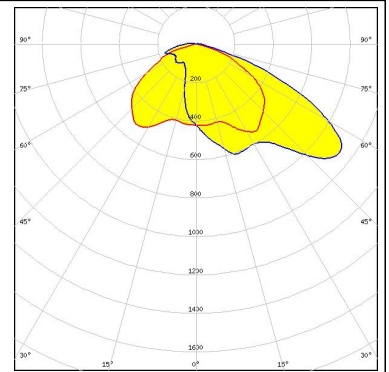

TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

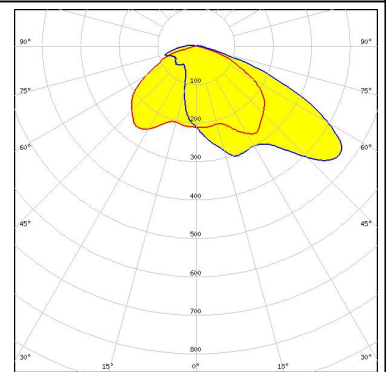

PHOTOMETRIC DATA (SIMULATED):




LED XHP35 HD
FWHM Asymmetric
Efficiency 90 %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:




LED XHP35 HI
FWHM Asymmetric
Efficiency 93 %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED XM-L2
FWHM Asymmetric
Efficiency 94 %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

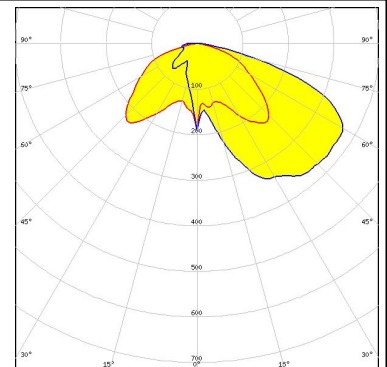


LED XP-G2 HE
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.493 cd/lm
LEDs/each optic 1
Light colour White
Required components:

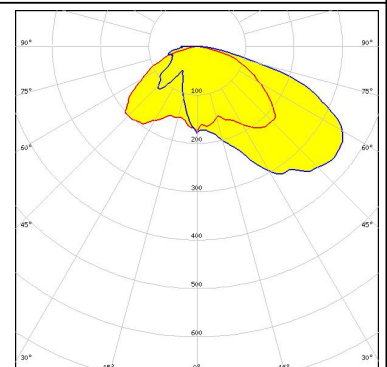

PHOTOMETRIC DATA (SIMULATED):


LUMILEDS

LED LUXEON 3030 2D (Round LES)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.560 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

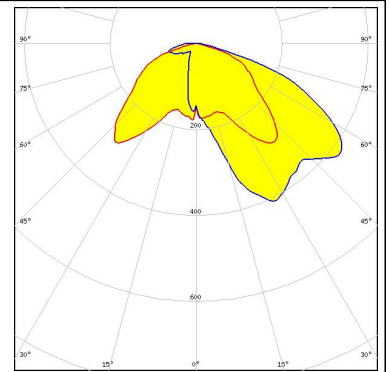

LUMILEDS

LED LUXEON 3030 2D (Square LES)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.550 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

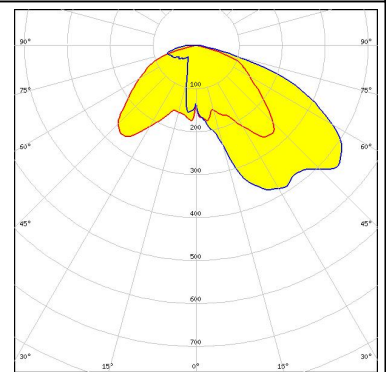


LUMILEDS

LED LUXEON 5050 Round LES
 FWHM Asymmetric
 Efficiency 83 %
 Peak intensity 0.429 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:





Transparent protective cover

LUMILEDS





LED LUXEON V2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.510 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

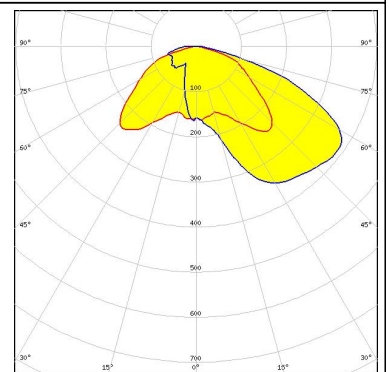


PHOTOMETRIC DATA (SIMULATED):
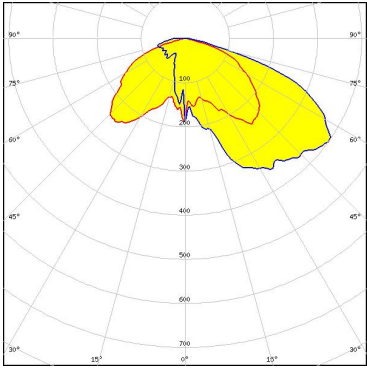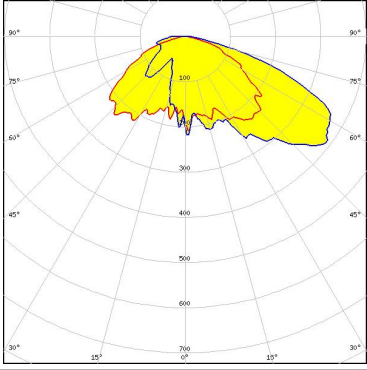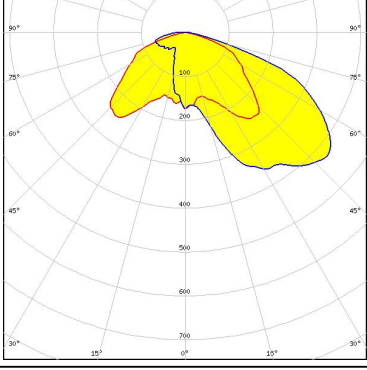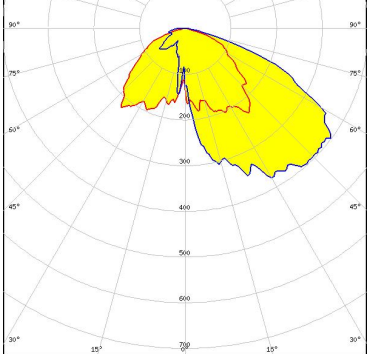
<p>NICHIA</p> <p>LED NVSxx19B/NVSxx19C FWHM Asymmetric Efficiency 94 % Peak intensity 0.603 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM</p> <p>LED PrevaLED Brick HP 2x8 FWHM Asymmetric Efficiency 92 % Peak intensity 0.510 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED Duris S5 (2 chip) FWHM Asymmetric Efficiency 94 % Peak intensity 0.540 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED Duris S8 FWHM Asymmetric Efficiency 93 % Peak intensity 0.498 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):
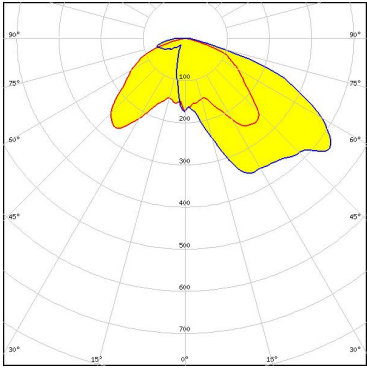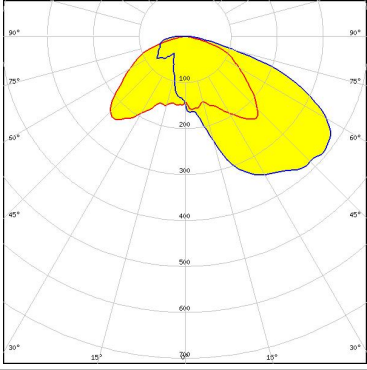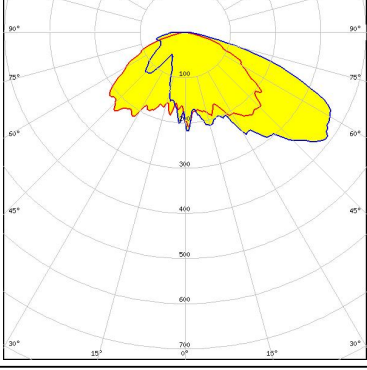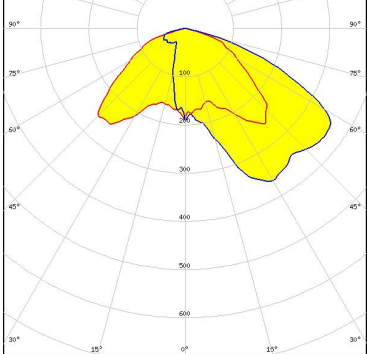
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3737 (2W version)</p> <p>FWHM Asymmetric</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.570 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3737 (3W version)</p> <p>FWHM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.500 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSLON Square CSSRM2/CSSRM3</p> <p>FWHM Asymmetric</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.510 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSLON Square CSSRM2/CSSRM3</p> <p>FWHM Asymmetric</p> <p>Efficiency 82 %</p> <p>Peak intensity 0.450 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p> <p style="background-color: #ADD8E6; padding: 2px;">Transparent protective cover</p>	

PHOTOMETRIC DATA (SIMULATED):

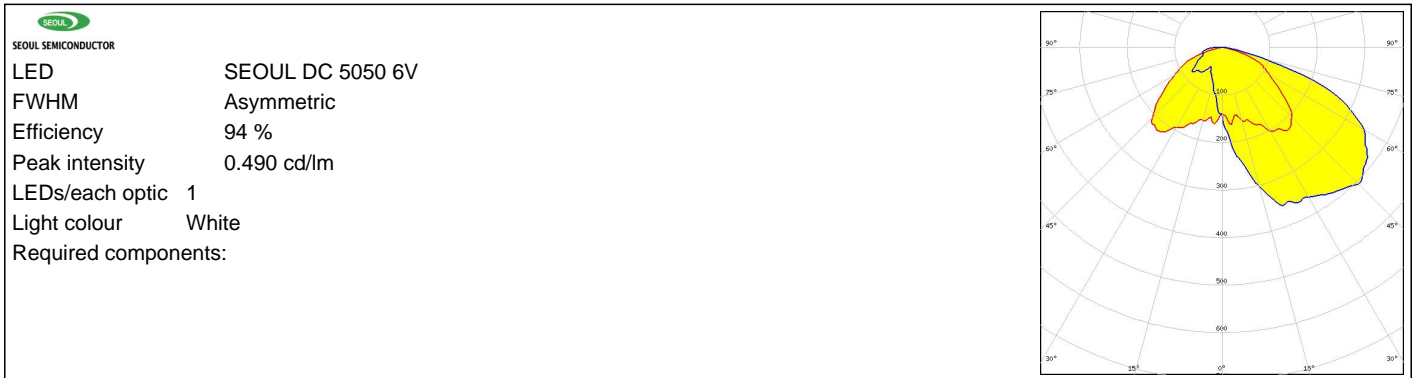

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)