

IloT Product Change Notice


The change will be applied on the ULI-417CI (BB-UHR307). If you need more information or special support, please contact the corresponding PMs/AEs listed in the table below.

Note: The ordering process has not been changed. Customers should continue to order model number BB-UHR307.

- Reason for the Change:** Branding & Compliance Marking.
- Affected Products:** ULI-417CI (BB-UHR307)
- Impact on Application:** No change to form, fit, or function.


Item	Impact
Impact on Mechanical Design	No
Impact on Software Compatibility	No
Impact on Environment Characteristics	No
Impact on System Certifications	Yes -The UL File Number will change from E245458 to E337172.
Physical Outlook Change	Yes
Ordering P/N Change	No
Cut-in Implement	Component Running Change

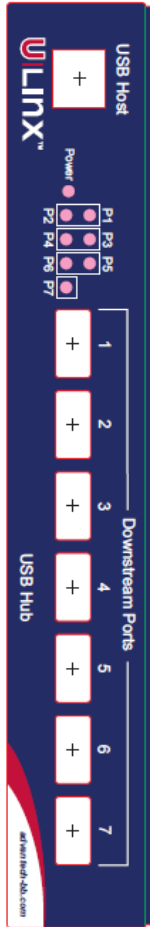

4. Description of the Change(s):

Affected Models	Current Component	New Component	Category	Outlook Difference	Reason
ULI-417CI BB-UHR307	20BB250- 10897-00	1990039373T010	Label	<p>Old name plate</p> 	Branding

New name plate



<p>ULI-417CI BB-UHR307</p>	<p>20BB250-11233-00R2</p>	<p>20BB250-11233-00R3</p>	<p>Label</p>	<p>Old name plate</p> <div style="border: 1px solid black; padding: 10px;"> <p>Power: 12 to 30VDC @ 30 Watts Max. Class 2 Power Source Only</p> <p>B+B SMARTWORX Powered by ADVANTECH www.advantech-bb.com</p> <p>Model: UHR307</p> <p>Description: Isolated Industrial 7 Port USB Hub</p> <table border="1"> <thead> <tr> <th>LED</th> <th>State</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Local Power</td> <td>On</td> <td>Power is applied (the product is capable of supplying 5VDC at 500 mA per downstream port)</td> </tr> <tr> <td>Off</td> <td>Power is not applied</td> </tr> <tr> <td rowspan="2">Port LED's</td> <td>On</td> <td>Port is Active and ready for use</td> </tr> <tr> <td>Off</td> <td>Port has a fault</td> </tr> </tbody> </table> <p>This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference that may cause undesired operation.</p> <ul style="list-style-type: none"> Ambient Temperature: -40 to 80°C See instruction manual for additional information <p>WARNING: DO NOT REMOVE OR REPLACE WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE FREE OF IGNITABLE CONCENTRATIONS OF FLAMMABLE GASES OR VAPORS</p> <div style="display: flex; justify-content: space-between; align-items: flex-end;"> <div style="border: 1px solid black; width: 100px; height: 30px;"></div> <div style="font-size: small;"> <p>Ind. Cont. Eq. For HAZ LOC 3HTV E24548 Class I, Div. 2, Groups A, B, C & D Temp. Code: T4</p> </div> <div style="text-align: center;">  <p>LISTED</p> </div> </div> </div> <p>New name plate</p>	LED	State	Description	Local Power	On	Power is applied (the product is capable of supplying 5VDC at 500 mA per downstream port)	Off	Power is not applied	Port LED's	On	Port is Active and ready for use	Off	Port has a fault	<p>UL File Number and Branding</p>
LED	State	Description																
Local Power	On	Power is applied (the product is capable of supplying 5VDC at 500 mA per downstream port)																
	Off	Power is not applied																
Port LED's	On	Port is Active and ready for use																
	Off	Port has a fault																

				<p>Power: 12 to 30VDC @ 30 Watts Max. Class 2 Power Source Only</p>  <p>www.advantech.com</p> <p>ULI-417CI Model: UHR307</p> <p>Description: 7-Port Industrial USB Hub with Isolation</p> <table border="1" data-bbox="831 669 1281 853"> <thead> <tr> <th>LED</th> <th>State</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Local Power</td> <td>On</td> <td>Power is applied (the product is capable of supplying 5VDC at 500 mA per downstream port)</td> </tr> <tr> <td>Off</td> <td>Power is not applied</td> </tr> <tr> <td rowspan="2">Port LED's</td> <td>On</td> <td>Port is Active and ready for use</td> </tr> <tr> <td>Off</td> <td>Port has a fault</td> </tr> </tbody> </table> <p>This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference that may cause undesired operation.</p> <ul style="list-style-type: none"> Ambient Temperature: -40 to 80°C See instruction manual for additional information <p>WARNING, DO NOT REMOVE OR REPLACE WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE FREE OF IGNITABLE CONCENTRATIONS OF FLAMMABLE GASES OR VAPORS</p> <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="border: 1px solid black; padding: 5px;">R3</div> <div style="text-align: right;"> <p>Ind. Cont. Eq. For HAZ LOC 5DW5 E337172 Class I, Div. 2, Groups A, B, C & D Temp. Code: T4 Factory ID: USH3</p>  </div> </div>	LED	State	Description	Local Power	On	Power is applied (the product is capable of supplying 5VDC at 500 mA per downstream port)	Off	Power is not applied	Port LED's	On	Port is Active and ready for use	Off	Port has a fault
LED	State	Description															
Local Power	On	Power is applied (the product is capable of supplying 5VDC at 500 mA per downstream port)															
	Off	Power is not applied															
Port LED's	On	Port is Active and ready for use															
	Off	Port has a fault															

5. Implementation & Schedule of the Change(s):

Affected Models	ECOM Number	Estimated Effective Date	Cut-in Implement	Change Description
ULI-417CI (BB-UHR307)	ECOM-195128	2/28/2023	Running Change	Update name plate and UL File number

*Note: Cut-in progress depends on factory production schedule.

** Note: The ordering process has not been changed. Customers should continue to order model number BB-UHR307

Contact Windows

PM	Brian Foster / brian.foster@advantech.com
AE	N/A