


C781U472MSWDCAWL50

C700KJN SFTY X1-440 Y1-400, Ceramic, 4700 pF, 20%, 440 VAC (X1), 400 VAC (Y1), Y5U, Lead Spacing = 10mm

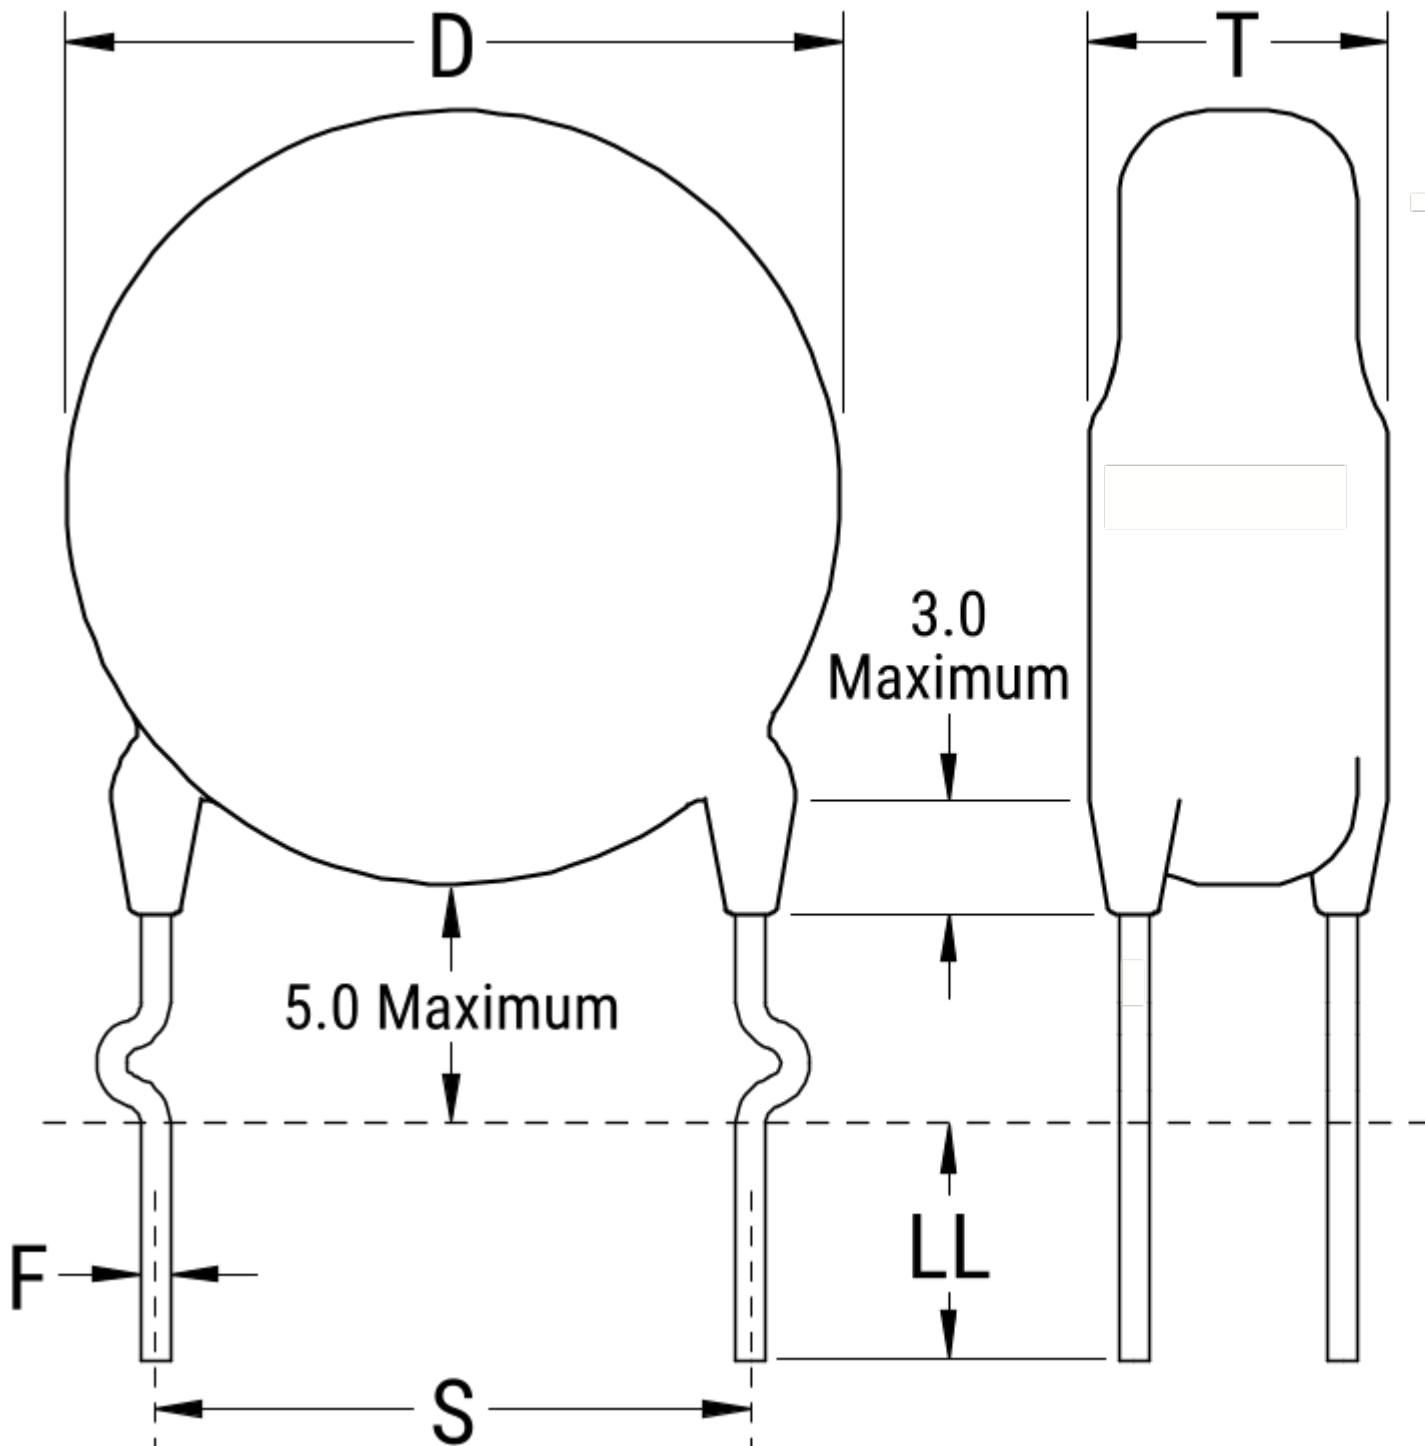

Click [here](#) for the 3D model.

Dimensions

- D 15mm MAX
- T 6mm MAX
- S 10mm MAX
- LL 5mm +/-1mm

Dimensions

F 0.6mm +/-0.1mm

Packaging Specifications

Packaging Bulk, Bag

Packaging Quantity 300

General Information

Series C700KJN SFTY X1-440 Y1-400

Style Radial Disc

RoHS Yes

Termination Tin

Failure Rate N/A

Qualifications UL, CSA, TUV

AEC-Q200 No

Specifications

Capacitance	4700 pF
Capacitance Tolerance	20%
Voltage AC	440 VAC (X1), 400 VAC (Y1)
Temperature Range	-40/+125°C
Temperature Coefficient	Y5U
Dissipation Factor	5% 1 kHz 5.0Vrms
Insulation Resistance	10 GOhms
Safety Class	X1/Y1
Dielectric Withstanding Voltage	4000 VAC

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 09d5c6a7-7253-4a47-8b1a-3a7c1907247b

© 2006 - 2023 KEMET

Generated 5/18/2023 - 09d5c6a7-7253-4a47-8b1a-3a7c1907247b

© 2006 - 2023 KEMET