


COIL: @ 25°C	
RESISTANCE	450 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	13.4 mADC
MUST RELEASE	1.4 mADC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE TIME 15 MS MAX.
	RELEASE TIME 4 MS MAX.
	CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

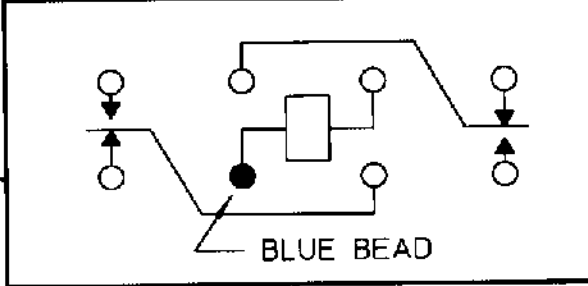

CONTACT RATING:	5A 30 VDC
	3A 115 VAC 400 HZ RESISTIVE
	100,000 OPERATIONS

DR. R.B. 11/19/97 CK 11/19/97



CUST.	HI-G
CUST. NO.	2BCN-1B-112

TYPE SF5A RELAY

SF5A5137S02