



Power contactor, AC-3 7 A, 3 kW / 400 V 1 NC, 24 V DC communication-capable, 3-pole, Size S00, screw terminal

|   |  |
|---|--|
| <b>product brand name</b>   | SIRIUS   |
| <b>product designation</b>  | Power contactor                                      |
| <b>product type designation</b>   | 3RT2   |
| <b>General technical data</b>   |  |
| <b>size of contactor</b>  | S00  |
| <b>product extension</b>  |  |
| <ul style="list-style-type: none"> <li>function module for communication</li> <li>auxiliary switch</li> </ul>   | <p>Yes</p> <p>Yes</p>                                |
| <b>power loss [W] for rated value of the current</b>  |  |
| <ul style="list-style-type: none"> <li>at AC in hot operating state</li> <li>at AC in hot operating state per pole</li> <li>without load current share typical</li> </ul>   | <p>0.6 W</p> <p>0.2 W</p> <p>4 W</p>                 |
| <b>insulation voltage</b>   |  |
| <ul style="list-style-type: none"> <li>of main circuit with degree of pollution 3 rated value</li> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>   | <p>690 V</p> <p>690 V</p>                            |
| <b>surge voltage resistance</b>   |  |
| <ul style="list-style-type: none"> <li>of main circuit rated value</li> <li>of auxiliary circuit rated value</li> </ul>   | <p>6 kV</p> <p>6 kV</p>                              |
| maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1   | 400 V  |
| <b>shock resistance at rectangular impulse</b>  |  |
| <ul style="list-style-type: none"> <li>at DC</li> </ul>   | 6,7g / 5 ms, 4,2g / 10 ms                            |
| <b>shock resistance with sine pulse</b>   |  |
| <ul style="list-style-type: none"> <li>at DC</li> </ul>   | 10,5g / 5 ms, 6,6g / 10 ms                           |
| <b>mechanical service life (switching cycles)</b>   |  |
| <ul style="list-style-type: none"> <li>of contactor typical</li> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> <li>of the contactor with added auxiliary switch block typical</li> </ul> | <p>30 000 000</p> <p>5 000 000</p> <p>10 000 000</p> |
| <b>reference code according to IEC 81346-2</b>  | Q  |
| <b>Substance Prohibitance (Date)</b>  | 10/01/2009   |
| <b>Ambient conditions</b>   |  |
| installation altitude at height above sea level maximum   | 2 000 m  |
| <b>ambient temperature</b>  |  |
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> </ul>  | <p>-25 ... +60 °C</p> <p>-55 ... +80 °C</p>          |
| <b>relative humidity minimum</b>  | 10 %   |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>   | 95 %   |

**Main circuit**

|  |                     |
|--|---------------------|
| <b>number of poles for main current circuit</b>                        | 3                   |
| <b>number of NO contacts for main contacts</b>                         | 3                   |
| <b>operating voltage</b>   |                     |
| • at AC-3 rated value maximum  | 690 V               |
| • at AC-3e rated value maximum   | 690 V               |
| <b>operational current</b>   |                     |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 18 A                |
| • at AC-1  |                     |
| — up to 690 V at ambient temperature 40 °C rated value                 | 18 A                |
| — up to 690 V at ambient temperature 60 °C rated value                 | 16 A                |
| • at AC-3  |                     |
| — at 400 V rated value   | 7 A                 |
| — at 500 V rated value   | 6 A                 |
| — at 690 V rated value   | 4.9 A               |
| • at AC-3e   |                     |
| — at 400 V rated value   | 7 A                 |
| — at 500 V rated value   | 6 A                 |
| — at 690 V rated value   | 4.9 A               |
| • at AC-4 at 400 V rated value   | 6.5 A               |
| • at AC-5a up to 690 V rated value                                     | 15.8 A              |
| • at AC-5b up to 400 V rated value                                     | 5.8 A               |
| • at AC-6a   |                     |
| — up to 230 V for current peak value n=20 rated value                  | 4 A                 |
| — up to 400 V for current peak value n=20 rated value                  | 4 A                 |
| — up to 500 V for current peak value n=20 rated value                  | 3.8 A               |
| — up to 690 V for current peak value n=20 rated value                  | 3.6 A               |
| • at AC-6a   |                     |
| — up to 230 V for current peak value n=30 rated value                  | 2.7 A               |
| — up to 400 V for current peak value n=30 rated value                  | 2.7 A               |
| — up to 500 V for current peak value n=30 rated value                  | 2.5 A               |
| — up to 690 V for current peak value n=30 rated value                  | 2.4 A               |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 2.5 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                     |
| • at 400 V rated value   | 2.6 A               |
| • at 690 V rated value   | 1.8 A               |
| <b>operational current</b>   |                     |
| • <b>at 1 current path at DC-1</b>                                     |                     |
| — at 24 V rated value  | 15 A                |
| — at 110 V rated value   | 1.5 A               |
| — at 220 V rated value   | 0.6 A               |
| — at 440 V rated value   | 0.42 A              |
| — at 600 V rated value   | 0.42 A              |
| • <b>with 2 current paths in series at DC-1</b>                        |                     |
| — at 24 V rated value  | 15 A                |
| — at 110 V rated value   | 8.4 A               |
| — at 220 V rated value   | 1.2 A               |
| — at 440 V rated value   | 0.6 A               |
| — at 600 V rated value   | 0.5 A               |
| • <b>with 3 current paths in series at DC-1</b>                        |                     |

|   |   |
|---|---|
| — at 24 V rated value   | 15 A  |
| — at 110 V rated value  | 15 A  |
| — at 220 V rated value  | 15 A  |
| — at 440 V rated value  | 0.9 A   |
| — at 600 V rated value  | 0.7 A   |
| ● <b>at 1 current path at DC-3 at DC-5</b>                              |   |
| — at 24 V rated value   | 15 A  |
| — at 110 V rated value  | 0.1 A   |
| ● <b>with 2 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 15 A  |
| — at 110 V rated value  | 0.25 A  |
| ● <b>with 3 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 15 A  |
| — at 110 V rated value  | 15 A  |
| — at 220 V rated value  | 1.2 A   |
| — at 440 V rated value  | 0.14 A  |
| — at 600 V rated value  | 0.14 A  |
| <b>operating power</b>  |   |
| ● at AC-3   |   |
| — at 230 V rated value  | 1.5 kW  |
| — at 400 V rated value  | 3 kW  |
| — at 500 V rated value  | 3 kW  |
| — at 690 V rated value  | 4 kW  |
| ● at AC-3e  |   |
| — at 230 V rated value  | 1.5 kW  |
| — at 400 V rated value  | 3 kW  |
| — at 500 V rated value  | 3 kW  |
| — at 690 V rated value  | 4 kW  |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>      |   |
| ● at 400 V rated value  | 1.15 kW   |
| ● at 690 V rated value  | 1.15 kW   |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=20 rated value                   | 1.5 kVA   |
| ● up to 400 V for current peak value n=20 rated value                   | 2.7 kVA   |
| ● up to 500 V for current peak value n=20 rated value                   | 3.3 kVA   |
| ● up to 690 V for current peak value n=20 rated value                   | 4.3 kVA   |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=30 rated value                   | 1 kVA   |
| ● up to 400 V for current peak value n=30 rated value                   | 1.8 kVA   |
| ● up to 500 V for current peak value n=30 rated value                   | 2.2 kVA   |
| ● up to 690 V for current peak value n=30 rated value                   | 2.9 kVA   |
| <b>short-time withstand current in cold operating state up to 40 °C</b> |   |
| ● limited to 1 s switching at zero current maximum                      | 120 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 5 s switching at zero current maximum                      | 86 A; Use minimum cross-section acc. to AC-1 rated value  |
| ● limited to 10 s switching at zero current maximum                     | 67 A; Use minimum cross-section acc. to AC-1 rated value  |
| ● limited to 30 s switching at zero current maximum                     | 52 A; Use minimum cross-section acc. to AC-1 rated value  |
| ● limited to 60 s switching at zero current maximum                     | 43 A; Use minimum cross-section acc. to AC-1 rated value  |
| <b>no-load switching frequency</b>                                      |   |
| ● at DC   | 10 000 1/h  |
| <b>operating frequency</b>  |   |
| ● at AC-1 maximum   | 1 000 1/h   |
| ● at AC-2 maximum   | 750 1/h   |
| ● at AC-3 maximum   | 750 1/h   |
| ● at AC-3e maximum  | 750 1/h   |
| ● at AC-4 maximum   | 250 1/h   |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>                    | DC  |
| <b>control supply voltage at DC</b>                                     |   |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• rated value</li> </ul>   | 24 V   |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b>   |  |
| <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>   | 0.8<br>1.1   |
| <b>closing power of magnet coil at DC</b>   | 4 W  |
| <b>holding power of magnet coil at DC</b>   | 4 W  |
| <b>closing delay</b>  |  |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>   | 30 ... 100 ms  |
| <b>opening delay</b>  |  |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>   | 7 ... 13 ms  |
| <b>arcing time</b>  | 10 ... 15 ms   |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2, optionally via function module   |
| <b>Auxiliary circuit</b>  |  |
| number of NC contacts for auxiliary contacts instantaneous contact  | 1  |
| operational current at AC-12 maximum  | 10 A   |
| <b>operational current at AC-15</b>   |  |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 10 A<br>3 A<br>2 A<br>1 A  |
| <b>operational current at DC-12</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 10 A<br>6 A<br>6 A<br>3 A<br>2 A<br>1 A<br>0.15 A  |
| <b>operational current at DC-13</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 10 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.1 A   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)  |
| <b>UL/CSA ratings</b>   |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 4.8 A<br>6.1 A   |
| <b>yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 0.25 hp<br>0.75 hp<br>1.5 hp<br>2 hp<br>3 hp<br>5 hp   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600  |
| <b>Short-circuit protection</b>   |  |
| <b>design of the fuse link</b>  |  |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>   | gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)<br>gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V, 80kA)<br>gG: 10 A (500 V, 1 kA) |

**Installation/ mounting/ dimensions**

|   |  |
|---|--|
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715   |
| <ul style="list-style-type: none"> <li>• side-by-side mounting</li> </ul>   | Yes  |
| <b>height</b>   | 58 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 73 mm  |
| <b>required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm                        |

**Connections/ Terminals**

|  |  |
|--|--|
| <b>type of electrical connection</b>   |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>   | screw-type terminals<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals   |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main contacts</li> </ul> | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 2x 12 |
| <b>connectable conductor cross-section for main contacts</b>   |  |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> </ul>  | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>  |
| <b>connectable conductor cross-section for auxiliary contacts</b>  |  |
| <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>  | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for auxiliary contacts</li> </ul>        | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 2x 12  |
| <b>AWG number as coded connectable conductor cross section</b>   |  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>  | 20 ... 12<br>20 ... 12   |

**Safety related data**

|  |           |
|--|-----------|
| <b>product function</b>  |           |
| <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> </ul>  | Yes       |
| B10 value with high demand rate according to SN 31920  | 1 000 000 |
| <b>proportion of dangerous failures</b>  |           |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> </ul> | 40 %      |

|   |  |
|---|--|
| • with high demand rate according to SN 31920                           | 73 %   |
| failure rate [FIT] with low demand rate according to SN 31920           | 100 FIT  |
| T1 value for proof test interval or service life according to IEC 61508 | 20 y   |
| protection class IP on the front according to IEC 60529                 | IP20   |
| touch protection on the front according to IEC 60529                    | finger-safe, for vertical contact from the front |
| suitability for use   |  |
| • safety-related switching OFF  | Yes  |

**Certificates/ approvals**  
**General Product Approval**



[Confirmation](#)



[KC](#)



|     |                                       |                           |                   |
|-----|---------------------------------------|---------------------------|-------------------|
| EMC | Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates |
|-----|---------------------------------------|---------------------------|-------------------|



[Type Examination Certificate](#)



EG-Konf.

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

**Marine / Shipping**



|                   |       |         |                |
|-------------------|-------|---------|----------------|
| Marine / Shipping | other | Railway | Dangerous Good |
|-------------------|-------|---------|----------------|



[Confirmation](#)



[Vibration and Shock](#)

[Transport Information](#)

**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2015-1BB42-0CC0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2015-1BB42-0CC0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1BB42-0CC0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2015-1BB42-0CC0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2015-1BB42-0CC0&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1BB42-0CC0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2015-1BB42-0CC0&objecttype=14&gridview=view1>

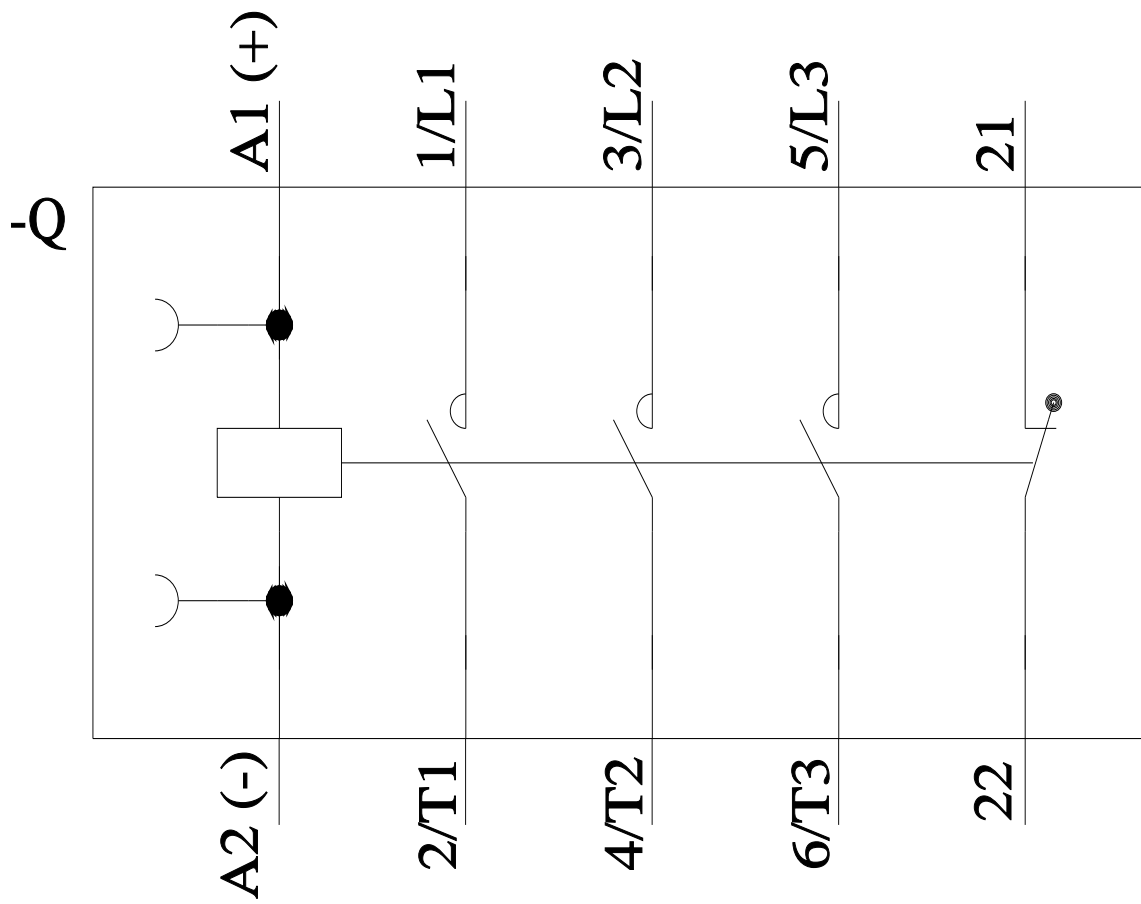

last modified:

6/2/2022 