

Data sheet | Item number: 756-5404/050-010

Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 5-pole;




Length: 1 m



[www.wago.com/756-5404/050-010](http://www.wago.com/756-5404/050-010)



 Picture differs from the item.

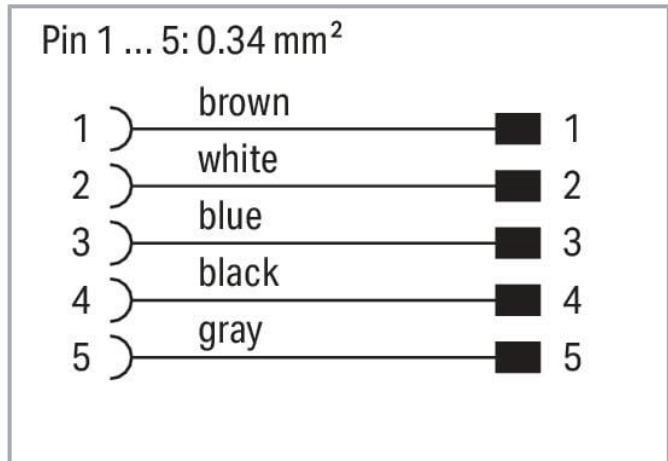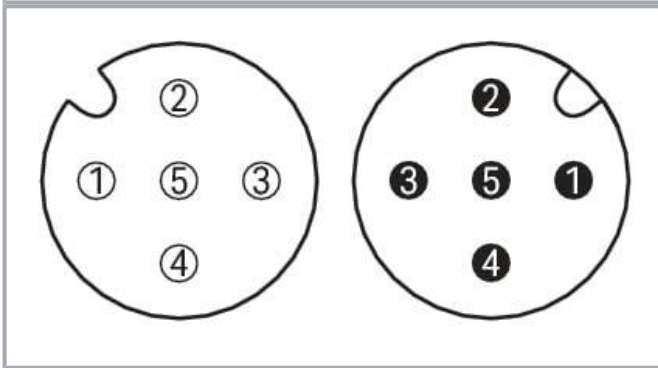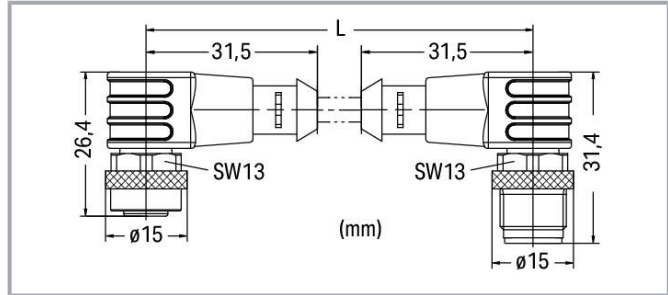

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Data

### Technical data

#### General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

#### Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

#### Cable

Cable length	1 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.8 ... 5.2 mm

#### Connector

Connection type	M12 Socket - M12 plug
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °

Subject to changes. Please also observe the further product documentation!



Connector interface coding (cable/adapter) 1 1	A-coded
Connector interface coding (cable/adapter) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

### Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	HU
GTIN	4044918975674
Customs tariff number	85444290900

### Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	ff987b7f-6fb7-465a-b594-8b1239ebe86f
SCIP notification number (Belgium)	656dd5af-e4ec-4660-9280-5d7da8038d52
SCIP notification number (Bulgaria)	204e4733-b8df-43cd-a1f2-66b334ff3ab5
SCIP notification number (Czech Republic)	80bf005a-97fb-418f-82b5-ff0289321cfd
SCIP notification number (Denmark)	6f9ca49c-10c8-4542-a555-8c443a596784
SCIP notification number (Finland)	27f0e2e2-da5a-4a47-bbb8-57b9468ca2c3
SCIP notification number (France)	35b30ea3-6b00-490c-8818-4ac14ffba264
SCIP notification number (Germany)	55be6bac-6138-43cc-a4d6-3d58918bc2a2
SCIP notification number (Hungary)	fa62df72-1954-4868-8408-7cb565c666fb
SCIP notification number (Italy)	c3131a4f-0cad-4376-8a6d-0dd45ab495d4
SCIP notification number (Netherlands)	6400829c-cde0-4aba-af25-eb355ca901e7
SCIP notification number (Poland)	d81d4e26-36fd-42e6-aa6a-b82022cb075c
SCIP notification number (Romania)	8bf5acff-986f-4b00-b159-280579a5e2fe
SCIP notification number (Sweden)	26056ae9-4512-49a0-adf1-bd1f26cf5c3f


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

## Downloads

### Documentation

#### Bid Text

756-5404/050-010 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5404/050-010 doc - Datei	2017 Sep 20	doc 27.6 kB	Download

### System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

## CAD/CAE-Data

### CAE data

WSCAD Universe 756-5404/050-010	URL	Download
WSCAD Universe 756-5404/050-010	URL	Download

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 756-5404/050-010 Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 5-pole; Length: 1 m	URL	Download
---	-----	----------

Subject to changes. Please also observe the further product documentation!



## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.