


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
4. Package in Bulk per PO

This document is the property of Conduct RF. The information contained herein is not to be disclosed or copied in whole or in part without the written consent of Conduct RF.

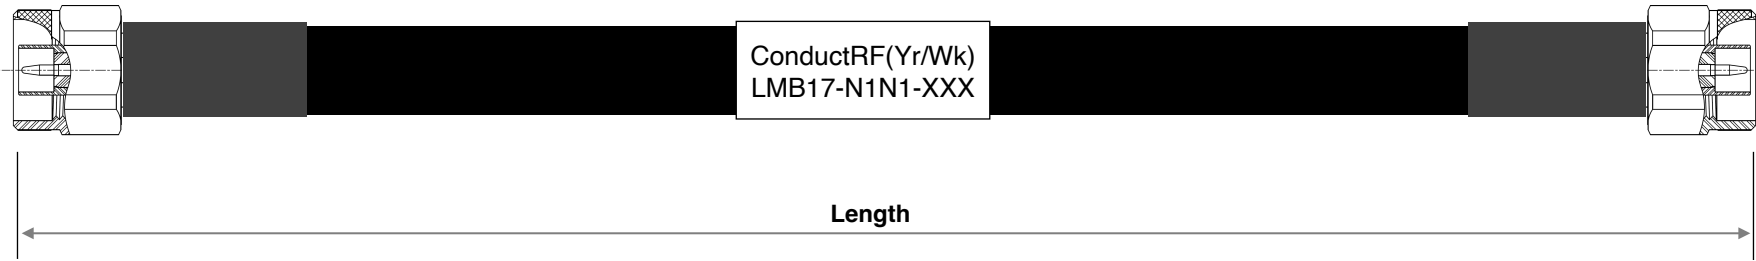


		Insertion Loss (dB) Ref
L	XXX	2GHz
24"	S24	0.28
36"	S36	0.36
48"	S48	0.44
60"	S60	0.52
72"	S72	0.60
10ft	F10	0.91
VSWR	1.35:1(MAX)/Typ. <1.30:1	

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

5	Strain Relief	FT.	As Needed	Shrink Tube	Black
4	Marker	FT.	As Needed	Shrink Tube	White
3	Coax Cable	FT.	As Needed	LMR-400UF	Black TPE
2	Type-N Plug	EA.	1	N5M15F-A17W01	Tri-Metal
1	Type-N Plug	EA.	1	N5M15F-A17W01	Tri-Metal
ITEM	DESCRIPTION	UOM	QTY	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: LMR400UF Type-N Male - Male				
2	Updated Data Table		DG	06/08/22	Remarks: 04/04/10	Date: 04/26/18	Contact: Sales@ConductRF.com Tel: +1 978 374 6840	Range: LMR	Sheet 1 of 1	
1	Release		DG	04/26/18				Dwg Ref: LMB17-N1N1		
					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 2	Part No: LMB17-N1N1-XXX	
REVISION HISTORY										