

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 9 1929

SWITCH-BASIC

CATALOG LISTING


YA-2RB18-A21

YA-2RB18-A21
PAGE 1 OF 1
RELEASE NO. PR-9396
REPLACES X71600-YA

M
DRAWING NUMBER
ISSUE 8


REVISONS	CHECK
A C064626 J A P 16 JUN 89	
B C066550 J A P 8 JAN 90	
C CO-75287-J J A L 22 NOV 93	
D CO-77588 K D R 29 MAR 94	
E CO-78846 DLT 17 NOV 94	
F C093346 DLT 27 AUG 98	
G 0000624 J A H 23 JUN 03	

FO-52848-A
DRAWN
R J H 30 SEP 80
CHECK
S J H 1 OCT 80

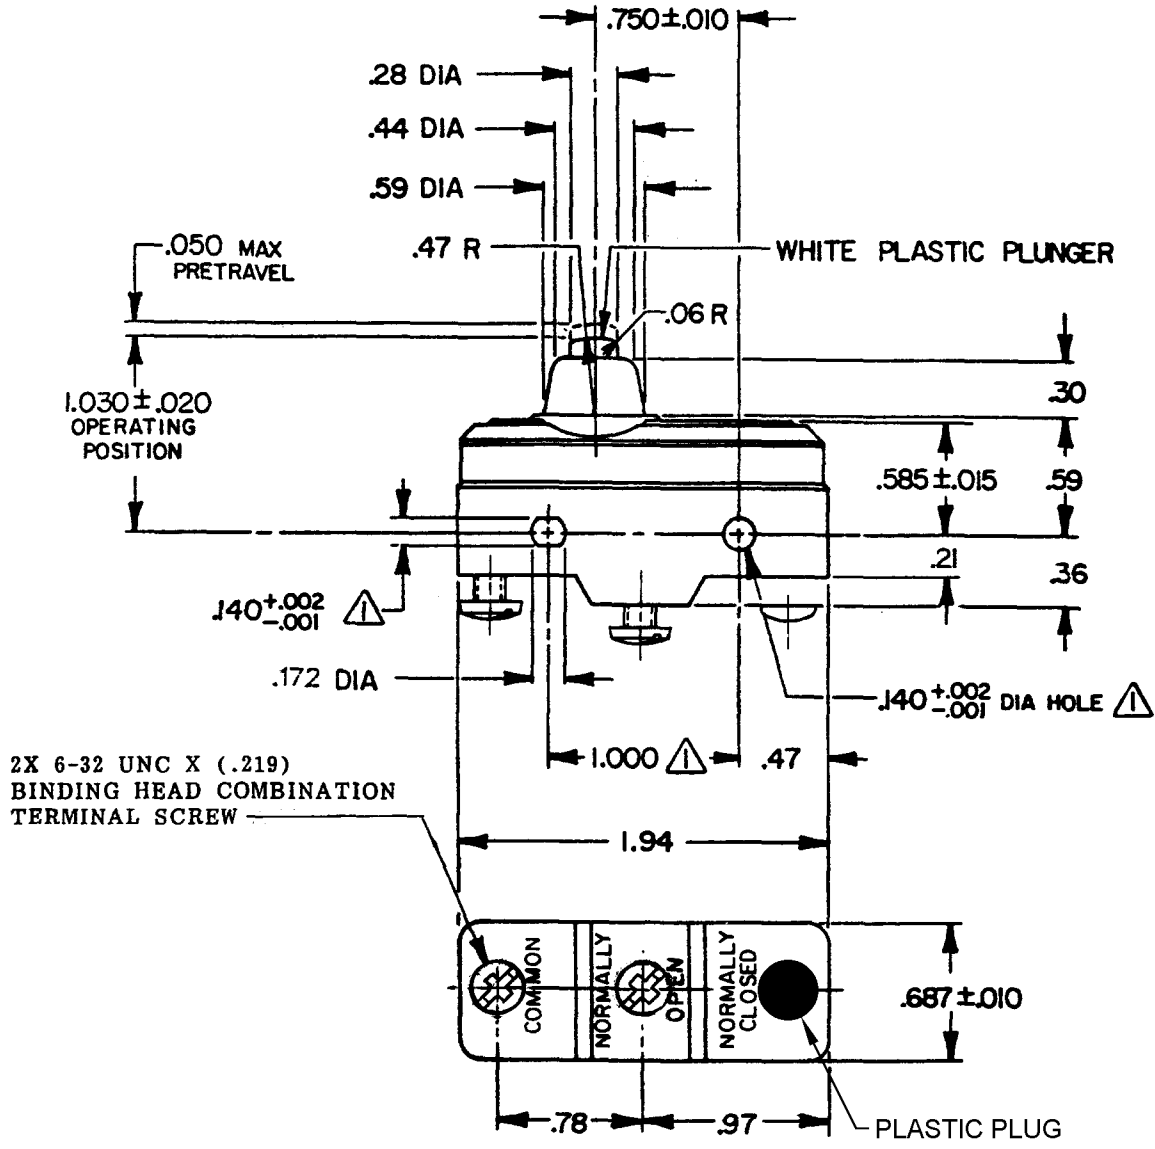

NOTES
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	
OPERATING FORCE	----- 14-22 OZ
RELEASE FORCE	----- 10 OZ MIN
DIFFERENTIAL TRAVEL	---.002 .0075
OVERTRAVEL	----- .094 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P N O	
L23	20A 125, 250, OR 480 VAC 10A 125 VAC "L" 1 HP 125 VAC, 2 HP 250 VAC 1/2 A 125 VDC, 1/4 A 250 VDC
L288 L299 L308	CE Ⓟ A Ⓟ 20(3)A 250V ~ T85 5E4

SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2			
	DIM. mm	TOL. mm/in	DIM. in
NO PLACES	±	1/100	± .001
ONE PLACE	±	0.4/016	± .01
TWO PLACES	±, XX	0.14/006	± .002
THREE PLACES	±, XXX	0.004/002	± .0005
ANGLES			
DESIGN UNITS	<input type="checkbox"/> METRIC <input checked="" type="checkbox"/> US CUSTOMARY		
WEIGHT	.064 LB		