

SUPER LOW NOISE PHEMT (0.15 μ m x 150 μ m)

The BeRex BCL015-70 is a GaAs Super Low Noise Enhancement Mode pHEMT in an industry standard, 70 mil. ceramic, Micro-X, low parasitic, surface-mountable package. It's 0.15 μ m by 150 μ m recessed gate architecture provides low noise and high associated gain over a broad frequency range of 1000 MHz to 26 GHz.

Product Features

- 70 mil. surface-mountable ceramic package
- 0.46 dB typical noise figure @12 GHz
- 11.5 dB typical associated gain @12 GHz
- 0.15 X 150 Micron Recessed Gate
- RoHS2-compliant/lead-free
- Single Positive Voltage Operation



Applications

- Commercial
- Military / Hi-Rel.
- Test & Measurement

Electrical Characteristics (Ta = 25 °C)

SYMBOLS	PARAMETER/TEST CONDITIONS	TEST FREQUENCY	MIN.	TYPICAL	Max	UNIT
NF	Noise Figure (Vds = 2V, Ids = 10mA)	12 GHz		0.46	0.60	dB
G _A	Associated Gain (Vds = 2V, Ids = 10mA)	12 GHz	10.0	11.5		dB
P1dB	Output Power @ p1dB (Vds = 2V, Ids = 10mA)	12 GHz	12	14		dBm
I _{dss}	Saturated Drain Current (Vgs = 0V, Vds = 2V)		0.15	0.25	40	uA
I _{dmax}	Maximum Drain Current (Vds = 2V)			85		mA
G _m	Transconductance			130		mS
V _p	Pinch-off Voltage (I _{ds} = 0.015mA, V _{ds} = 2V)		0.1	0.3	0.5	V
BV _{gd}	Drain Breakdown Voltage (I _g = 0.015mA, source open)			10		V
BV _{gs}	Source Breakdown Voltage (I _g = 0.015mA, drain open)			7		V
R _{th}	Thermal Resistance			280		°C/W

MAXIMUM RATING (Ta = 25 °C)

SYMBOLS	PARAMETERS	ABSOLUTE
Vds	Drain-Source Voltage	5 V
Vgs	Gate-Source Voltage	3 V
Ids	Drain Current	I _{max}
Igsf	Forward Gate Current	20 mA
Pin	Input Power	20 dBm
Tch	Channel Temperature	150 °C
Tstg	Storage Temperature	-60 °C to 150 °C
Pt	Total Power Dissipation	200 mW

Exceeding any of the above Maximum Ratings will result in reduced MTTF and may cause permanent damage to the device.


S-PARAMETERS (Vds = 2V, Ids = 10mA)

Freq. [GHz]	S11 [MAG]	S11 [Ang.]	S21 [MAG]	S21 [Ang.]	S12 [MAG]	S12 [Ang.]	S22 [MAG]	S22 [Ang.]
2	0.93	-47.62	7.66	137.36	0.043	57.40	0.71	-34.87
3	0.87	-68.07	7.02	118.99	0.058	44.03	0.67	-48.98
4	0.80	-86.32	6.39	102.37	0.070	32.47	0.63	-60.96
5	0.74	-102.83	5.85	87.31	0.079	22.49	0.59	-71.07
6	0.69	-118.90	5.41	72.87	0.087	13.12	0.56	-80.37
7	0.63	-134.75	5.06	59.05	0.093	4.36	0.53	-89.03
8	0.58	-150.85	4.75	45.55	0.099	-4.19	0.49	-97.46
9	0.53	-167.56	4.51	32.31	0.104	-12.59	0.45	-105.81
10	0.49	174.67	4.30	19.02	0.108	-21.16	0.42	-114.26
11	0.46	155.53	4.12	5.66	0.112	-29.83	0.38	-122.96
12	0.43	135.46	3.97	-7.81	0.115	-38.37	0.34	-131.88
13	0.42	113.87	3.82	-21.55	0.118	-47.34	0.31	-141.70
14	0.41	90.84	3.69	-35.48	0.120	-57.15	0.26	-151.00
15	0.44	67.16	3.57	-50.31	0.122	-67.14	0.22	-162.80
16	0.48	43.83	3.41	-65.68	0.122	-77.91	0.15	-177.83
17	0.54	22.14	3.22	-81.39	0.121	-89.51	0.08	155.13
18	0.62	2.73	3.00	-97.14	0.118	-101.86	0.05	50.70
19	0.69	-13.86	2.76	-112.64	0.112	-113.98	0.13	3.65
20	0.75	-28.08	2.50	-127.35	0.104	-126.06	0.22	-12.56
21	0.80	-40.29	2.25	-141.28	0.096	-137.43	0.30	-23.31
22	0.84	-51.06	2.04	-154.64	0.089	-148.71	0.37	-32.36
23	0.86	-61.17	1.86	-167.73	0.082	-160.03	0.43	-40.47
24	0.87	-70.85	1.70	179.11	0.077	-172.18	0.48	-47.77
25	0.87	-79.95	1.56	166.48	0.071	175.58	0.52	-54.92
26	0.87	-89.42	1.44	153.35	0.067	162.04	0.56	-62.36


NOISE PARAMETERS (Vds = 2 V, Ids = 10 mA)

Freq. [GHz]	NF min. [dB]	Gamma opt. [Mag.]	Gamma opt. [Ang.]	Normalized Rn	Associated gain [dB]
2	0.10	0.898	27.43	0.17	19.76
3	0.07	0.847	38.46	0.15	17.77
4	0.09	0.801	50.10	0.14	16.80
5	0.14	0.756	61.84	0.12	15.29
6	0.18	0.712	75.99	0.11	14.62
7	0.23	0.668	85.12	0.09	13.98
8	0.27	0.622	96.20	0.08	13.32
9	0.32	0.572	106.73	0.07	12.64
10	0.36	0.518	116.80	0.05	12.34
11	0.41	0.457	129.41	0.05	11.93
12	0.56	0.401	143.48	0.04	11.69
13	0.50	0.335	159.77	0.03	11.44
14	0.55	0.249	173.14	0.04	11.23
15	0.59	0.168	-168.05	0.05	10.91
16	0.64	0.098	-137.43	0.06	10.66
17	0.68	0.082	-63.09	0.09	10.39
18	0.73	0.176	-7.02	0.14	10.43
19	0.77	0.276	12.86	0.18	10.37
20	0.82	0.366	24.59	0.21	10.26
21	0.86	0.446	36.44	0.24	10.15
22	0.91	0.515	45.12	0.28	10.04
23	0.95	0.574	52.07	0.34	9.98
24	1.00	0.622	62.04	0.39	9.82
25	1.04	0.660	69.32	0.41	9.68
26	1.09	0.688	77.53	0.41	9.57


ASSOCIATED GAIN / NOISE FIGURE (Vds = 2V, Ids = 10mA)

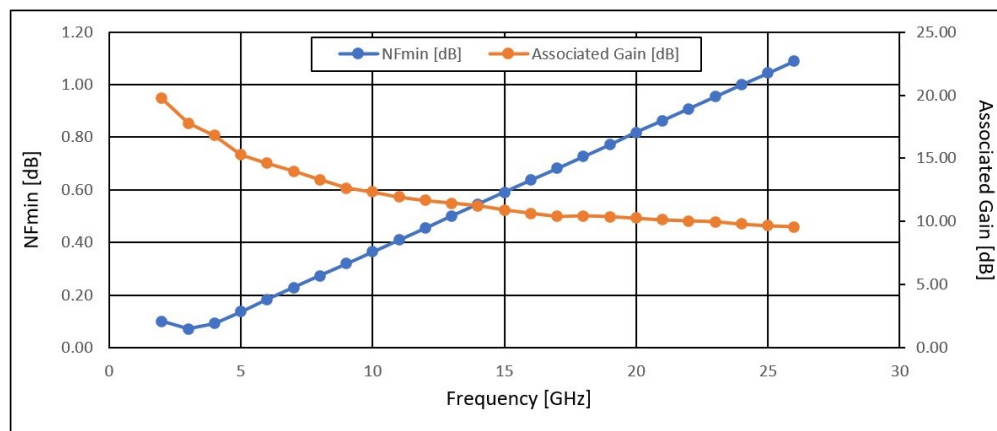


PIN_POUT / Gain (@ 12 GHz, Vds = 2V, Ids = 10mA)

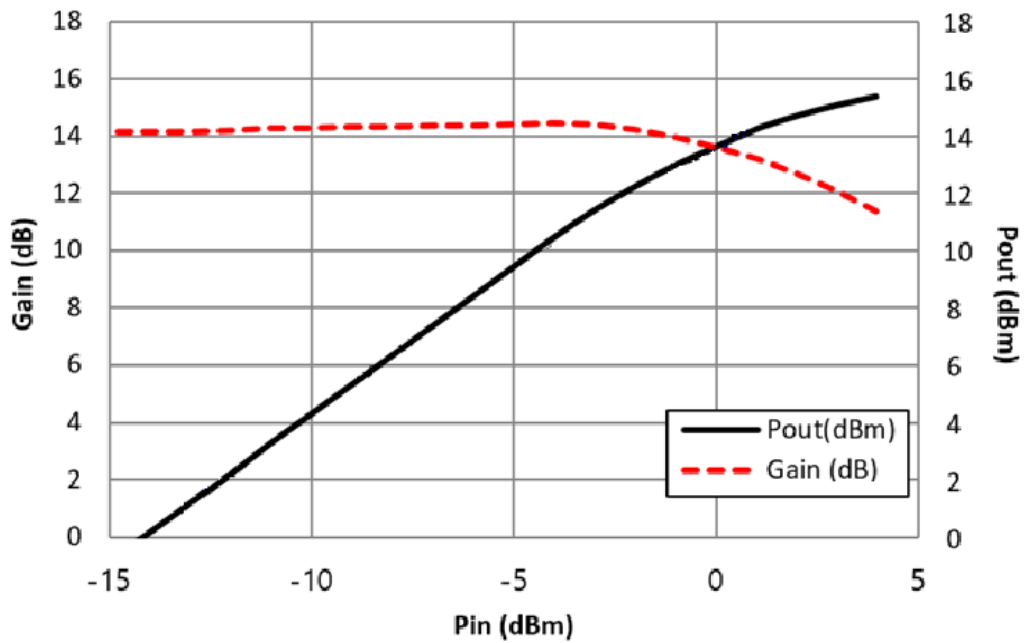



Package Outline Dimension

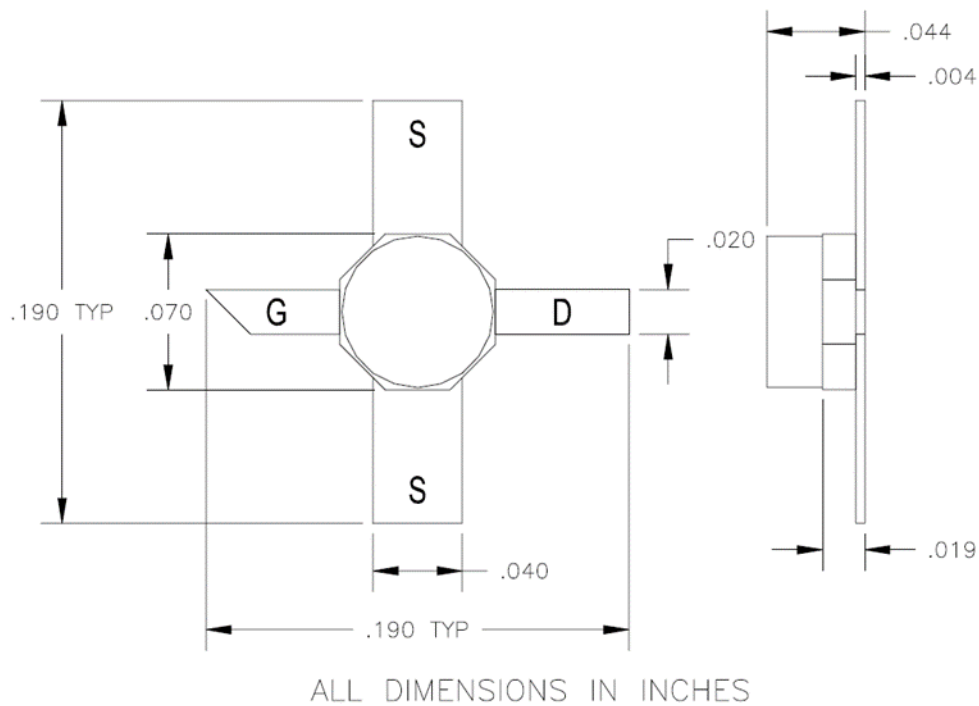

Tape and Reel Dimensions

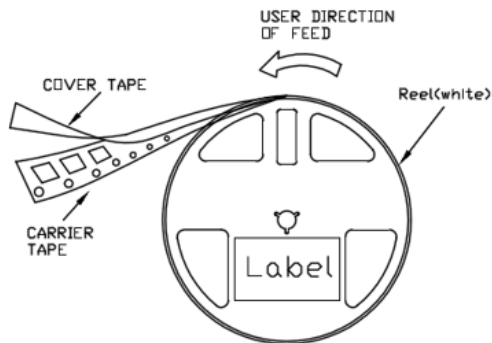

PKG TYPE	Tape Width (mm)	Reel Size	Devices Per Reel
Ceramic 70mils	12	7"	1000

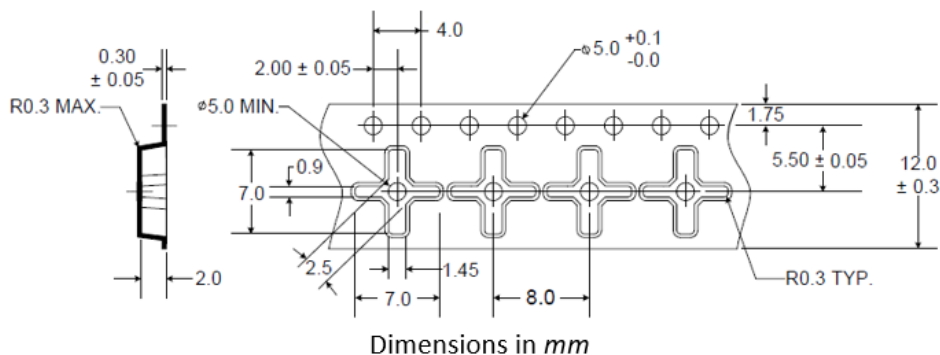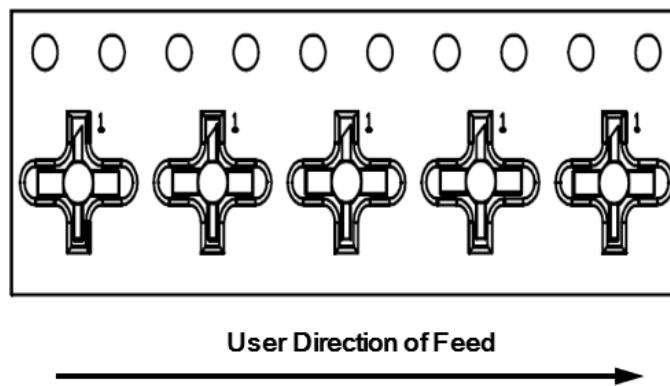

DISCLAIMER

BEREX RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. BEREX DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

BEREX PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES WITHOUT THE EXPRESS WRITTEN APPROVAL OF BEREX.

1. Life support devices or systems are devices or systems which (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Proper ESD procedures should be followed when handling this device.