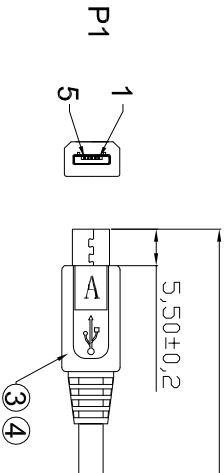
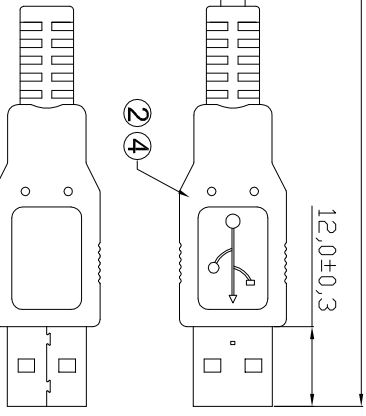
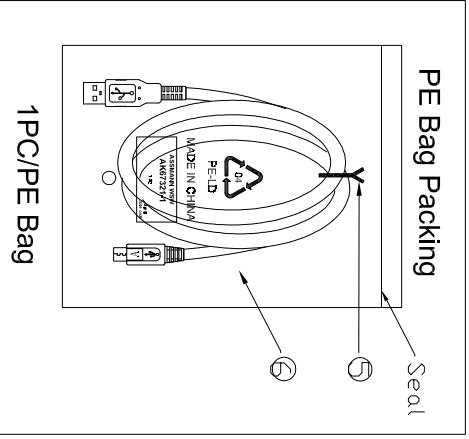
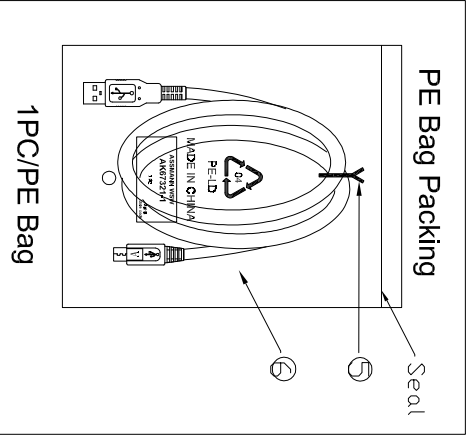
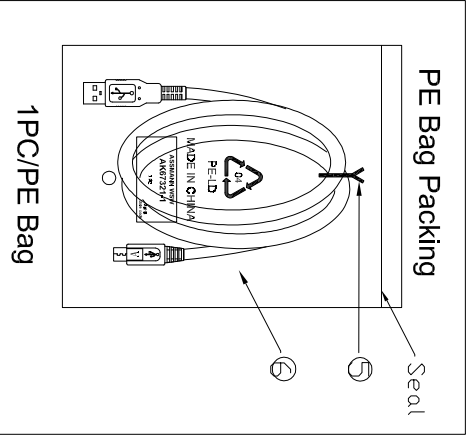
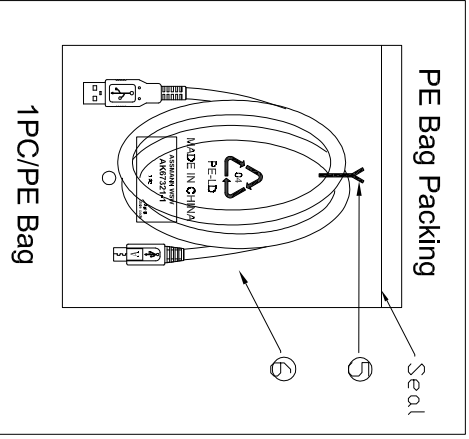


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| B | length | | | | | | |
| C |  | | | | | | |
| D |  | | | | | | |
| E |  | | | | | | |
| F |  | | | | | | |
| G |  | | | | | | |
| H |  | | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |

Cable White print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
AWM I/II A 80°C 30V FT1 USB CABLE

- Electrical test:**
- 100% short, open, miss wire test
 - Conduct resistance: 2 Ohm max.
 - Insulator resistance: 10Mohm min.
 - Dielectric test: DC 300V

PIN ASSIGNMENT

| P1 | P2 |
|-------------------|-------|
| 1 Red | 1 |
| 2 White | 2 |
| 3 Green | 3 |
| 4+5 Black | 4 |
| Shell Drain+Braid | Shell |

| WSW P/N | Jacket color | Length(mm) |
|-------------|--------------|------------|
| AK67321-0.5 | Black | 500±15 |
| AK67321-1 | Black | 1000±20 |
| AK67321-2 | Black | 2000±20 |
| AK67321-3 | Black | 3000±30 |
| AK67321-5 | Black | 5000±50 |

| NO. | NAME: | QTY | DATE | NAME |
|-----|------------|-----|------|------|
| ① | PE Bag | 1 | | |
| ② | TIE | 1 | | |
| ③ | Out Jacket | NA | | |
| ④ | CONN | 1 | | |
| ⑤ | CONN | 1 | | |
| ⑥ | Cable | 1 | | |

SPECIFICATION

| | |
|---|---|
| ① | Clear Print black "MADE IN CHINA"+ "1PC" |
| ② | Micro USB 5P A Male Shell:Nickel Pin:G/F Insulator color: Black solder type |
| ③ | USB 2.0 A Male Shell:Nickel Pin:G/F Insulator color: White solder type |
| ④ | USB 2.0 UL2725 (28#*1P+AL)+28#*2C+AEB Black OD:3.5mm |

RoHS compliant
 Unit: mm

| Scale | Free | Customer-No. |
|--------------|------------|-----------------|
| TOLERANCE | | ASSMANN WSW-No. |
| | | AK67321-X |
| DIM | TOL | Drawing-No. |
| | | ASS 7590 CA |
| Angle | TOL | Replace |
| | | Sheet |
| Id. | ① Drawn | rev00 |
| Modification | | |
| Date | 21.03.2016 | |
| Name | Amy | |

