

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

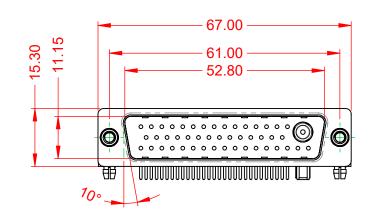




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.
DIELEOTINO	

WITHSTANDING VOLTAGE:

.X ±0.25 .XX ±0.13 .XXX ±0.05

			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
[	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	YOUR CONNECTION TO QUALITY & SERVICE SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-47W1640-4TD IS		ISSUE
		PART NUMBER: 629-47W	1640-4TD	1	

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



STEEL, TIN PLATED

