

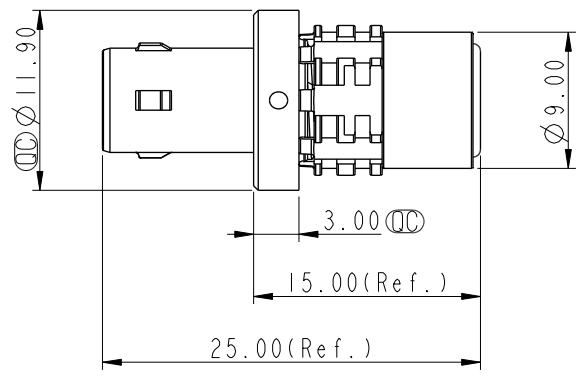



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| REV. | ECN NO. | DATE       | SIGN          | DESCRIPTION      |
|------|---------|------------|---------------|------------------|
| A    |         | 2021/03/12 | Vincent Huang | Rev.01 to A      |
| B    | C211268 | 2021/08/17 | Vincent Huang | $\triangle B$ XI |

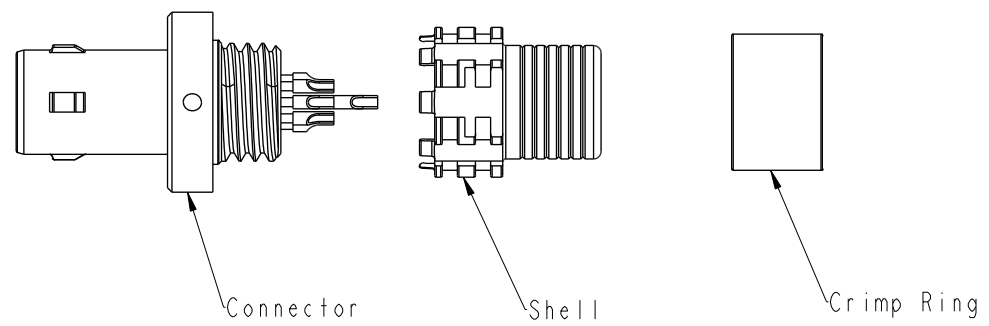

KEYING INDICATION  
(Brown)

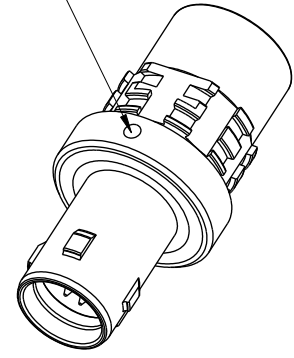

- Notes:
- \* RoHS Compliant.
  - \*  $\text{\textcircled{C}}$  Important Dimension.
  - \* Waterproof Rate: IPX8, Mated 1m/24h.
  - \* Connector
    - Housing: Thermoplastic, Natural.
    - Pin: Copper Alloy, Gold Plated.
    - Extension Nut: Metal.
  - \* Shell: Metal, Cable OD:  $\varnothing 5.50\text{mm}$  Max.
  - \* Crimp Ring: Metal.
  - $\triangle B$  \* Crimp Ring is packed separately in PE bag.

|                      |  |
|----------------------|--|
| UNIT:mm              |  |
| TOLERANCE            |  |
| $\pm 0.5 \text{ mm}$ |  |


|   |               |  |  |
|---|---------------|--|--|
| TITLE<br>FLO, DY-SER, SIZE 0, FI M<br>M, SOLDER |               |  |  |
| SCALE<br>2:1                                    | SIZE<br>A4    | SHEET<br>1 OF 2                            |  |
| REV.<br>B                                       | WC-REV.<br>.0 | $\text{\textcircled{C}}$ : Inspection item |  |

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

|                                |                           |                    |
|--------------------------------|---------------------------|--------------------|
| ITEM NO.                       | DRAWN BY<br>Vincent Huang | DATE<br>2020/11/25 |
| DWG NO.<br>FDYB-XXAIMS-RDK-000 | CHECKED BY<br>Aric Ko     | DATE<br>2020/11/25 |
| CUSTOMER<br>ALTW               | APPROVED BY<br>Max Yang   | DATE<br>2020/11/25 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


FDYB-XXA1MS-RDK-000

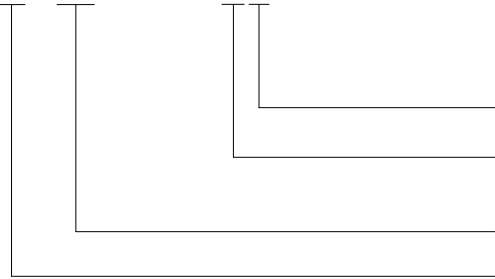

Housing Material & Surface Plating ①  
 Key Point ②  
 XX:No. Of Pin ③  
 Size(Connector)

|         |                                       |       |         |           |       |       |        |
|---------|---------------------------------------|-------|---------|-----------|-------|-------|--------|
| Code ①  | Housing Material & Surface Plating    |       | Code ②  | Key Point |       |       |        |
|         | D                                     |       | Graphic | R (Brown) |       |       |        |
|         | AL ALLOY/BK Cr                        |       |         |           |       |       |        |
| Code ③  | Pin Configuration (Solder Definition) |       |         |           |       |       |        |
| Graphic |                                       |       |         |           |       |       |        |
|         | 2 PIN                                 | 3 PIN | 4 PIN   | 5 PIN     | 7 PIN | 9 PIN | 10 PIN |

UNIT:mm



TOLERANCE

±0.5 mm

|   |               |                     |  |
|---|---------------|---------------------|--|
| TITLE<br>FLO, DY-SER, SIZE 0, FI M<br>M, SOLDER |               |                     |  |
| SCALE<br>2:1                                    | SIZE<br>A4    | SHEET<br>2 OF 2     |  |
| REV.<br>B                                       | WC-REV.<br>.0 | QC: Inspection item |  |

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

|                               |                           |                    |
|-------------------------------|---------------------------|--------------------|
| ITEM NO                       | DRAWN BY<br>Vincent Huang | DATE<br>2020/11/25 |
| DWG NO<br>FDYB-XXAIMS-RDK-000 | CHECKED BY<br>Aric Ko     | DATE<br>2020/11/25 |
| CUSTOMER<br>ALTW              | APPROVED BY<br>Max Yang   | DATE<br>2020/11/25 |