


- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 5 PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA. MARKING ON THIS SIDE.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

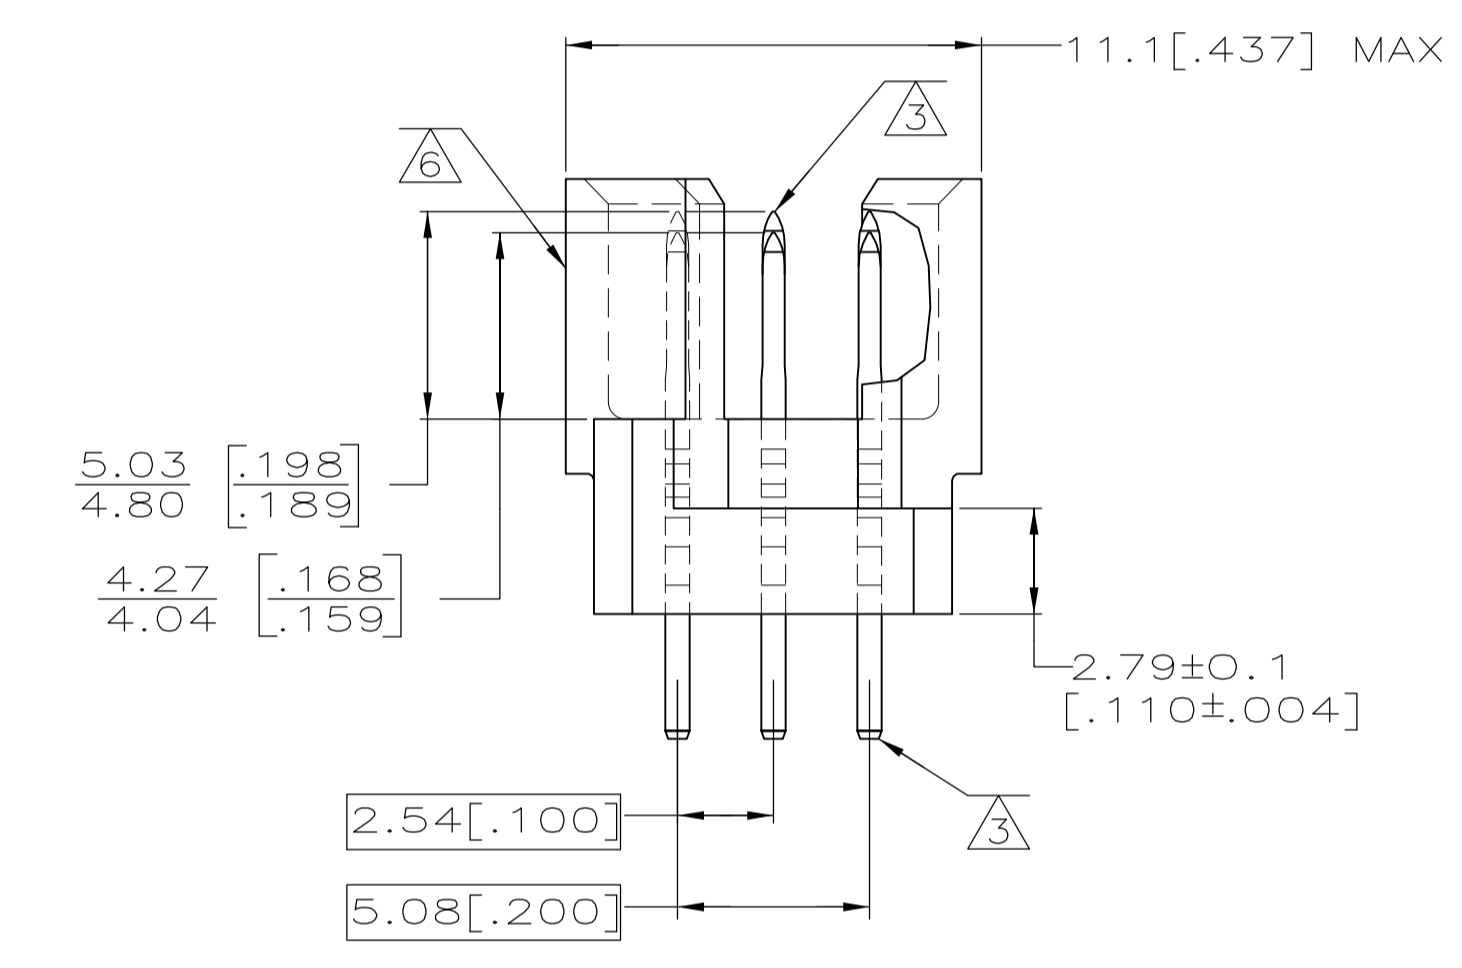

7 OBSOLETE

27-29	1-13, 15-17, 19, 21-23, 25, 31, 32	X	-	-	26	5148646-2
27-29	1-13, 15-17, 19, 21-23, 25, 31, 32	-	X	-	26	
27-29	1-13, 15-17, 19, 21-23, 25, 31, 32	-	-	X	26	
NONE	1-32	X	-	-	32	5148646-1
NONE	1-32	-	X	-	32	
1&32	2-31	-	-	X	32	
POSITIONS LOADED WITH 4.93[.194] CONTACTS	POSITIONS LOADED WITH 4.16[.164] CONTACTS	C	B	A	NO. OF LOADED POSITION	PART NUMBER
		ROWS LOADED				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE 10DEC05	TE Connectivity NAME: ASSEMBLY, PIN, TYPE R, EUROCARD, 96 POSITION, 3.30[.130] SOLDER POSTS, WITH MFBL CONTACTS
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD A. SHARPE 10DEC05 PRODUCT SPEC APPLICATION SPEC WEIGHT - CUSTOMER DRAWING	SIZE: A1 CAGE CODE: 00779 DRAWING NO: 5148646 SCALE: 5:1 SHEET: 1 of 1 REV: B	