





RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW)
 EMPFOHLENES LEITERPLATTEN-LAYOUT (BESTUECKUNGSSEITE)
 TOL ±0.05 mm unless noted

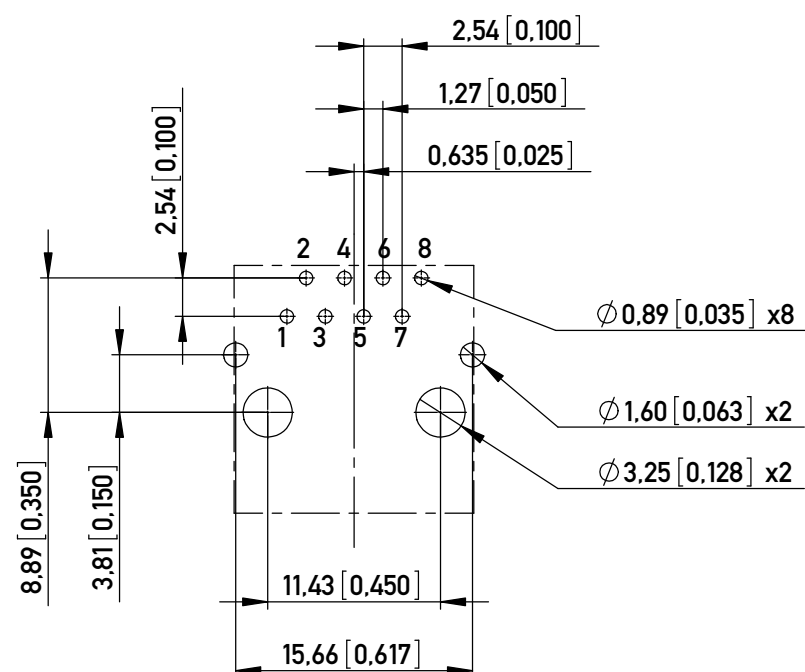

RECOMMENDED PANEL CUTOUT
 EMPFOHLENER FRONTPLATTEN-AUSSCHNITT

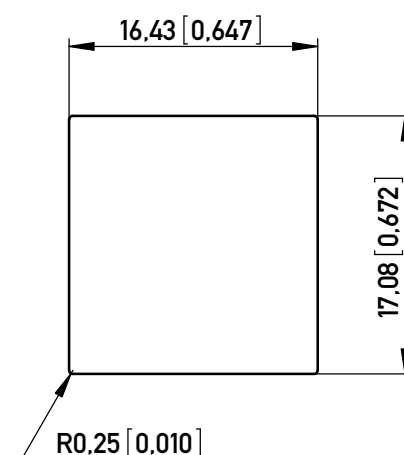

CONTACT DESIGN



NOTE 1: RoHS COMPLIANT

PART NO. IDENT. NR.	TRANSMISSION REQUIREMENT ÜBERTRAGUNGSANFORDERUNG	CONTACT FINISH KONTAKTOBERFLÄCHE	OPERATION TEMPERATURE BETRIEBSTEMPERATUR
133934	CAT 5	50 µinAu	0 to +70°C
203512	CAT 5	30 µinAu	-40° to +85°C
133184	CAT 5	30 µinAu	0 to +70°C
133183	CAT 3/4	30 µinAu	0 to +70°C

Information:		Tolerances x.xx = ±0.25 mm	All Dimensions in mm [in]	Scale 2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation MOD JACK - MJHV 8P8C, 1X1, VERTICAL
www.ERNI.com		133819		I A3
j	13.01.2020	Class MJ		
Index	Date			

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16016 to be observed.