





ISSUE NUMBER	
ORIGINAL	

(1)

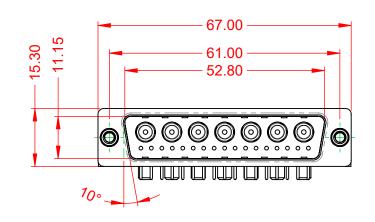




.XX ±0.13 .XXX ±0.05



MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

WITHSTANDING VOLTAGE:

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION D-SUB			DRAWN:	C.B	DATE: JAN. 01/20)19
				CHECKED	:	DATE:	
EDAC INC TORONTO, ONTARIO CANADA	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 OF	2	
	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-24W7240-7T4		7240-7T4	ISSUE		
YC	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUM	/BER: 629-24W	7240-7T4	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

