TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25


.XX ±0.13


.XXX ±0.10


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER
ORIGINAL (

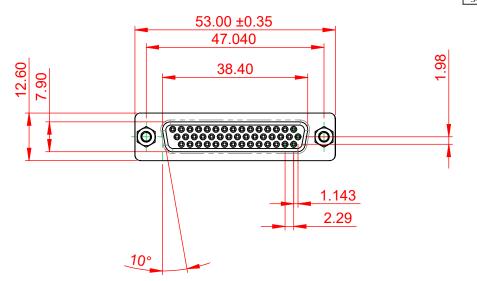







NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, 15µ GOLD PLATED

OPERATING TEMPERATURE: -55°C TO 85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: $25m\Omega$ MAX.

CONTACT RESISTANCE: $25m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES THE EUROPE 2011/65/EU F

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.





THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 628 ASSEMBLY	
	DRAWN: C.B	DATE: AUG. 01/2018
	CHECKED:	DATE:
	SCALE: 1:1	SHEET 1 OF 1
	DDAM(NO NUMBER COO 044 222 242	

DRAWING NUMBER: 638-044-332-243 ISSUE
PART NUMBER: 638-044-332-243 1