

6

5


4

3

2

1

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200980207	MM3G61PP4M010	1.0M +55.6mm -0 [3.28' +2.19" -0]
1200980208	MM3G61PP4M050	5.0M +165.1mm -0 [16.40' +6.50" -0]

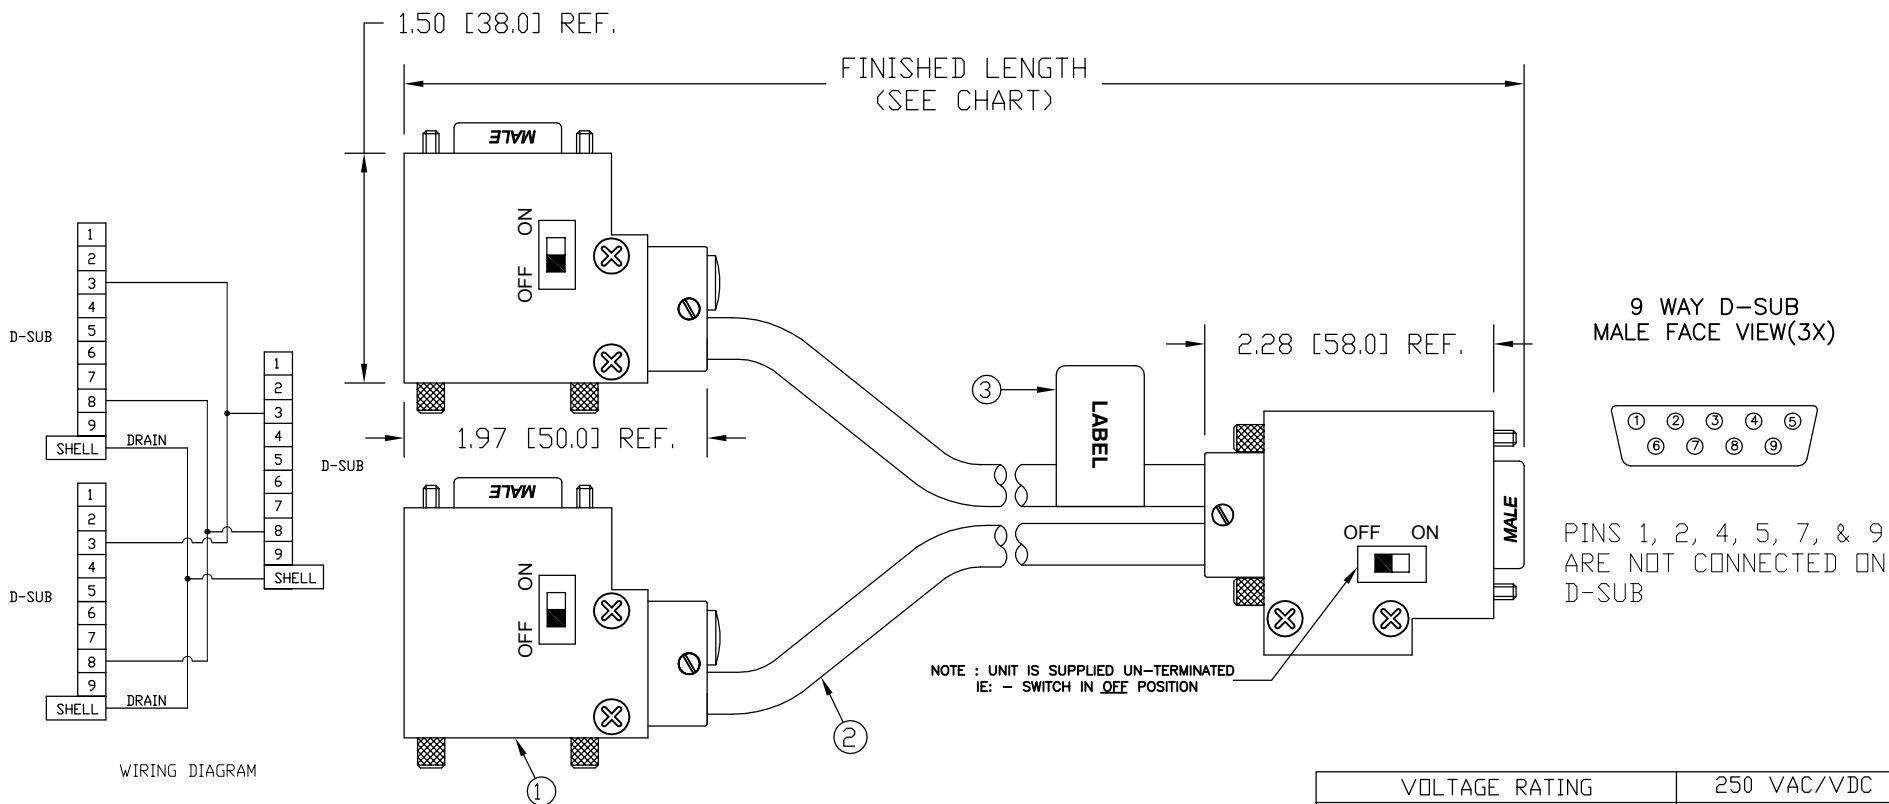

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE - D-SUB	0°C TO 60°C

ITEM	COMPONENT	MATERIAL	FINISH	RELEASED DRAWING EC NO: WELU2010-0081 DRWN: LHARTMAN 8/27/09 CHKD: BWOODMAN09/08/27 APPR: JFMURPHY 2009/08/28	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
						mm	INCH	IN/MM	NTS	INCH		
1	D-SUB	ABS	BLACK			4 PLACES	±----	±----	DRAWN BY	DATE	TITLE	D-SUB PROFIBUS HORIZ TO D-SUB(2) VERTICAL #22/2 SHLD PURPLE PUR
2	CABLE- 22 AWG, COPPER STRANDING< TWISTED PAIR, SHIELD WITH BRAID	PUR	PURPLE			3 PLACES	±----	±----	CHECKED BY	DATE	MOLEX INCORPORATED	
						2 PLACES	±----	±.01	APPROVED BY	DATE		
3	LABEL	MLYAR	BLACK/YELLOW	A		1 PLACE	±0.3	±----	JFMURPHY	2009/08/27	SD-120098-021	1 OF 1
						ANGULAR ±----		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6

5

4

3

2

1