



Jun. 2021 Ver.3.0
TDK Corporation

Multilayer Balun


For 698 - 960 MHz

HHM Series 1.0x0.5mm [EIA 0402] TYPE

P/N: **HHM1944A4**

HHM1944A4

SHAPES AND DIMENSIONS

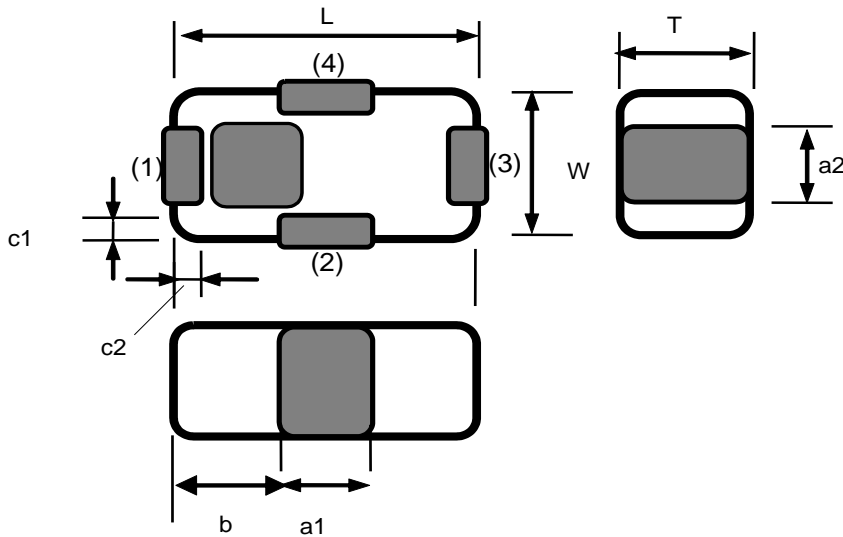

Dimensions (mm)

L	W	T	a1	a2	b	c1	c2
1.00	0.50	0.50	0.3	0.3	0.35	0.12	0.12
+/-0.05	+/-0.05	Max	+/-0.10	+/-0.10	+/-0.10	+/-0.07	+/-0.07

Terminal functions

(1)	Balanced Port
(2)	Unbalanced Port
(3)	Balanced Port
(4)	GND

TERMINATION FINISH

Material
Sn plate

HHM1944A4

■ ELECTRICAL CHARACTERISTICS

(Measurement)

Parameter	Frequency (MHz)	TDK Spec		
		Min.	Typ.	Max.
Unbalanced Port Characteristic Impedance (ohm)		50 (Nominal)		
Balanced Port Characteristic Impedance (ohm)		100 (Nominal)		
Return Loss@Unbalanced (dB)	698 to 960	15		-
Phase Balance (deg.)	698 to 960	167	180	193
Amplitude Balance (dB)	698 to 960	-4.0	0.0	4.0
Insertion Loss (dB)	698 to 960	-		1.00

Ta = +25+/-5°C

■ MAXIMUM RATINGS

Parameter		TDK Spec	Conditions
Operating temperature (°C)		-40 to +85 °C	
Storage temperature (°C)		-40 to +85 °C	
Power Handling (W) *1	Frequency (MHz)		
	698 to 960	4	Duty 50%
Human Body Model : HBM	@Each Port (V)	+/-1000	100pF / 1500ohm
Machine Model : MM	@Each Port (V)	+/-150	200pF / 0ohm
Charged Device Model : CDM	@Each Port (V)	+/-500	Humidity : 60%RH max


*1 : Refer to 3GPP TS 38.101-1 V15.2.0

HHM1944A4


FREQUENCY CHARACTERISTICS

HHM1944A4(UNBALANCE 50ohm/BALANCE 100ohm)


Return Loss

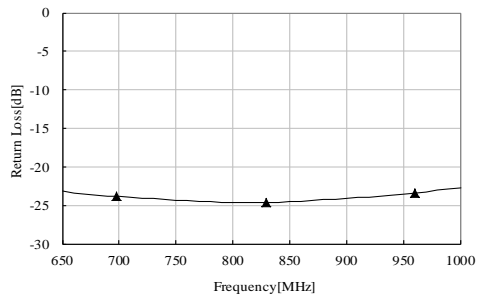


Amplitude Balance

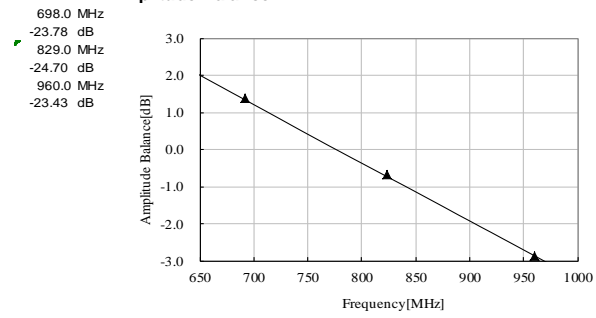

Insertion Loss

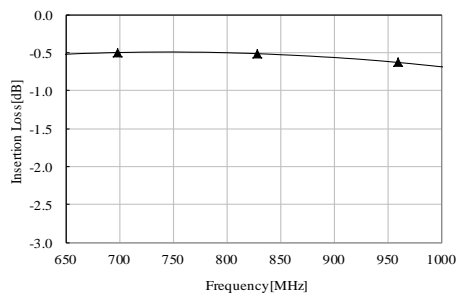


Phase Balance

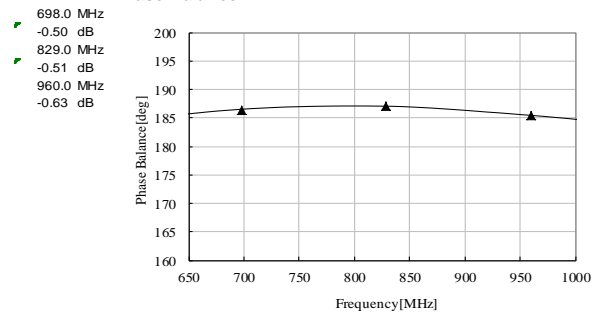

HHM1944A4

■ RECOMMENDED LAND PATTERN

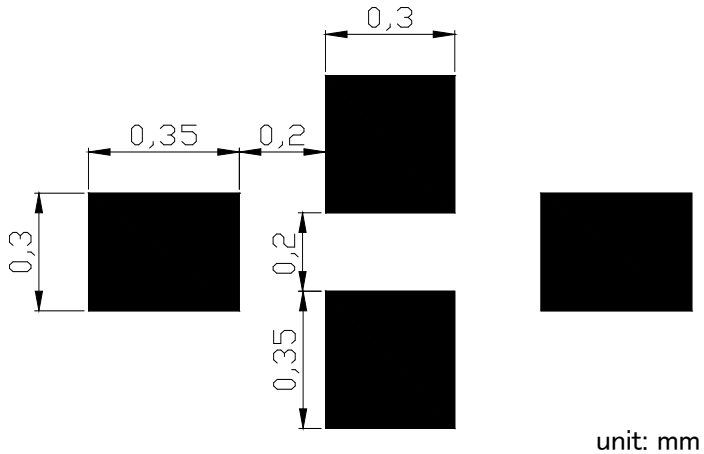


■ ENVIRONMENT INFORMATION

RoHS Statement
RoHS Compliance

HHM1944A4

RECOMMENDED REFLOW PROFILE

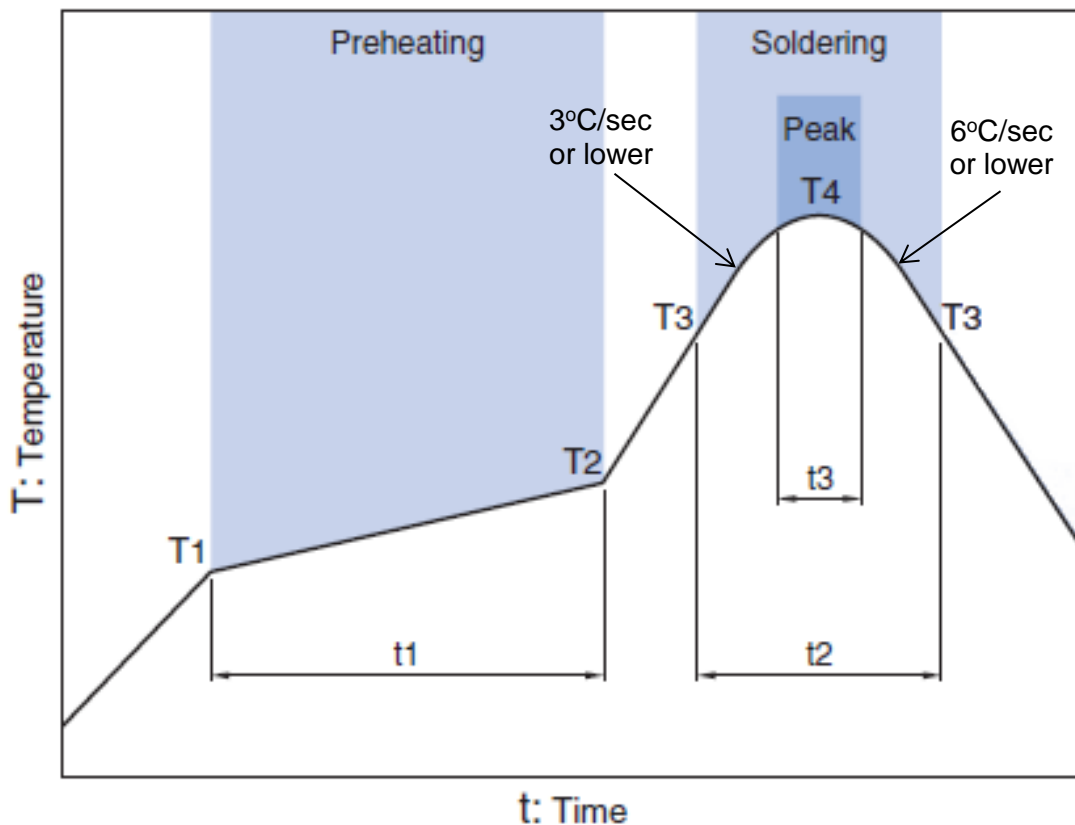

Preheating			Soldering			
Temp.		Time	Critical zone (T3 to T4)		Peak	
T1	T2	t1	T3	t2	T4	t3 *
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30 sec Max

* t3 : Time within 5°C of actual peak temperature


The maximum number of reflow is 3.

Note: Lead free solder is recommended.
Recommended solder is Sn-3.0Ag-0.5Cu. (M705 by Senju Metal Industry)


HHM1944A4

PACKAGING STYLE

Reel Dimensions

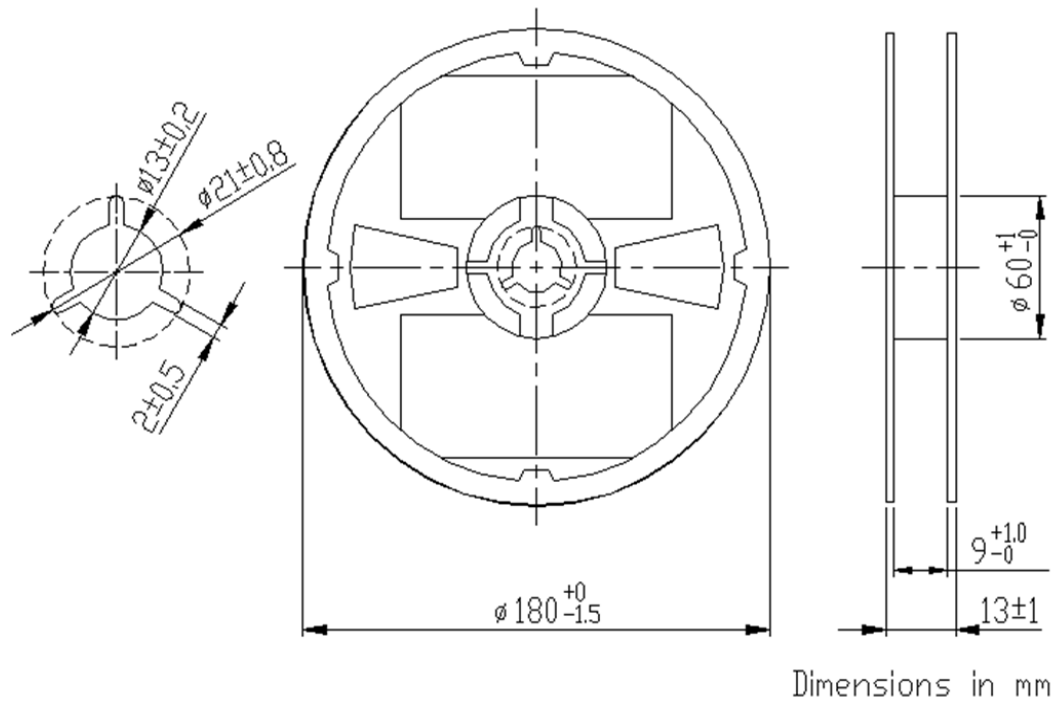

Carrier Tape

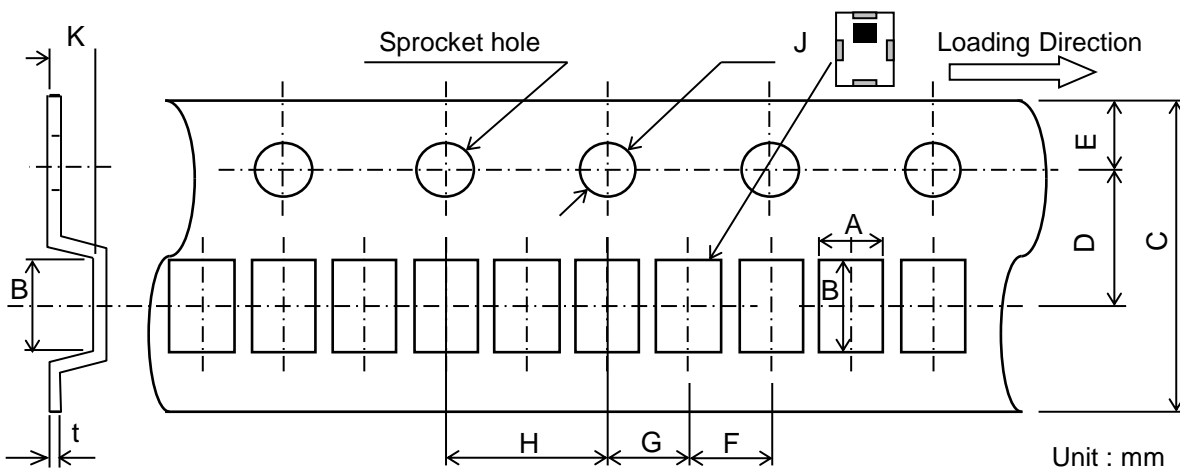

Dimensions (mm)

A	B	C	D	E	F	G	H	J	K	t
0.62	1.12	8.0	3.5	1.75	2.0	2.0	4.0	1.5	0.51	0.2
+/-0.05	+/-0.05	+/-0.2	+/-0.05	+/-0.1	+/-0.05	+/-0.05	+/-0.05	+0.1/-0	MAX	+/-0.05

STANDARD PACKAGE QUANTITY (pieces/reel)
10,000

All specifications are subject to change without notice.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

 REMINDERS
--

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

1. Aerospace/Aviation equipment
2. Transportation equipment (cars, electric trains, ships, etc.)
3. Medical equipment
4. Power-generation control equipment
5. Atomic energy-related equipment
6. Seabed equipment
7. Transportation control equipment
8. Public information-processing equipment
9. Military equipment
10. Electric heating apparatus, burning equipment
11. Disaster prevention/crime prevention equipment
12. Safety equipment
13. Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.