


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)

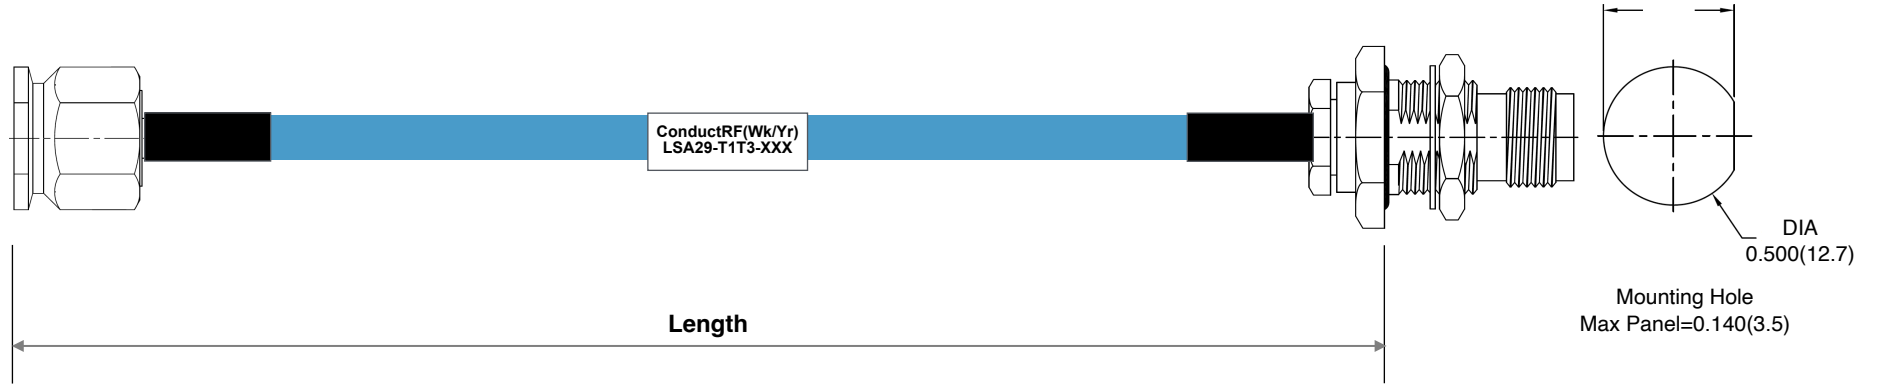

ConductRF # (XXX)	Length	Max. Insertion Loss(dB) - Typ		
		6GHz	12GHz	18GHz
S12	12"	0.55	0.81	1.03
S16	16"	0.67	1.00	1.26
S18	18"	0.73	1.09	1.38
S24	24"	0.91	1.36	1.73
S36	36"	1.28	1.91	2.43
S48	48"	1.64	2.45	3.13
S55	55"	1.85	2.77	3.54
S60	60"	2.00	3.00	3.84
VSWR Typ.		1.30:1	1.35:1	1.45:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

5	Label	FT.	AS NEEDED	Shrink Tube	Black
4	Strain Relief	FT.	AS NEEDED	Shrink Tube	Black
3	Flexible Spiral Coax	FT.	AS NEEDED	A29SS	Blue FEP
2	TNC BKHD Jack	EA.	1	PTM22B-A29N01	Nickel
1	TNC Str. Plug	EA.	1	PTM11B-A29G01	Nickel
ITEM	DESCRIPTION	UOM	QTY	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: Low Loss 0.141" Flexible TNC M to TNC BKHD - 18GHz	Range: LSA	Sheet 1 of 1	
1	Pre-Release		DG	07/15/22	Remarks: 035/035/10	Originated: 07/15/22	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Dwg Ref: LSA29-T1T3	
REVISION HISTORY					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 1	Part No: LSA29-T1T3-XXX