

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39014021	MiniFit Jr SR Recpt Hsg 2 CKT V-0	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	2	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	-	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	-	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

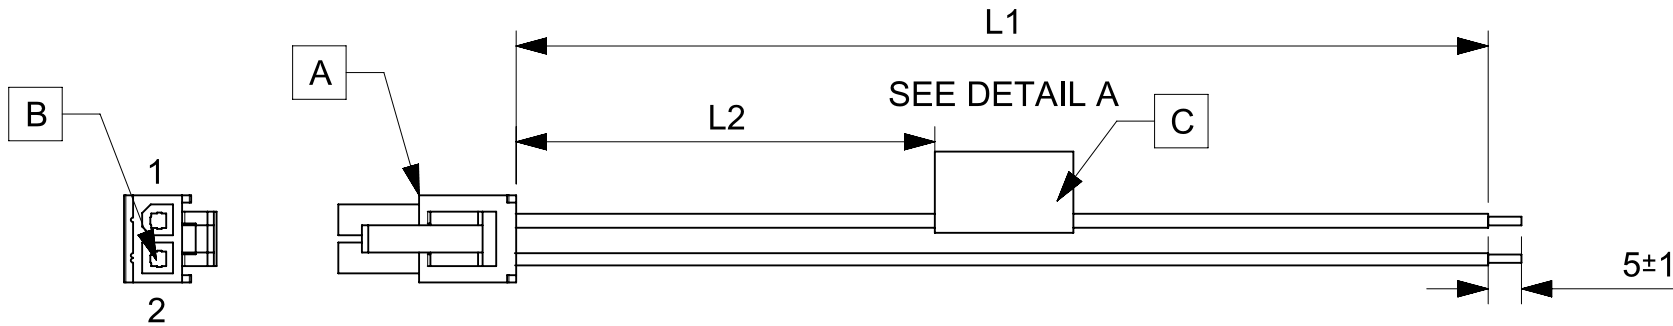


TABLE			
PART NUMBER	L1	L2	TITLE
2153211021	150±8	63 REF	MINIFIT JR SR R-S 2 CIRCUIT 150MM Sn
2153211022	300±10	138 REF	MINIFIT JR SR R-S 2 CIRCUIT 300MM Sn
2153211023	600±10	288 REF	MINIFIT JR SR R-S 2 CIRCUIT 600MM Sn

NOTES

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
 MOLEX
 BATCH WK/YR
 DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 638380		
	mm	NTS	DRWN: AS20 2020/04/06		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2020/05/28		
ANGULAR TOL ± °		APPR: RDESAI01 2020/05/28		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE
3 PLACES ±		DRWN: AS20 2020/04/06		2153211021	PSD
2 PLACES ±		APPR: RDESAI01 2020/05/28		000	REVISION
1 PLACE ±		THIRD ANGLE PROJECTION		A	
0 PLACES ±		DRAWING		SHEET NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SERIES		MATERIAL NUMBER	
		A4-SIZE		SEE TABLE	
		215321		CUSTOMER	
				GENERAL MARKET	

DOCUMENT STATUS	P1	RELEASE DATE	2020/05/28	03:12:44
-----------------	----	--------------	------------	----------