
_				
Ŧ	Q	П	m	C C





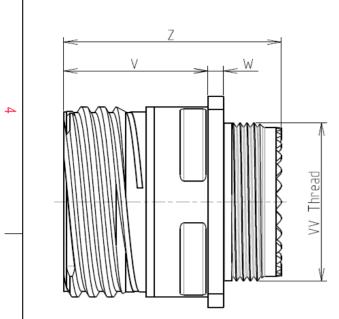

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 29.53 g ± 10%

8D 0

G

11

Κ

01

Ρ


F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

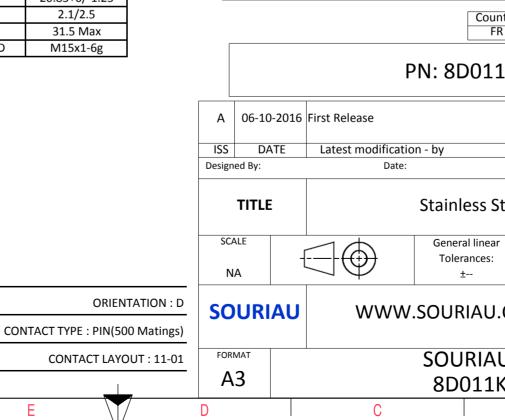

	Φ		A		
					4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR	non-conformit ch does not co he Parties or k on, technical n Jurisd	mply with by a third par			2
					-
		CUSTOME	R DRAWING	MOD N°	
Steel Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
				perty of	1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET	
.KU	1PD-C		٨	1/2	J
	В		А		

		۵	п	m	D	0	
		Contact Layout				Panel Cu	tout
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc	1#12 11-01 X Y]		₩ ₩	ØT.	
ى ن	A	0 0				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe	whi er of
N						(professional recommen Cou F PN: 8D01	intry R
					A 06-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
-					SCALE NA	Stainless S General linea Tolerances: ±	ar
					FORMAT A3	SOURIA 8D011	U
	Н	G	l F	E	D	C	

