

## Specification Sheet


Part Number: T120R0PPH4

Polypropylene cable ties deliver excellent resistance to chemicals and salts.

Inside serrations provide strong grip on cables and wire bundles.

Easy application either manually or with a tensioning tool.

Bent tail ensures a quick and simple installation.

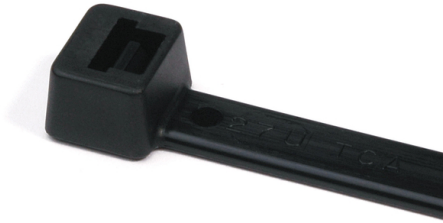

Cable Tie, 15" Long, 60lb Tensile Strength, PP, Black, 500/pkg

Article Number 111-12066

Type T120R

Color Black (BK)

Quantity Per bag

**Product Description** HellermannTyton's polypropylene cable ties offer added resistance to most chemicals. T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. The head design guarantees high tensile strength and a low insertion force. The bent tail design allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.

**Short Description** Cable Tie, 15" Long, 60lb Tensile Strength, PP, Black, 500/pkg

Global Part Name T120R-PP-BK

Minimum Tensile Strength (Imperial) 60.0

Minimum Tensile Strength (Metric) 535.0

Length L (Imperial) 15.0

Length L (Metric) 387.0

Identification Plate Position none

Releasable Closure No

Tie Closure plastic pawl

Variant Inside Serrated

Width W (Imperial) 0.30

Width W (Metric) 7.6

Bundle Diameter Min (Imperial) 0.50

Bundle Diameter Min (Metric) 5.0

Bundle Diameter Max (Imperial) 4.13

Bundle Diameter Max (Metric) 105.0

Thickness T (Imperial) 0.07

Thickness T (Metric)	1.8
Material	Polypropylene (PP)
Material Shortcut	PP
Flammability	UL 94 HB
Halogen Free	Yes
UV Resistant (Yes/No)	No
Operating Temperature	-40°F to +239°F (-40°C to +115°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

