
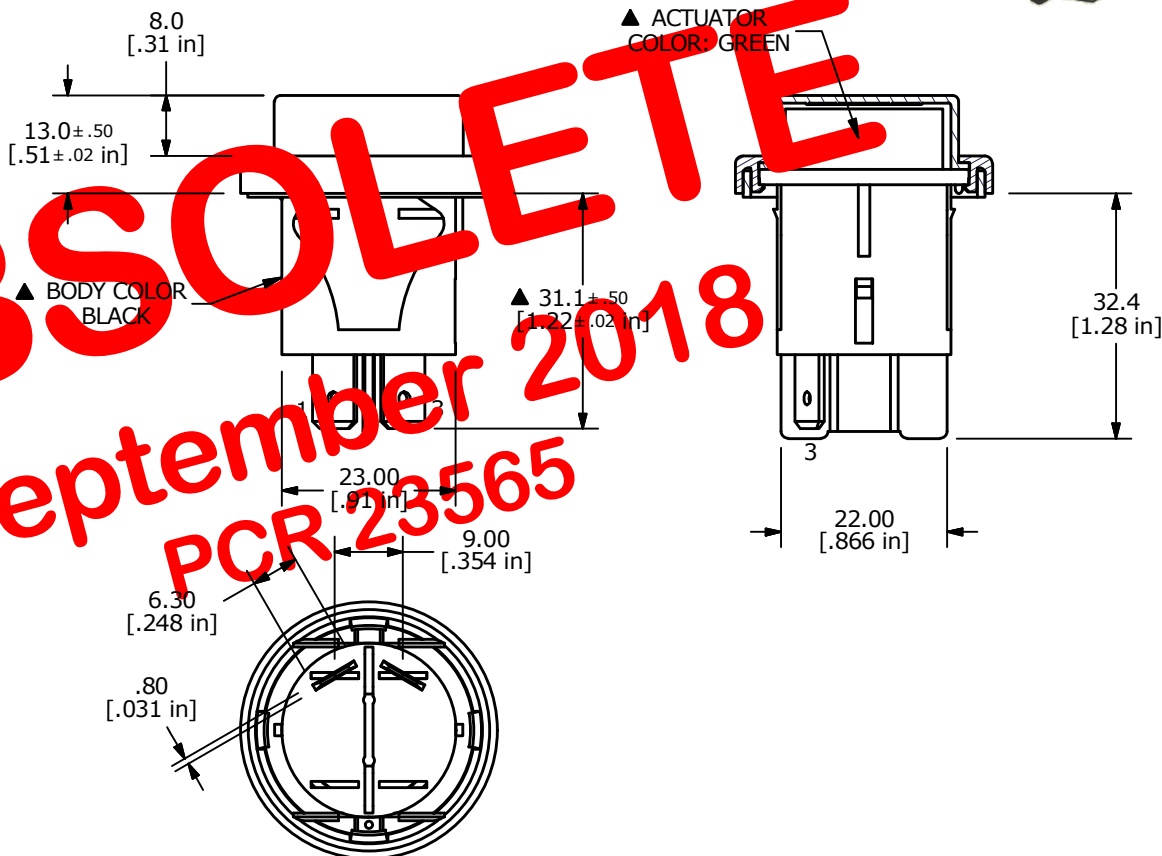


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1, 2

(ON) = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = 0.4
X.XX = 0.25
- TERMINAL NO'S FOR REFERENCE ONLY.
- CONTACT RATINGS:
ANSI/UL 1054 AND CAN/CSA C22.2 NO.55 (E194579)
16A 125VAC [UR, cUR]
1/2HP 125VAC, 3/4HP 250VAC [UR, cUR]
EN 61058-1: 2002:
16(6)A 250V~ 1E4 T125/55 [ENEC14]
10(4)A 250V~ 5E4 T125/55 [ENEC14]
- CONTACT RESISTANCE: 35mΩ MAX. INITIAL @ 50VAC
- INSULATION RESISTANCE: 100MΩ @ 500VDC
- DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE
- ELERTICAL LIFE: 6,000 CYCLES [UR, cUR]
10,000 CYCLES [VDE]
50,000 CYCLES [VDE]
- OPERATING TEMP: -20°C to 105°C [UR, cUR]
-20°C to 125°C [ENEC14]
- ▲ DENOTE CRITICAL PARAMETER
- 2011/65/EU (ROHS) COMPLIANT

OBSOLETE
September 2018
PCR 23565



B	23287	update Rating to remove SEMCO	7/12/18	MW
A	20498	RELEASE TO PRODUCTION	02/22/12	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

E-SWITCH®				
TITLE PR144C1800-ACC-F03-1				
SCALE	DATE	DR	DWG	REV
1:1	2/22/2012	BMA	38-PR1S00220	B