

**■ Features**

- Single output to 45-48W
- 100-240Vac Universal input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 120mV
- OVP, OCP, SCP, and Overload protection
- Efficiency level: VI
- Available Plug types: US, EU, AU, UK plug
- Dimension: 76x50x32.5mm (exclude plug)



\*Product images are for illustrative purposes only and may vary from actual design.

**■ Application**


- Consumer electronics, Telecom and office equipment
- Industrial equipment


**■ Model List**

**Custom Designs Available!**

Model	Output Voltage	Output Current	Power	Certifications
WM048S-090-X-XX	9V	5A	45W	UL, CE
WM048S-120-X-XX	12V	4A	48W	UL, CE
WM048S-150-X-XX	15V	3.2A	48W	UL, CE
WM048S-180-X-XX	18V	2.66A	48W	UL, CE
WM048S-240-X-XX	24V	2A	48W	UL, CE

**■ Mechanical Diagram**

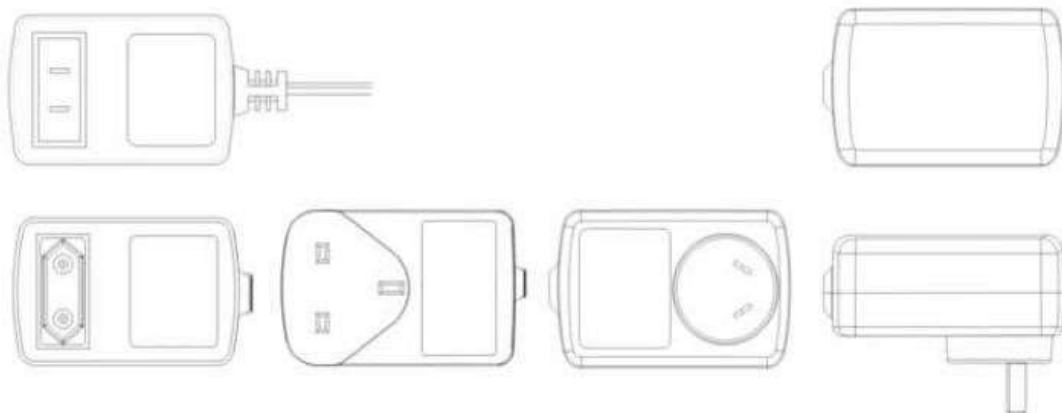

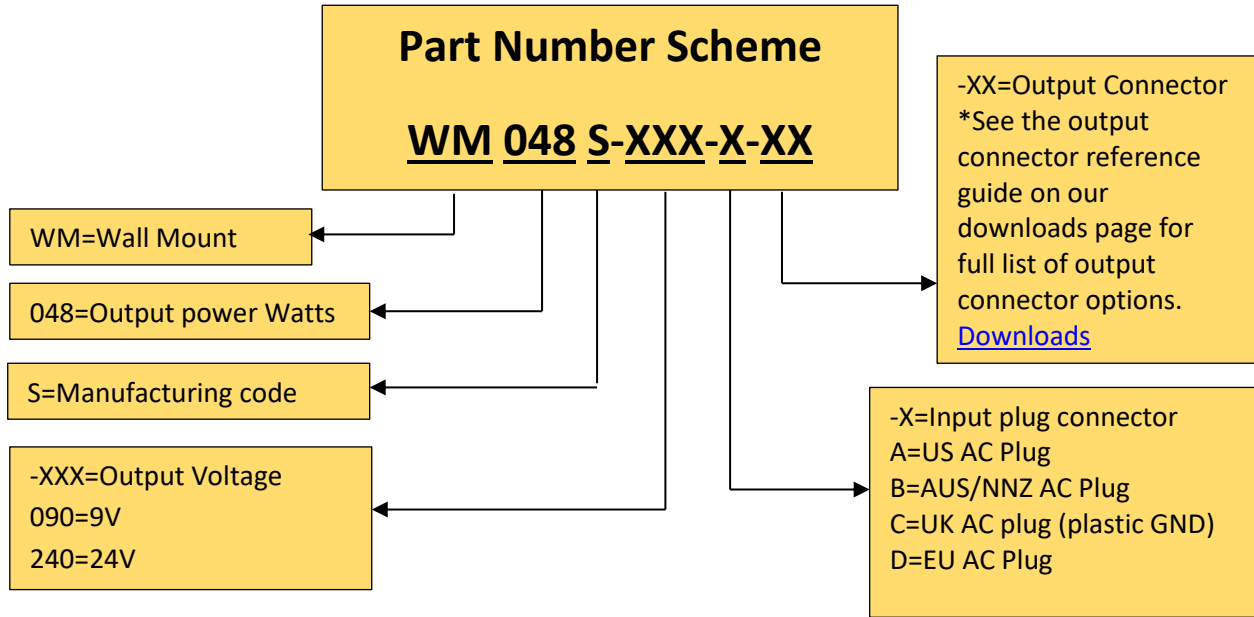

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**