


Series
NSX

CAVITY REDUCER FROM REAR RELEASE, REAR REMOVABLE SIZE 5
TO REAR RELEASE, REAR REMOVABLE SIZE 12 FOR SOCKET CONTACT

Issue:
Nov. 24, 2015

Page
1/1

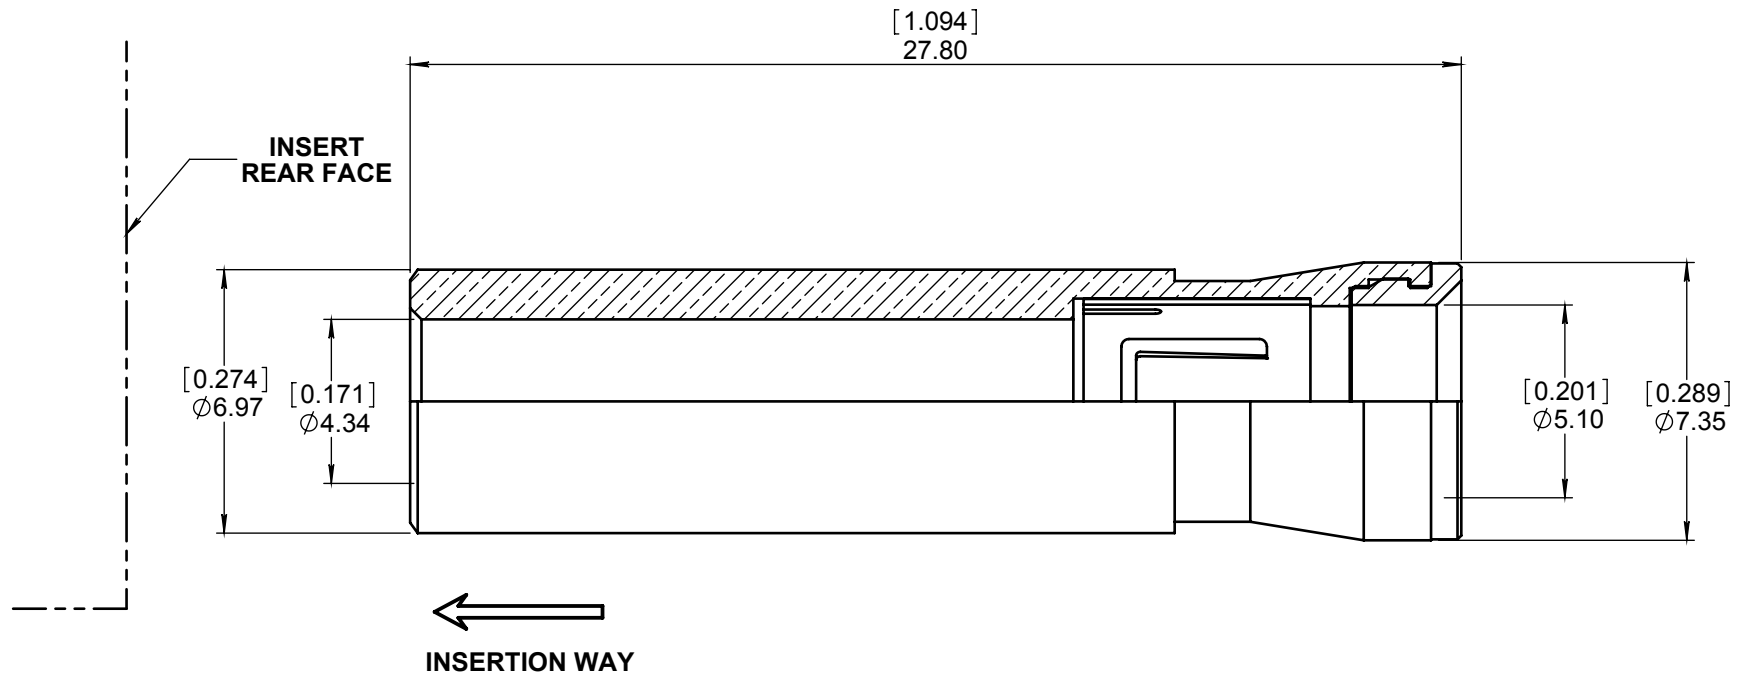


This cavity reducer shall be installed inside a Socket size 5 cavity, it shall be inserted from the rear side of the plug connector.

MATERIAL AND FINISH :
RETENTION CLIP : COPPER ALLOY
BODY : COPPER ALLOY - GOLD OVER NICKEL PLATED
INSULATOR : PTFE

ONCE INSTALLED , THEY CANNOT BE REMOVED

TOOL TO INSERT REDUCER IN THE INSERT CAVITY : 282 521 006

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 4,63 g

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN:				
NOM: VALGRESY				
DATE: SEPT 12, 1995	Nov. 24, 15	Modified title	Legendre T.	Branjonneau
APPR.: BALDYROU A.	July 30, 03	Added insertion tool P/N	Couthon S.	Macari JP.
	Issue	Revisions	Name	Approved