

工	ם م	П	Ш	C C



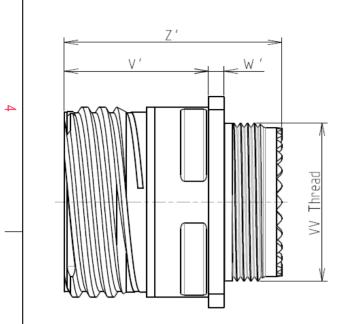

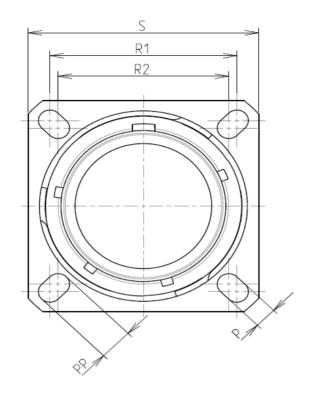

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

PLATING : J =

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +175°C -Temperature Range

: 2000 hours


Olive drab Cadmium

8D 0

G

11

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 20.62 R1 18.26 R2 S 26.2±0.3 ۷' 19.5+1.4/-0 W' 2.1/3.65 Ζ' 32 Max

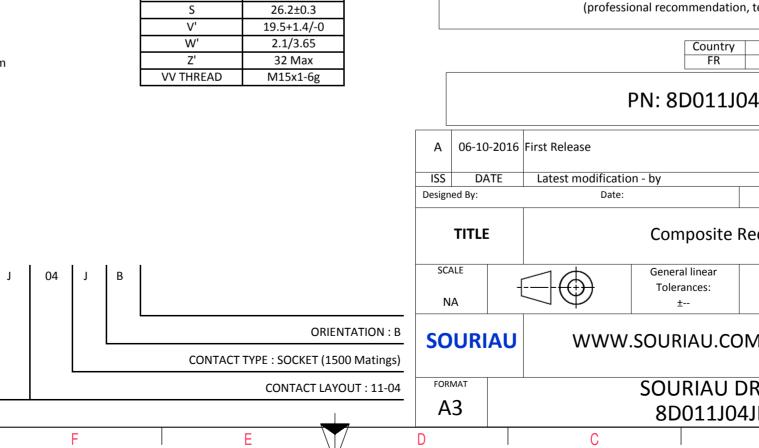

0		σ				
					4	
LAY	OUT SHOWN AS EXA	MPLE			3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D011J04JB						
First Release						
Latest modificatio Date:	n - by		CUSTOMER DRAWING	MOD N°	<u> </u>	
Composite Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT 859		1	
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
SOURIAU DRG N° SHEET 8D011J04JB-C 1/2			SHEET 1/2			
С		В	A	1	J	

r	Ŧ	ര	п П	m	D	0
		Contact Layout				Panel Cutor
4	-×	$ \begin{array}{c} $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numt size no. cont 11 -4 4	X-axis Y-axis (mm) +.065 (1.65) .065 (1.65) +.065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65)			2	ØT
ω						Dim ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o
N						(professional recommendate Countre FR PN: 8D011
					A 06-10-20 ISS DATE Designed By:	016 First Release
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	
		1	1		FORMAT A3	SOURIAU 8D011J
	Н	l G	F	E	D	C

