


End A

End B

Length in Meter (-0/+50mm≤1M;1M<-0/+100mm<10M;-0/+1%L ≥10M)

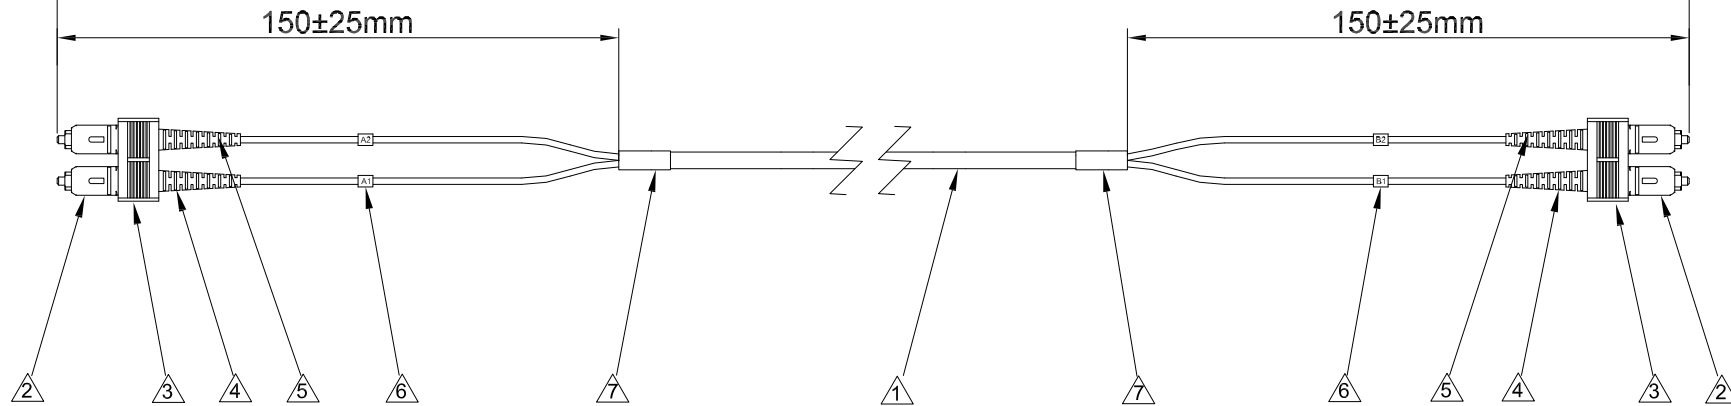

Notes:

- 1. Insertion Loss: <0.3dB.
- 2. Return Loss: > 20dB.
- 3. Fiber Extension: -100nm<H<+100nm.
- 4. Ferrule End-Face Radius: 10<R<25mm.
- 5. Apex Offset: ≤50um.
- 6. Increase in insertion loss after 500 mating: 0.2dB Max.
- 7. Operation Temperature: -40°C to +75°C.
- 8. Storage Temperature: -40°C to +80°C.

WSW PN	Length
DK-2622-01	1m
DK-2622-02	2m
DK-2622-03	3m
DK-2622-05	5m
DK-2622-07	7m
DK-2622-10	10m

No.	Specifications	Qty
①	2.8x5.7mm OM1 62.5/125 Duplex Cable / LSZH / Orange	1
②	3.0mm SC/PC MM Duplex Connector / Beige	4
③	SC Duplex Clip / Beige	2
④	SC 3.0mm Boot / Black	2
⑤	SC 3.0mm Boot / Red	2
⑥	Tail Identification Marker (C-Clip)/ NO. A1, A2, B1, B2	4
⑦	Heat shrink Tube / Black	2

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	14.08.2019	Segal
						Approved	14.08.2019	Segal
								ASSMANN WSW-No. DK-2622-xx
DIM	TOL							Drawing-No. ASS 8607 CA rev00
		©	Drawn	14.08.2019	Segal			Sheet
Angle	TOL	Id.	Modification	Date	Name			Replace

1

2

3

4

5

6

7